


Chassis Mounting Transformers

230V Single Primary



6VA to 200VA

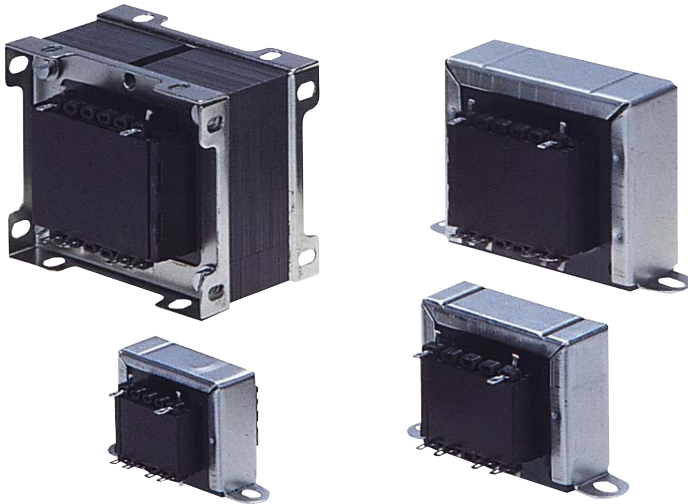

Features:

- Chassis mounting low voltage mains transformers with 230V ac primary winding.
- 2 secondary winding that can be connected in series or parallel.
- Double section bobbins on interleaved lamination provide 3.75kV isolation.
- Fixing by clamp on models up to 50VA, and frame construction above.
- Tested to meet EN60065.

Specifications

VA	Dimensions				Fixing Style	Weight (kg)	Typical Regulation (%)
	Width	Depth	Height	FC			
6	45	40	37	54	Clamp	0.2	25
12	59	50	50	72		0.4	12
20		56				0.55	10
50	79	62	65	92		1.0	
75		75	67	54 x 54	Frame	1.5	
100	89	68	75	57 x 44		1.6	
150	100	78	85	72 x 58		2.2	
200		90		72 x 68		2.8	7

Dimensions : Millimetres

Chassis Mounting Transformers

230V Single Primary



Part Numbers

Rating	Load	Part Number
0-5V, 0-5V @ 0.6A	6VA - 25% Typical Regulation	696390
0-6V, 0-6V @ 0.5A		696407
0-9V, 0-9V @ 0.33A		696419
0-12V, 0-12V @ 0.25A		696420
0-15V, 0-15V @ 0.2A		696432
0-18V, 0-18V @ 0.17A		696444
0-20V, 0-20V @ 0.15A		696456
0-24V, 0-24V @ 0.12A		696468
0-5V, 0-5V @ 1.2A	12VA - 12% Typical Regulation	696470
0-6V, 0-6V @ 1A		696481
0-9V, 0-9V @ 0.67A		696493
0-12V, 0-12V @ 0.5A		696500
0-15V, 0-15V @ 0.4A		696511
0-18V, 0-18V @ 0.33A		696523
0-20V, 0-20V @ 0.3A		696535
0-24V, 0-24V @ 0.25A		696547
0-5V, 0-5V @ 2A	20VA - 10% Typical Regulation	696559
0-6V, 0-6V @ 1.67A		696560
0-6.3V, 0-6.3V @ 1.59A		696572
0-9V, 0-9V @ 1.1A		696584
0-12V, 0-12V @ 0.83A		696596
0-18V, 0-18V @ 0.55A		696602
0-20V, 0-20V @ 0.5A		696614
0-24V, 0-24V @ 0.42A		696612
0-6V, 0-6V @ 4.17A	50VA - 10% Typical Regulation	696638
0-9V, 0-9V @ 2.78A		696640
0-12V, 0-12V @ 2.08A		696651
0-15V, 0-15V @ 1.67A		696663
0-18V, 0-18V @ 1.39A		696675
0-20V, 0-20V @ 1.25A		696687
0-24V, 0-24V @ 1.04A		696699



Chassis Mounting Transformers

230V Single Primary



Part Numbers

Rating	Load	Part Number
0-6V, 0-6V @ 6.25A	75VA - 10% Typical Regulation	696705
0-9V, 0-9V @ 4.17A		696717
0-12V, 0-12V @ 3.12A		696729
0-15V, 0-15V @ 2.5A		696730
0-18V, 0-18V @ 2.08A		696742
0-24V, 0-24V @ 1.56A		696754
0-50V, 0-50V @ 0.75A		696766
0-6V, 0-6V @ 8.33A	100VA - 10% Typical Regulation	696778
0-9V, 0-9V @ 5.55A		696780
0-12V, 0-12V @ 4.17A		696791
0-15V, 0-15V @ 3.33A		696808
0-18V, 0-18V @ 2.78A		696810
0-20V, 0-20V @ 2.5A		696821
0-24V, 0-24V @ 2.08A		696833
0-30V, 0-30V @ 1.67A		696845
0-50V, 0-50V @ 1A		696857
0-6V, 0-6V @ 12.5A	150VA - 10% Typical Regulation	696869
0-9V, 0-9V @ 8.33A		696870
0-12V, 0-12V @ 6.25A		696882
0-15V, 0-15V @ 5A		696894
0-18V, 0-18V @ 4.17A		696900
0-24V, 0-24V @ 3.12A		696912
0-50V, 0-50V @ 1.5A		696924
0-6V, 0-6V @ 16.7A	200VA - 7% Typical Regulation	696936
0-9V, 0-9V @ 11.1A		696948
0-12V, 0-12V @ 8.3A		696950
0-15V, 0-15V @ 6.67A		696961
0-18V, 0-18V @ 5.55A		696973
0-20V, 0-20V @ 5A		696985
0-24V, 0-24V @ 4.17A		696997
0-30V, 0-30V @ 3.33A		697000
0-50V, 0-50V @ 2A		697011



Chassis Mounting Transformers

230V Single Primary



Notes:

International Sales Offices:



AUSTRALIA – Farnell InOne
Tel No: ++ 61 2 9645 8888
Fax No: ++ 61 2 9644 7898



FINLAND – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



NETHERLANDS – Farnell InOne
Tel No: ++ 31 30 241 7373
Fax No: ++ 31 30 241 7333



SWITZERLAND – Farnell InOne
Tel No: ++ 41 1 204 64 64
Fax No: ++ 41 1 204 64 54



AUSTRIA – Farnell InOne
Tel No: ++ 43 662 2180 680
Fax No: ++ 43 662 2180 670



FRANCE – Farnell InOne
Tel No: ++ 33 474 68 99 99
Fax No: ++ 33 474 68 99 90



NEW ZEALAND – Farnell InOne
Tel No: ++ 64 9 357 0646
Fax No: ++ 64 9 357 0656



UK – Farnell InOne
Tel No: ++ 44 8701 200 200
Fax No: ++ 44 8701 200 201



BELGIUM – Farnell InOne
Tel No: ++ 32 3 475 2810
Fax No: ++ 32 3 227 3648



GERMANY – Farnell InOne
Tel No: ++ 49 89 61 39 39 39
Fax No: ++ 49 89 613 59 01



NORWAY – Farnell InOne
Tel No: ++ 45 44 53 66 66
Fax No: ++ 45 44 53 66 02



UK – BuckHickman InOne
++ 44 8450 510 150
++ 44 8450 510 130



BRAZIL – Farnell-Newark InOne
Tel No: ++ 55 11 4066 9400
Fax No: ++ 55 11 4066 9410



HONG KONG – Farnell-Newark InOne
Tel No: ++ 852 2268 9888
Fax No: ++ 852 2268 9899



PORTUGAL – Farnell InOne
Tel No: ++ 34 93 475 8804
Fax No: ++ 34 93 474 5288



UK – CPC
++ 44 8701 202 530
++ 44 8701 202 531



CHINA – Farnell-Newark InOne
Tel No: ++86 10 6238 5152
Fax No: ++86 10 6238 5022



IRELAND – Farnell InOne
Tel No: ++ 353 1 830 9277
Fax No: ++ 353 1 830 9016



SINGAPORE – Farnell-Newark InOne
Tel No: ++ 65 6788 0200
Fax No: ++ 65 6788 0300



EXPORT – Farnell InOne
Tel No: ++ 44 8701 200 208
Fax No: ++ 44 8701 200 209

For enquiries from all other markets



DENMARK – Farnell InOne
Tel No: ++ 45 44 53 66 44
Fax No: ++ 45 44 53 66 06



ITALY – Farnell InOne
Tel No: ++ 39 02 93 995 200
Fax No: ++ 39 02 93 995 300



SPAIN – Farnell InOne
Tel No: ++ 34 93 475 8805
Fax No: ++ 34 93 474 5107



ESTONIA – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



MALAYSIA – Farnell-Newark InOne
Tel No: ++ 60 3 7873 8000
Fax No: ++ 60 3 7873 7000



SWEDEN – Farnell InOne
Tel No: ++ 46 8 730 50 00
Fax No: ++ 46 8 83 52 62

<http://www.farnellinone.com>

<http://www.buckhickmaninone.com>

<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

