

AQUASHEAR COANDA - TYPE C-H

TYPE	RATED FLOW (L/S)	NET WEIGHT (KG)
C-1500-H	100	50
C-750-H	50	27

Screen Notes

- Screen and frame are of one-piece fully welded construction
- Standard screen aperture 1.0mm
- All mounting holes are Ø13mm
- Screen and frame made from 304 stainless steel unless otherwise specified

Installation Notes

- Use M10 or M12 stainless steel fixing bolts.
- Seal screen to wing wall using mastic, grout or silicone, as appropriate.
- Typical civil works shown for indication only – actual design is site specific.
- Use chamfers as shown to improve flow conditions.

Health & Safety

- Wear suitable PPE when handling or installing screens.
- Manual handling regulations apply.
- COSH applicable for anti-seize grease & sealing compounds.
- Ensure safe access to foot of screen for future maintenance.

ALL DIMENSIONS IN MM



B	16MAY11	DR	Modification to Foot & Height
A	02FEB11	DR	INITIAL ISSUE
REV	DATE	NAME	DESCRIPTION



DYFI ECO PARK – MACHYNALLTH – POWYS – SY20 8AX
WALES – UNITED KINGDOM
TEL: +44(0)1654 705000 FAX: +44(0)1654 703000
WEBSITE: www.dulus.org.uk

AQUASHEAR COANDA SCREENS

CLIENT GENERAL DRAWING



PROJECT

LOCATION

DRAWN BY	DR	CHECKED	—	DATE	02 FEB 11
MANUF DWG		SCALE	1:20		A3

TITLE TYPE C-H
INSTALLATION & DIMENSION DETAILS



DRAWING No.	AQS-010	REVISION	B
-------------	---------	----------	---

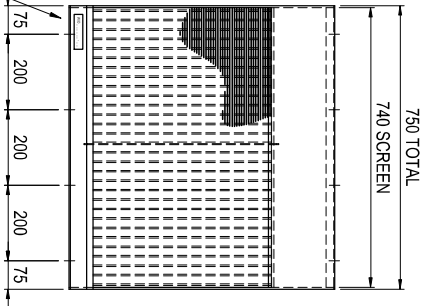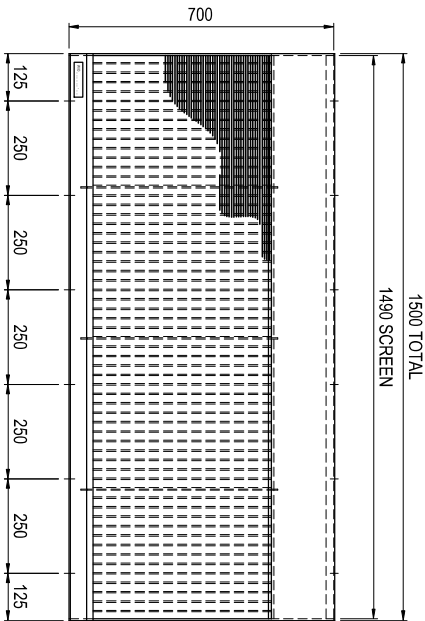


TYPE C-1500-H
(HALF HEIGHT FULL WIDTH)

TYPE C-750-H
(HALF HEIGHT HALF WIDTH)


IDENTIFICATION
STAMP ON FRAME

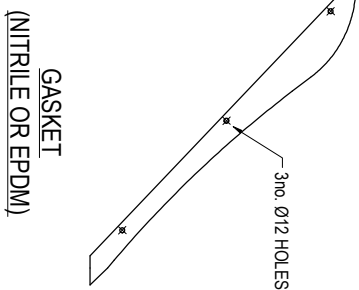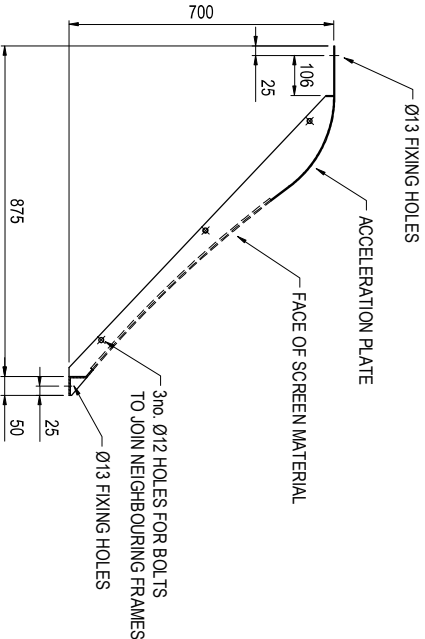

SCREEN SECTION

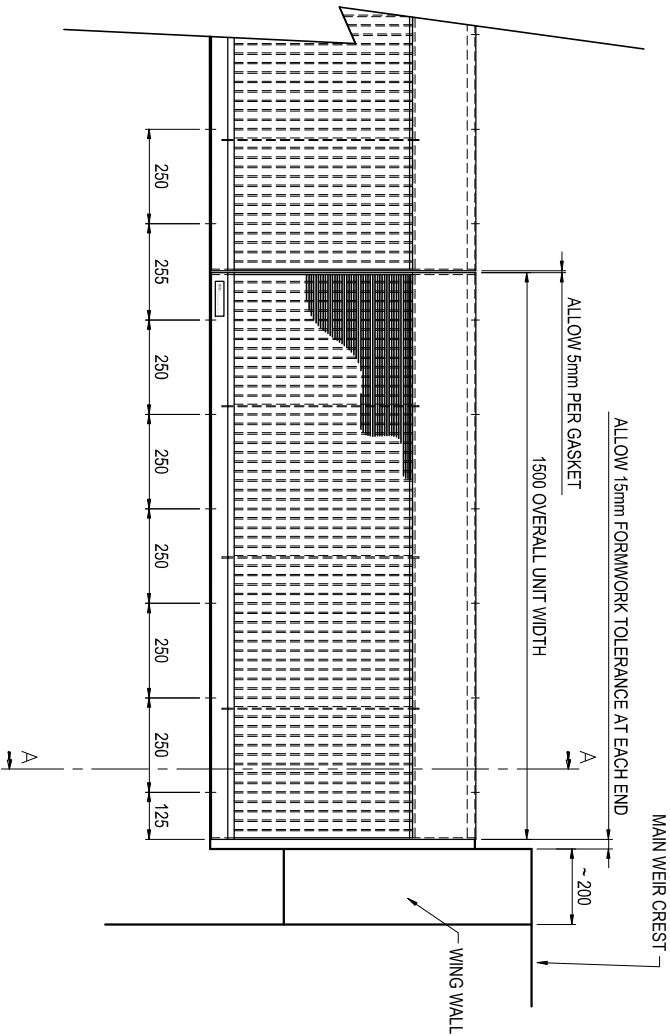

INSTALLED ELEVATION - MULTIPLE SCREENS
(LOOKING UPSTREAM)

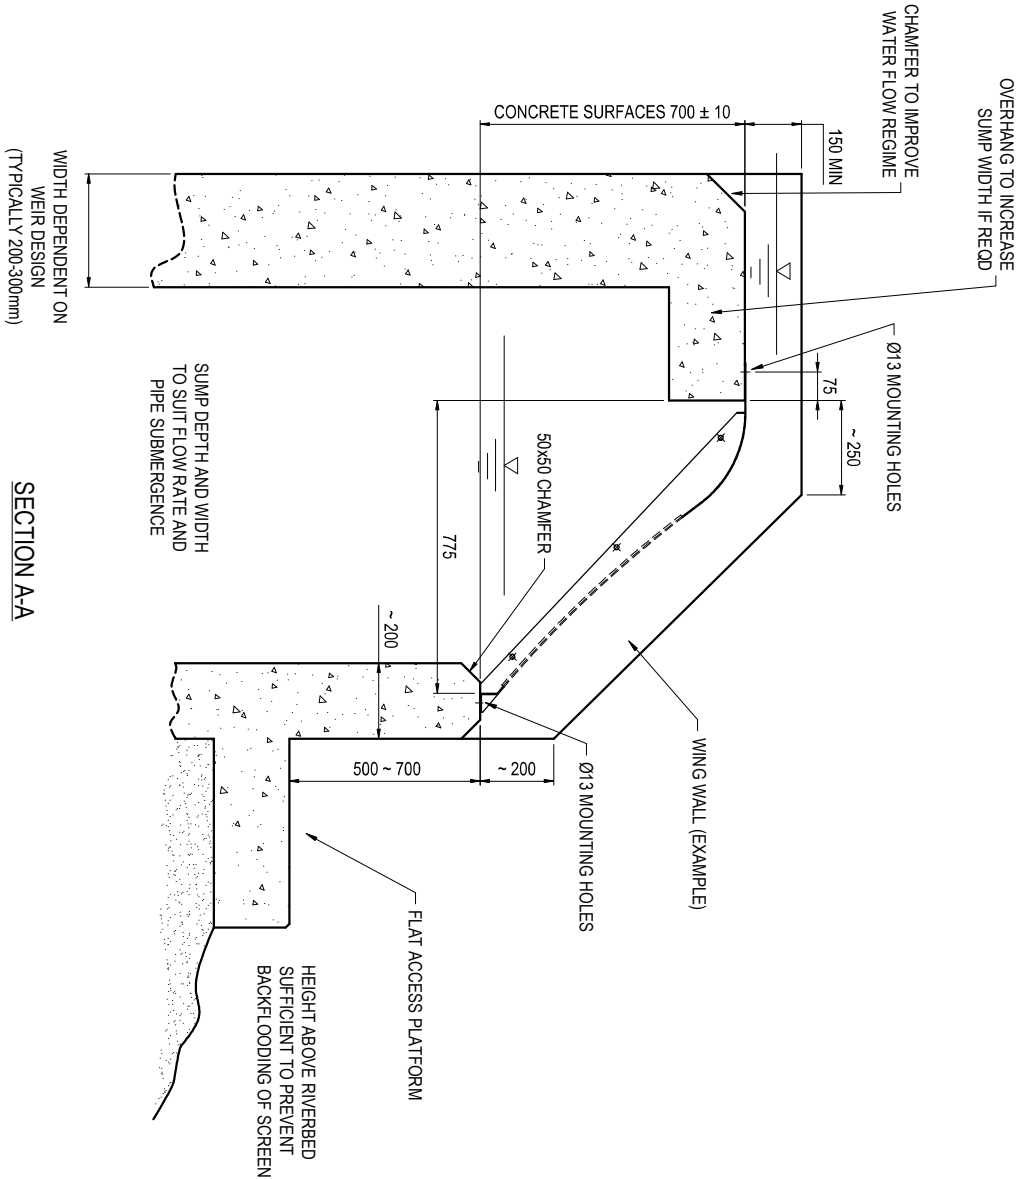

SECTION AA