

A Novel Densely Connected Convolutional Neural Network for Sea State Estimation Using Ship Motion Data

Xu Cheng, *Student Member, IEEE*, Guoyuan Li, *Senior Member, IEEE*, André Listou Ellefsen, Shengyong Chen, *Senior Member, IEEE*, Hans Petter Hildre, and Houxiang Zhang, *Senior Member, IEEE*

Abstract—Sea state estimation is a fundamental problem in the development of autonomous ships. Traditional methods such as wave buoy, satellites, and wave radars are limited by locations, clouds and costs, respectively. Model-based methods are prone to incorrect estimations due to their high dependency on mathematical models of ships. As previous data-driven studies for sea state estimation only consider wave height and use the motion data from dynamic positioning vessels, this paper introduces a new, deep neural network (SSENET) to estimate sea state in light of both wave height and wave direction, and extends the generality of sensor data from ship motion with forward speed. SSENET is built on the basis of stacked convolutional neural network blocks with dense connections between different blocks, channel attention modules and a feature attention module. The dense connections build short-cut paths between input and all subsequent convolutional blocks, which can make full use of all the hierarchical features from the original time series sensor data. The channel attention modules aim to enhance the features extracted by each convolution block. The feature attention module focuses on combining the feature fusion of hierarchical features in an adaptive manner. Benchmark experiments show the competitive performance against state-of-the-art approaches. Applying the SSENET on two datasets of zigzag motion for comparative studies shows the effectiveness of the proposed method.

Index Terms—Autonomous ships, densely connected CNN, sea state estimation, ship intelligence, time series classification.

I. INTRODUCTION

SHIP intelligence aims to make the marine and offshore industries more efficient, innovative, and adaptable to future operations. In fact, ship intelligence has been listed as an important part of the digital agenda, one of the pillars of the European growth strategy [1]. In recent years, interest in development and employment of autonomous ships has increased. Autonomous ships use intelligence to make decisions that increase the control precision, lower the fuel consumption, and extend the operational window [2]. Autonomous ships face greater challenges than autonomous cars, mainly because of the more complicated environment at sea. Wind and waves are the most vexing aspects of this environment. Therefore,

it is significant to develop a real-time and reliable method to estimate the sea state to aid on-board decisions.

Traditional technologies to estimate the sea state usually include manual observations, wave buoys, X-band wave radar, and meteorological remote sensing satellites or weather forecasts [3]. The advantage of manual observations is that the data has high persistence and does not depend on external sensors. However, manual observations themselves can be very subjective. The advantage of the wave buoy is that the observation data is highly reliable and comparable. Nevertheless, its shortcomings include weak ability to resist wind and waves, human installation and placement, and wide application in close coast. The cost of X-band wave radar is usually high and requires regular calibration and maintenance; meteorological remote sensing satellites are very susceptible to clouds; and the weather forecast is often subjected to a time delay of several hours.

In recent years, in order to overcome the shortcomings of traditional sea state estimation technologies, several researchers have made extensive explorations on the identification of environmental conditions based on onboard measurements [4]. A ship can be considered as a large wave buoy, and hence, it is essentially equipped with an environmental conditions estimation system [5]. The use of ship motion data to identify sea states usually involves model-based and model-free methods. The model-based methods are mainly designed to utilize domain knowledge to establish a mathematical model of ship motions [6]. However, the drawback of these method is that because they rely on mathematical models and corresponding assumptions, they are prone to incorrect identifications due to the randomness of waves. The model-free methods, on the other hand, are employing conventional machine learning or deep learning techniques to extract temporal and frequency features. The advantage of these techniques is that they do not depend on prior domain knowledge and they are easier to generalize. In other words, they can be applied to several vessels. Nevertheless, to the best of our knowledge, the previous model-free methods only considered the onboard measurement of dynamic positioning (DP) motion and only considered the height of the waves without considering the direction of the waves [3], [7].

DP motion, used in [3], [7], represents a special kind of maneuvering, which involves maintaining a fixed location or performing a very slow tracking task [8]. The use of this special maneuvering to estimate sea state lacks generality

Corresponding author: Guoyuan Li, e-mail:guoyuan.li@ntnu.no.

Xu Cheng and Shengyong Chen are with the School of Computer Science and Technology, Tianjin University of Technology, Tianjin, 300384, China.

Xu Cheng, Guoyuan Li, André Listou Ellefsen, Hans Petter Hildre, and Houxiang Zhang are with the Department of Ocean Operations and Civil Engineering, Norwegian University of Science and Technology, Aalesund, 6009 Norway.

because most ships do not have a DP system, and those that do are generally moving forward when in operation. Meanwhile, wave direction is as important as wave height, which can be used as a control variable for vessels. Thus, it is necessary to estimate sea state, including wave height and direction using the measurements of general ship maneuvering. To the best of our knowledge, this paper is the first consideration of zigzag for sea state estimation. Being different from the DP system, which is installed only in some ships, zigzag is an element of the basic maneuverability of modern ships. Thus, the use of motion data of zigzag is more common and the trained model on this kind of motion data can be applied to more ships. There are several challenges to estimating the sea state using motion data of zigzag: First, it is necessary to select the proper variables for sea state estimation. Second, the environmental influence relative to the ship hull itself is changing even though the external environment comes from a single direction. For the DP vessels which are maintaining a fixed position, the influence of wave is static, which makes it harder to learn the environmental information purely based on the data of zigzag motion than with DP motion. Third, the sensor data of ship motion in different sea state might be very similar, which makes it very hard to determine the sea state from current motion data alone. Considering both wave height and direction makes this even more difficult.

In order to be able to utilize the sensor data of ship motion for sea state estimation in light of both wave height and wave direction, it is necessary to extract fine-grained features. The most common solution, which employs deep learning techniques, is to use stacked convolutional neural networks (CNNs) sequentially to produce hierarchical representations. The convolutional operation can be viewed in order to extract features over the time series sequence [9]. However, conventional connections alone cannot deal with sea states properly. Inspired by [10], we propose a densely connected CNN (SSENET) with two attention mechanisms for sea state estimation. Through the dense connections, the SSENET can fully make use of all the hierarchical features from original time series sensor data and all the features extracted by all convolutional blocks. The channel attention mechanism is adopted to enhance the features extracted by each convolutional block [11]. To fuse and select task-friendly features, a feature attention module is designed before the classification layer. The two characteristics enable the proposed network to obtain competitive results on benchmark datasets and ship motion datasets.

In summary, the contributions of this paper include:

- 1) A new deep neural network (SSENET) is proposed that is equipped with dense connections between convolutional blocks and with two feature attention mechanisms. Through these two design considerations, the network is able to select hierarchical features for sea state estimation that reflect both wave height and wave direction adaptively using the measurement of zigzag motion.
- 2) The network is extensively evaluated on 12 benchmark datasets and two ship motion datasets. The network obtains competitive performance compared with state-of-the-art baseline models and other attention mechanisms on these datasets.

The rest of this paper is organized as follows. Section II is a brief review of previous work, mainly including the introduction of sea state estimation and time series classification. Section III introduces the architecture of the proposed model. The proposed method is examined on both benchmark data sets and ship motion data sets in Section IV. Section V presents the conclusion and discussion.

II. RELATED WORK

A. Onboard Measurements Based Sea State Estimation

Sea state estimation based on ship motion data slowly emerged from the 1970s [12]. Onboard measurements based on sea state estimation usually falls into two categories: model-based approaches and data-driven approaches. Model-based approaches deduce the information of the sea state by the combination of wave-induced measurements and a mathematical model [6]. Most of the work on the model-based approaches addresses the frequency domain and/or the time domain. In the analysis of the frequency domain, the response spectrum of ship motion is combined with response amplitude operators (RAOs), which reveals how waves are transformed into ship response, so that the estimation of the wave spectrum is given [5], [13], [14], [15], [16], [17]. Unlike the analysis in frequency domain, the analysis of the time domain is formulating the estimation of sea state directly in the time domain. Pascoal and Soares [18] proposed a Kalman filter-based method which relies on the accurate RAOs for the estimation of wave height and wave direction in time domain only. Nielsen et al. [19] also compute sea state directly in the time domain based on measured response and corresponding theory regarding both wave height and direction. As stated in the literature, it is reasonable to expect this will provide a good estimation of the sea state [20]. However, such estimates depend on the reliability of the RAOs [6].

Data-driven approaches are employing machine learning or deep learning techniques to extract temporal and frequency features. Even though machine learning or deep learning techniques have been widely used in other areas, they have rarely been applied to sea state estimation. Tu et al. proposed a multi-layer classifier for sea state estimation in terms of wave height working on salient feature extracted from the time domain and frequency domain of the motion data of DP vessels [7]. Although this method does not rely on accurate mathematical models, it requires a lot of human involvement. To reduce the influence of artificial features, Cheng et al. proposed a deep learning based end-to-end model for sea state estimation using the DP motion data [3]. While data-driven approaches have had good results, these approaches have not considered wave direction. Moreover, past researches have used the data of DP motion when the ship keeps a certain location. The use of DP motion data for sea state estimation is limited because ships are in motion most of the time. Therefore, it is necessary to propose an approach that accounts for ship motion.

B. Time Series Classification

In the literature, several algorithms have been developed over the years for time series classification. Most include

distance-based methods, feature-based methods, and deep-learning-based methods. The distance-based methods have proven successful in classifying multivariate time series data [21]. The feature-based methods heavily depend on the extracted features that represent the local or global patterns of time series. Baydogan et al. proposed a bag-of-features framework (TSBF) which can extract the interval features with different time scales [22]. Schafer proposed the BOSS (Bag-of-SFA-Symbols) model which combines symbolic fourier approximation (SFA) and word bag model [23], [24]. The hidden state conditional random field and hidden unit logic model are both successful feature-based methods, which produce state of the art results when used on different benchmark datasets [25]. Significant effort has been made to exploit approaches based on deep learning as a way to overcome the limitations of feature engineering. Zheng et al. proposed a multi-channel model for multi-variate time series classification [26]. Wang et al. proposed several baseline models for time series classification, such as the Fully Convolutional Network (FCN) and the Residual Neural Network (ResNet) [9]. Fazle et al. proposed the LSTM-FCN, ALSTM-FCN, MLSTM-FCN, AMLSTM-FCN models, which they combined with CNN and RNN to establish an end-to-end model [27], [28]. Fawaz et al. who provided an overview of most deep learning approaches for time series classification found that the ResNet [9], which adds an identity skip connection to bypass the nonlinear transformations, obtains the best results regardless of the size of the dataset [29].

III. DENSELY CONNECTED CONVOLUTIONAL NETWORKS FOR SEA STATE ESTIMATION

A. New Concept of Sea State

TABLE I
CODE OF SEA STATE [30]

Sea State	Description	Wave height (m)	World wide probability (%)
0	Calm (glassy)	0	—
1	Calm (ripples)	0-0.1	11.2486
2	Smooth	0.1-0.5	—
3	Slight	0.5-1.25	31.6851
4	Moderate	1.25-2.5	40.1944
5	Rough	2.5-4.0	12.8005
6	Very rough	4.0-6.0	3.0253
7	High	6.0-9.0	0.9263
8	Very High	9.0-14.0	0.1190
9	Extreme	> 14.0	0.0009

Sea state is the general condition of wave and wind on the open sea at a certain location and moment [30]. Most researches generally define the world-wide sea state by wave height, as shown in TABLE I. Data-driven approaches often label the sea state based on TABLE I [3], [7]. However, this labeling approach ignores the information of wave direction. This paper considers both wave height and direction for the following reasons: First, in marine operations, heading waves need to be used to reduce the sloshing caused by the waves. In

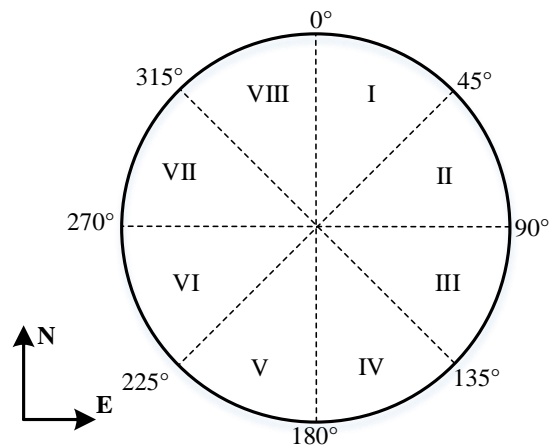


Fig. 1. Definition of the wave direction in world coordinate.

order to make better use of heading waves, we need to know the direction of the waves as much as possible to facilitate decision making. Second, the wave height and direction are two very important parameters for wave spectrum. Only wave height is focused on by the previous data-driven studies. Thus, this paper is the first attempt to estimate the wave direction based on deep learning techniques in addition to the wave height. As described in Fig. 1, the open sea is divided into eight parts. And the first six sea states are used, as described in TABLE I. The reason for using the six sea states is that the sum of the first six sea states is almost 96%. The first two sea states are very similar, and hence, are merged. Therefore, there are 5 wave heights coming from 8 directions, that is, 40 different new sea states are created for the new concept of the sea state.

Here, the motion data of zigzag will be used for sea state estimation. It is easy to estimate wave height alone. However, estimating both wave height and direction simultaneously is difficult. To illustrate this problems, we take one of the onboard measurements to explain why the estimation of both wave height and direction is challenging, as shown in Fig. 2 and Fig. 3. Fig. 2 shows the changes of heave velocity in five different wave heights, while Fig. 3 represents the variations under the same wave heights ($H_s=0.1\text{m}$) but in different wave directions in zigzag motion. As these two figures show, it is easy to observe the distinctive feature when considering wave height alone. However, when the wave direction is significantly different and the wave height is the same, phase shifts are small. In particular, the phase shift is smaller when the wave direction is almost the same. Thus, the designed network should be equipped with powerful capability to represent fine-grained features.

B. Network Structure

Inspired by the powerful capability of feature extraction of ResNet, we think it is possible to improve the performance of ResNet by adopting the idea of dense CNN [10]. The proposed network is mainly used for sea state estimation (which is why it is named SSENET), which takes advantage of the structure of ResNet in time series classification and ensures

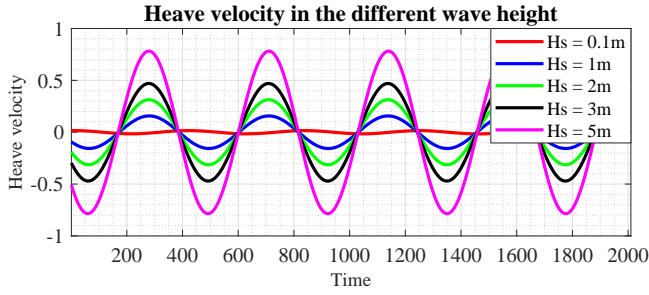


Fig. 2. Heave velocity in different wave height.

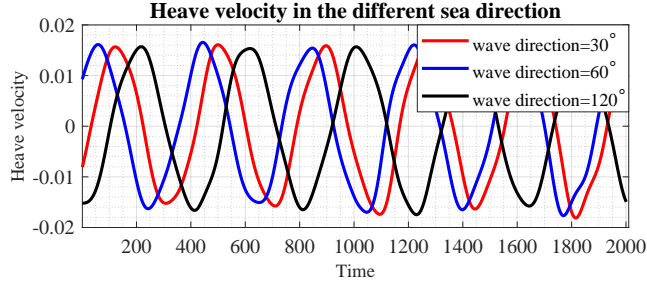


Fig. 3. Heave velocity in different wave direction.

maximum information flow between layers. The proposed SSENET consists of four parts that are depicted in Fig. 4: data processing, convolutional blocks and dense connections, channel attention, and feature attention. For the sake of simplicity, we only show three convolutional blocks. The model begins with the processed ship motion data and generates hierarchical features by convolution blocks and through dense connections (denoted by the colored lines). The dense connections enable SSENET to form hierarchical features flexibly, because each block receives additional input from all preceding blocks and passes its own feature maps to all subsequent blocks. To select task-friendly features, two attention mechanisms are presented to re-weigh these hierarchical feature maps. A final representation is then built for sea state classification.

C. Data Processing

With the development of vessels, all kinds of onboard measurements could be collected. In this paper, we only consider the onboard 9-DOF (degree-of-freedom) measurements (surge velocity, sway velocity, heave velocity, roll angle, roll velocity, pitch angle, pitch velocity, yaw angle, and yaw velocity), which can be obtained from the inertial measurement unit (IMU), as initial input. The data processing mainly focus on data cleaning, phase correction, and feature selection. It is necessary to clean the noise and redundant information to minimize its effect on further analysis and modeling [31]. To get rid of the noise, median filtering methods are employed in this paper. For the roll angel, yaw angel, and pitch angle, the physical definition creates some jumping phenomena. The algorithm developed in our previous paper is utilized [31]. A mutual information [32] based feature selection method is employed to select the most influential sensor data to sea state.

D. Convolutional Block and Dense Connection

The convolutional block consists of three basic 1D CNNs and three channel attention blocks, as depicted by C-Attention in Fig. 4. The activation function is the ReLU [33] for each basic 1D CNN, and the feature extracted by CNN will be processed by a batch normalization (BN) [34] layer. The convolution operation is done by the kernel with the preset size.

The 1D CNN operation is:

$$\begin{aligned} s &= W \otimes X + b \\ s &= BN(s) \\ s &= ReLU(s) \end{aligned} \quad (1)$$

where X represents the input, W and b stand for the trainable weights and bias respectively, and \otimes is convolution operator. After 1D CNN operation, the feature maps are enhanced by channel attention. Assuming the function of channel attention module is $C_l(\cdot)$, the output can be represented by $y = C_l(s)$. The final convolutional block is built by stacking three 1D CNNs and channel attention modules with the preset filter sizes.

Each block can receive the feature maps from all preceding blocks:

$$X_l = F_l(W, [x_0, x_1, \dots, x_{l-1}]) \quad (2)$$

where $[x_0, x_1, \dots, x_{l-1}]$ is the concatenation of the feature extracted in blocks $0, \dots, l-1$. W is the learnable parameter. $F_l(\cdot)$ is the composite function of each block.

E. Channel Attention Module

Channel attention, which is defined in [11], is utilized to exploit the latent relationship of features in channels. The design of this module is focusing on the meaningful part of a given input image. We adopt the idea of channel attention for time series classification. There are two channel features, C_{avg} and C_{max} , which utilize global average pooling and global max pooling, respectively. As described in [11], both C_{avg} and C_{max} can gather more vital information than each of them separately. It is better to use both of them to infer channel-wise features. Both features are forwarded to a shared one hidden layer multilayer perceptron (MLP) to produce the feature map. After the shared MLP, the feature vector is obtained by the element summation. Finally, the final weighted input can be computed using the sigmoid transformation. The whole process for channel attention module is shown in Fig. 5.

In short, the weights of channel attention and weighted inputs are computed as:

$$\begin{aligned} \alpha_{C_{att}} &= Sigmoid(\mathbf{MLP}(C_{avg}) + \mathbf{MLP}(C_{max})) \\ X_{weighted} &= \alpha_{C_{att}} \otimes \mathbf{X}. \end{aligned} \quad (3)$$

where X is the original input, \otimes means the element-wise multiply, and C_{avg} and C_{max} share the weights of \mathbf{MLP} . The re-weighted features will be sent to the next and all subsequent 1D CNNs.

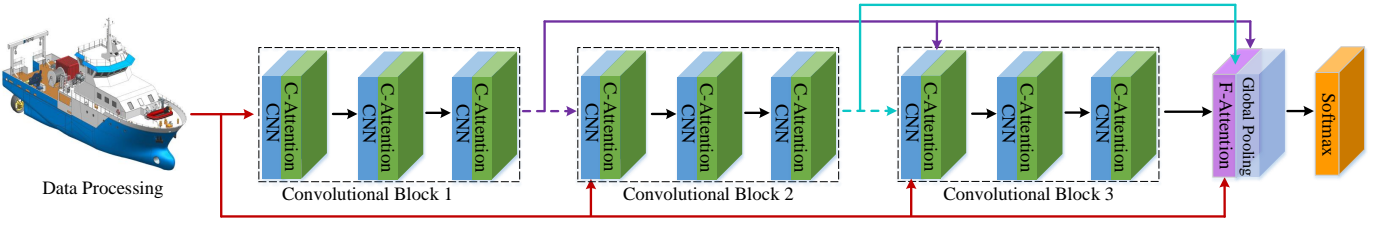


Fig. 4. Illustration of the proposed SSENET.

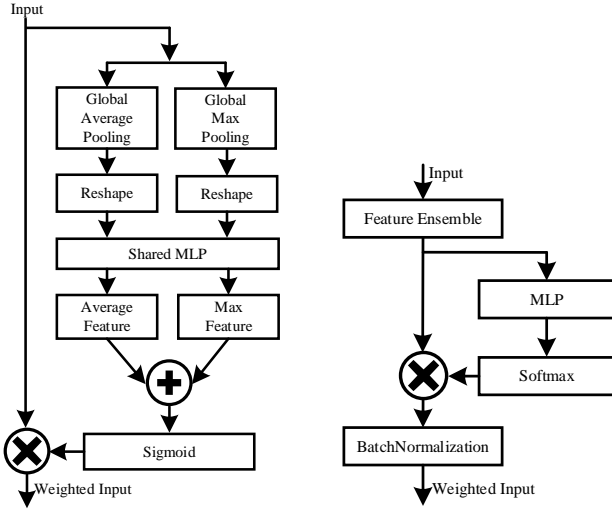


Fig. 5. Channel attention module. Fig. 6. Feature attention module.

F. Feature Attention Module

Through dense connections, the downstream layers of the network can access the features generated by the upstream layer. However, how to utilize these features (some are redundant) effectively remains a key issue. Therefore, we propose a feature attention mechanism to effectively make use of these features for classification. The feature attention module includes two operations: feature ensemble and feature weight, which is depicted in Fig. 6. It is noteworthy that those parts except feature ensemble are called feature weight. The feature ensemble is designed to recombine the features from different convolutional blocks. These new features are employed as the input to generate attention weights to re-weight the features adaptively. The whole processing will be realized during the training processing.

Assuming that the feature from different convolutional blocks are $\mathbf{X}_1, \mathbf{X}_2, \dots, \mathbf{X}_L$, the new feature can be represented as $X_{ensemble} = [\mathbf{X}_1; \mathbf{X}_2; \dots; \mathbf{X}_L]$.

The attention weight α and the weighted inputs can be computed as follows:

$$\begin{aligned} \alpha &= \text{softmax}(\text{MLP}(X_{ensemble})) \\ X_{weighted} &= \alpha \otimes X_{ensemble}. \end{aligned} \quad (4)$$

After the attention calculation, the weighted input will be fed into a softmax classification layer that corresponds to 40 sea states.

IV. EXPERIMENT

All experiments were performed on a server equipped with an Intel Xeon processor, 128 GB RAM and Nvidia Tesla K80 and 24 GB RAM. The software environment used is Anaconda¹ Python 3.6, and all the layers are implemented by Keras 2², using TensorFlow³ as the backend.

A. Dataset

- **Benchmark data set:** The proposed SSENET is evaluated on 12 public datasets which are used for multivariate time series classification [28]. The detailed information of the 12 public datasets are shown in TABLE II. These datasets contain several domains, and the number of classes and the number of variables differ greatly. Moreover, these datasets have been pre-processed and split in training and testing datasets. Instead of re-running other methods on these datasets, we just duplicated the results from four state-of-the-art methods [27], [28] reported by their respective authors in their publications to ensure a fair comparison.

TABLE II
INFORMATION OF BENCHMARK DATASETS

Datasets	Classes	Variables	Length	Domain	Train/Test
AREM	7	7	480	Activity Recognition	50%/50%
HAR	6	9	128	Activity Recognition	71%/29%
Daily Sport	19	45	125	Activity Recognition	50%/50%
Gesture Phase	5	18	214	Gesture Recognition	50%/50%
EEG	2	13	117	EEG Recognition	50%/50%
EEG2	2	64	256	EEG Recognition	20%/80%
HT Sensor	2	11	5396	Food Recognition	50%/50%
Movement AAL	2	4	119	Movement Recognition	50%/50%
Occupancy	2	5	3758	Occupancy Recognition	35%/65%
Ozone	2	72	291	Weather Recognition	50%/50%
Action 3d	20	570	100	Activity Recognition	50%/50%
Activity	16	570	337	Activity Recognition	50%/50%

¹<https://anaconda.org/>

²<https://keras.io>

³<https://www.tensorflow.org/>

- **Ship motion data set:** Two datasets of zigzag motion are collected from the digital ship of NTNU’s research vessel, R/V Gunnerus [35]. The reasons to collect two data sets are to eliminate the influence of the specific dataset and to study the performance of SSENET in different datasets. The difference of simulation setting for the two datasets comes from the wave directions and peak-to-peak period. The first data set, with peak-to-peak period 10s, contains the following wave directions: 30°, 60°, 120°, 150°, 210°, 250°, 300°, and 330°. The second one, with peak-to-peak period 15s, includes: 20°, 50°, 110°, 160°, 200°, 240°, 280°, and 350°. It is also noteworthy that the same zigzag command would be executed in the 40 sea states. The two datasets are split by 80%-20% for training and testing.

B. Benchmark Comparison

To illustrate the feasibility of our proposed model, we first compare our model with the state-of-art methods. In these tests, the number of convolutional blocks is set to 2. In this paper, we adopt the idea of setting the number of filters in FCN [27]. Those hyper-parameters also can be optimized by the parameter tuning algorithms [36]. The numbers of filters in the first block are 128, 256, and 128, while the numbers of filters in the second block are 256, 512, and 256. The kernel sizes in the two blocks are 8, 5, and 3. All the networks in this section are trained in two steps. They are trained initially using the Adam optimizer [37]. The initial and final learning rate are set to 1e-3 and 1e-4, respectively. And the learning rate changes every 50 epochs using a factor of $\frac{1}{\sqrt{2}}$. The mini-batch is set to 128 in the first step training. The second step is to perform fine-tuning of the network trained in the first step on the whole original data set. The fine-tuning process is repeated 5 times. The mini-batch and learning rate are firstly set to 32 and 1e-3, and then reduced by half at the end of each iteration.

To verify the performance of the proposed model and the training algorithm, the testing results of the proposed model with and without fine-tuning are provided, as shown in Table III. From the results without fine-tuning, it is observed that there is 3.01% improvement on EEG2, 2.76% on Gesture Phase, 0.17% on HAR, 4.9% on Occupancy, and 14.83% on Action 3d. It is interesting that our model can achieve better results on datasets which consist of a testing set bigger than the training set. This means that our model can extract more features with the help of its deep and flexible architecture. From the results with fine-tuning, SSENET achieves the highest average accuracy and wins on most of the benchmark datasets. Our network is able to achieve good results on most datasets. Specifically, our network obtained almost 14.82% improvement in Action 3d, 7% in EEG2, and 5.1% in AREM. Compared the result with and without model fine-tuning, the fine-tune is very helpful on some datasets, such as AREM with 7.9% improvement, EEG with 11.9%, EEG2 with 4.2%, Gesture Phase with 0.92%, HAR with 0.84%, HT Sensor with 9.5%, Ozone with 4.8%, and Action 3d with 1.87%. The other datasets got the same result whether the fine-tuning is

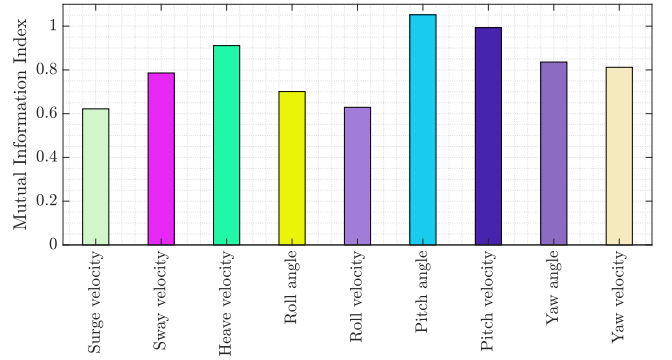


Fig. 7. Results of mutual information.

performed or not. From the benchmark tests we also can know that the SSENET can be applied to several tasks in different domains.

C. Data Analysis and Feature Selection

In the literature, only a few parameters would be used for sea state estimation both in model-based methods and model-free methods. In [7], surge velocity, sway velocity, roll angle and yaw angle are selected. In [4], [5], heave velocity, roll, and pitch angle are chosen. In [20], heave velocity, pitch angle, roll angle, and sway velocity are utilized. While in [16], sway velocity, heave velocity, pitch angle and yaw angle are employed. In conventional model-based methods, these variables are selected because they are wave-induced responses which can be inferred from the mathematical models. In this paper, we use a mutual information based variable selection method to explain why these variables are important from a data perspective. The input parameters are the 9-DOF onboard measurements, and the 40 classes are the output. From Fig. 7, we can know obviously that the heave velocity, pitch angle, pitch velocity, and yaw angle are the first four most important variables to sea state. In order to keep the same number of variables with other sea state methods, four variables are chosen as the input of our proposed model SSENET.

D. Baseline Comparison

We compare our model with six baselines as follows:

- **MLP:** Three stacked fully-connected layers are used in MLP, with 500 neurons in each layer and the ReLU used as the activation function. The dropout layer with dropping rate of 0.8 is utilized between layers [38].
- **CNN:** Two 1D convolutional layers are employed with the sigmoid activation function and average pooling is used between layers. We choose the best network for comparison from four different sets of filters {64, 128, 256, 512}.
- **FCN:** The FCN has the same settings as in MLSTM-FCN [28].
- **MLSTM-FCN:** The same settings as for MLSTM-FCN are adopted from [28].
- **LSTM:** Five different LSTMs are trained with different numbers of hidden units {8, 16, 32, 64, 128}.

TABLE III
ACCURACY COMPARISON WITH THE STATE-OF-ART TIME SERIES CLASSIFICATION METHODS (%)

Datasets	LSTM-FCN[27]	MLSTM-FCN[28]	ALSTM-FCN[27]	MALSTM-FCN[28]	Other methods [28]	SSENET	SSENET(FT)*
AREM	89.74	92.31	82.05	92.31	76.92 [DTW]	89.74	97.44
Daily Sport	99.65	99.65	99.63	99.72	98.42 [DTW]	99.61	99.61
EEG	60.94	65.63	64.06	64.07	62.5 [RF]	57.81	65.63
EEG2	90.67	91	90.67	91.33	77.5 [RF]	94.17	98.33
Gesture Phase	50.51	53.53	52.53	53.05	40.91 [DTW]	55.05	55.56
HAR	96	96.71	95.49	96.71	81.57 [RF]	96.87	97.69
HT Sensor	68	78	72	80	72 [DTW]	76	84
Movement AAL	73.25	79.63	70.06	78.34	65.61 [SVM-Poly]	77.71	77.71
Occupancy	71.05	76.31	71.05	72.37	67.11 [DTW]	80.26	80.26
Ozone	67.63	81.5	79.19	79.78	75.14 [DTW]	79.77	83.82
Action 3d	71.72	75.42	72.73	74.74	70.71 [DTW]	88.55	90.24
Activity	53.13	61.88	55.63	58.75	66.25 [DTW]	65.00	65.63
Accuracy	74.36	79.30	75.42	78.43	71.22	80.05	82.99
No. of wins	0	2	0	1	1	1	9
Ranking	5	2	4	3	—	—	1

* FT means the models have been fine-tuned.

- **ResNet:** We use the same settings as in ResNet from [29].
- **SeaStateNet:** SeaStateNet is specifically designed for sea state estimation [3]. SeaStateNet is composed of three parallel parts: LSTM part, CNN part, and FFT part.

In this section, the hyper-parameters of SSENET are the same as in Section IV-B, but it is trained without fine-tuning. The settings of hyper-parameters and training algorithm for SSENET for all the following experiments are the same as in this section, and will not be further elaborated. The proposed SSENET is compared with the baseline methods on the two ship motion datasets. To fully test our model, we present the best performance of each method in TABLE IV. Among these methods, CNN, FCN, ResNet, and SSENET are pure convolutional neural networks. LSTM-FCN and SeaStateNet belong to different combinations of neural networks. LSTM-FCN consists of two parts: LSTM and FCN which work parallelly, and SeaStateNet is composed of three parts: LSTM part, CNN part, and FFT part, which also work parallelly. In term of accuracy, our proposed network clearly outperforms all the baseline methods on both datasets. The worst performance occurs in MLP, and the performance of LSTM is relatively better with the capability of learning the periodic features. SSENET shows 10.50% and 9.67% improvement compared to the SeaStateNet on dataset 1 and dataset 2, and 19.4% and 15.7% improvement compared to the MLSTM-FCN on both datasets. From the results, we can also see that the SeaStateNet is better than MLSTM-FCN. The reason might be that the SeaStateNet has one more FFT part which can extract features in the frequency domain. For these pure convolution neural network, ResNet performs better than CNN and FCN, which reveals the advantage of its complex structure to extract features from this kind of ship motion data. Compared to ResNet, the SSENET shows 12.85% and 13.37% improvement on the dataset 1 and dataset 2. The reasonable explanation could be that the proposed SSENET is based on the ResNet with additional dense connection and attention modules, which can improve the performance significantly.

TABLE IV
ACCURACY COMPARISON WITH BASELINES ON SHIP MOTION DATA

Methods	Type	dataset 1	dataset 2	average
MLP [38]	Simple NN	75%	77.12%	76.06%
LSTM	Simple NN	75%	79.81%	77.41%
CNN	Pure CNN	75.58%	78.65%	77.12%
FCN [28]	Pure CNN	75.38%	81.35%	78.37%
ResNet [29]	Pure CNN	78.27%	80.96%	79.62%
MLSTM-FCN [28]	Combined NN	75.19%	80.77%	77.98%
SeaStateNet [3]	Combined NN	80.38%	84.42%	82.40%
SSENET	Pure CNN	89.81%	93.46%	91.64%

E. Ablation Study

To conduct the ablation study, four variants are compared.

- **SSENET-Attention:** The two attentions mechanisms: C-Attention and F-Attention as shown in Fig.4 are removed.
- **SSENET-C-Attention:** There is no C-Attention in SSENET.
- **SSENET-F-Attention:** To validate the F-Attention mechanism, we remove it from SSENET directly.
- **SSENET-Connection:** This variant is constructed using the stacked convolutional blocks, that is, the variant does not consider the dense connections.

Each variant was tested on the two data sets. To present an equal measurement, we present the best performance of the four variants. From TABLE V, we observe that: 1) The biggest accuracy drop happens when there are no attention modules. 2) In terms of average accuracy, the accuracy drops by 4.33% when the C-Attention module is removed. However, the accuracy only drops by 2.31% when there is no F-Attention module. This means the C-Attention module is more important than the F-Attention module. 3) The full combination of the two attention modules show superiority against the variants SSENET-Attention (without attention modules), SSENET-C-Attention (C-Attention is removed) and SSENET-F-Attention (F-Attention is removed), which demonstrates the importance of the proposed two attention mechanisms.

To illustrate the importance of dense connections, we further

compare the network with and without the dense connections. As we can see from TABLE V, the accuracy drops by 1.93% and 2.88% in dataset 1 and dataset 2, respectively. In terms of average accuracy, the accuracy drops by 2.41%. From the results, the dense connection can improve the accuracy by considering the fusion of hierarchical features. Furthermore, despite of the usage of dense connection, the computational cost doesn't increase significantly.

TABLE V
ABLATION STUDY

Methods	dataset 1	dataset 2	average
SSENET-Attention	81.92%	86.15%	84.04%
SSENET-C-Attention	85.77%	88.85%	87.31%
SSENET-F-Attention	87.88%	90.77%	89.33%
SSENET-Connection	87.88%	90.58%	89.23%
SSENET	89.81%	93.46%	91.64%

F. Comparison with Other Attention Mechanisms

TABLE VI
COMPARISON STUDY OF ATTENTION MODULES

Methods	dataset 1	dataset 2	average
CBAM [11]	81.92%	82.69%	82.31%
Global_text [39]	85.77%	81.92%	83.85%
SE [40]	87.88%	83.27%	85.58%
SSENET	89.81%	93.46%	91.64%

To further verify the importance of the proposed attention mechanisms, the proposed network is compared with three attention mechanisms. As is shown in Fig. 4, the number pertaining to the C-Attention module is much greater than that pertaining to the F-Attention module. The C-Attention module is replaced by one attention module at each comparison. From TABLE VI, we observe that the SE obtained the best performance. It is noteworthy that the C-Attention module is one part of CBAM. The CBAM is applying the C-Attention module and the spatial attention module sequentially so that it can learn where to focus and on what in the channel and spatial axes [11]. While this paper only considers the idea of channel attention, it is interesting that CBAM is not as good as C-Attention, even though it is better than C-Attention in the original paper for computer vision applications. The reason may be that CBAM is good at extracting more influential features in the 3D image data than in 2D time series data. In the practice of SE, only the average-pooled features are exploited, missing the importance of max-pooled features which is verified by the experiment results.

G. Sensitivity Analysis of Network Structure

The sensitivity analysis of the network structure focuses on the influence of the number of convolutional blocks, and the number of 1D CNNs in each convolutional block. To study the influence of the number of convolutional blocks, three different networks are created. The first network contains one

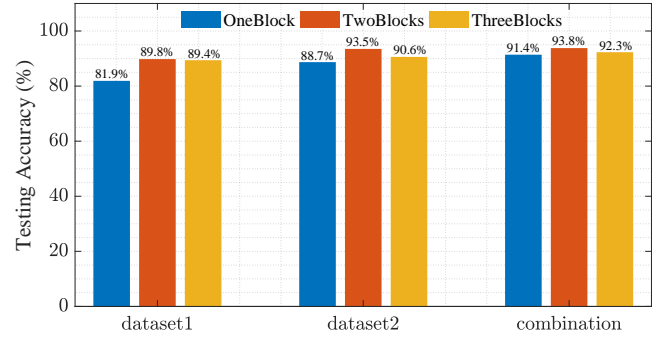


Fig. 8. Influence of the number of convolutional blocks.

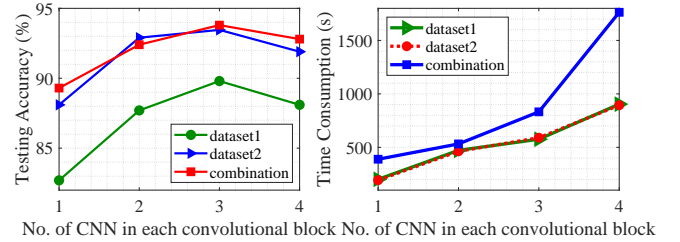


Fig. 9. Influence of the number of 1D CNNs in each convolutional blocks.

convolutional block as shown in Fig. 4, with the filter numbers $\{128, 256, 128\}$. The second network has two convolution blocks which is tested in previous experiments. The third network includes three convolutional blocks with the number of filters $\{128, 256, 128, 256, 512, 256, 128, 256, 128\}$. These networks are compared using three datasets: dataset 1 and dataset 2 as described above, and a third dataset that combines dataset 1 and dataset 2. The using of the third dataset makes it possible to train more parameters as the depth of the networks increases. We trained all the networks several times, and the networks with the best performance are chosen for comparison. Fig.8 represents the influence of the number of convolutional blocks. As we expect, the network just with one convolutional block has the worst performance, and the network containing two convolutional blocks obtains the best accuracy in the three data sets. Another finding is that the accuracy of the three networks in the dataset 1 and dataset 2 is consistent with the previous experiment. However, higher accuracy is obtained in the combination of the two data sets. The explanation is that the bigger data set can provide more information resulting in better accuracy.

To investigate the influence of the number of 1D CNNs in each convolutional block, four networks are established with one to four 1D CNNs, respectively. In this comparison, the number of convolutional block is set to 2. The corresponding settings for the numbers of filters in each 1D CNN are: $\{128\}$, $\{128, 256\}$, $\{128, 256, 128\}$, and $\{128, 256, 256, 128\}$. The other settings for hyper-parameters are the same as shown in Section IV-B. Those networks are also tested on the three datasets as mentioned above. Fig. 9 describes the influence of the numbers of 1D CNNs in each convolutional block. The left panel shows the validation accuracy in the three data sets, and the right panel represents the training time of the

four networks in the three data sets. It is obvious that the highest accuracy happens when there are three 1D CNNs, and the accuracy is almost the same when there are two and four 1D CNNs. Additionally, the training time increase significantly when there are four 1D CNNs. According to the above experiments, the best choice is to select three 1D CNNs considering both accuracy and consumed time.

V. DISCUSSION AND CONCLUSION

This paper introduces a new deep neural network to estimate sea state based on ship motion data of zigzag considering both wave height and direction. The network is built on the basis of stacked CNN blocks with dense connections between different blocks, channel attention modules and a feature attention module. The dense connections build short-cut paths between input and all subsequent convolutional blocks. The channel attention module aims to enhance the features extracted by each convolution block. The feature attention module focuses on the feature fusion of hierarchical features jointly and adaptively.

There are some interesting findings in this paper. One is that the proposed SSENET achieved different accuracy in dataset 1 and dataset 2, even though there is not very much difference between the two datasets. The reason why this occurred is that the distribution of the training set and the test set differs to somewhat when the two are split randomly from the original one. Superficially, the proposed SSENET is quite similar to ResNet. However, SSENET has concatenation instead of summation. From the experimental results, the seemingly small modification has resulted in different behaviors of the two networks. Thanks to the input concatenation, the feature extracted by any layers of SSENET can be accessible to by all subsequent layers. In this design, the features can be fully reused throughout the network and lead to a more network. Another possible explanation for the improved accuracy of the proposed SSENET is that the two attention modules may have enhanced the extracted features. However, the ablation study shows that it is still not easy to identify which attention module is more important, even though there are more accuracy drops when the channel attention module is removed. The reason is that there are more channel attention modules than feature modules.

Future research will employ more tests to determine the importance of each part of SSENET. Furthermore, the hyper-parameters should be optimized to find the best network structure. The third and most important point is that we need to integrate SSENET into a ship motion monitoring system to serve an autonomous ship.

ACKNOWLEDGMENT

This work was mainly supported by the project “Digital Twins for Vessel Life Cycle Service” (Project no.: 280703) and partly by the National Natural Science Foundation of China (U1509207). First author Xu Cheng is financially supported by the Chinese Scholarship Council.

REFERENCES

- [1] X. Cheng, G. Li, R. Skulstad, S. Chen, H. P. Hildre, and H. Zhang, “A neural-network-based sensitivity analysis approach for data-driven modeling of ship motion,” *IEEE Journal of Oceanic Engineering*, 2019.
- [2] R. Jalonen, R. Tuominen, and M. Wahlström, “Remote and autonomous ships - the next steps: Safety and security,” *Rolls-Royce, Buckingham Gate, London: The Advanced Autonomous Waterborne Applications (AAWA)*, pp. 56–73, 2016.
- [3] X. Cheng, G. Li, R. Skulstad, S. Chen, H. P. Hildre, and H. Zhang, “Modeling and analysis of motion data from dynamically positioned vessels for sea state estimation,” in *2019 International Conference on Robotics and Automation (ICRA)*. IEEE, 2019, pp. 6644–6650.
- [4] U. D. Nielsen, A. H. Brodtkorb, and A. J. Sørensen, “A brute-force spectral approach for wave estimation using measured vessel motions,” *Marine Structures*, vol. 60, pp. 101–121, 2018.
- [5] A. H. Brodtkorb, U. D. Nielsen, and A. J. Sørensen, “Sea state estimation using vessel response in dynamic positioning,” *Applied Ocean Research*, vol. 70, pp. 76–86, 2018.
- [6] U. D. Nielsen, “A concise account of techniques available for shipboard sea state estimation,” *Ocean Engineering*, vol. 129, pp. 352–362, 2017.
- [7] F. Tu, S. S. Ge, Y. S. Choo, and C. C. Hang, “Sea state identification based on vessel motion response learning via multi-layer classifiers,” *Ocean Engineering*, vol. 147, pp. 318–332, 2018.
- [8] A. J. Sørensen, “A survey of dynamic positioning control systems,” *Annual reviews in control*, vol. 35, no. 1, pp. 123–136, 2011.
- [9] Z. Wang, W. Yan, and T. Oates, “Time series classification from scratch with deep neural networks: A strong baseline,” in *2017 International joint conference on neural networks (IJCNN)*. IEEE, 2017, pp. 1578–1585.
- [10] G. Huang, Z. Liu, L. Van Der Maaten, and K. Q. Weinberger, “Densely connected convolutional networks,” in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2017, pp. 4700–4708.
- [11] S. Woo, J. Park, J.-Y. Lee, and I. So Kweon, “Cbam: Convolutional block attention module,” in *Proceedings of the European Conference on Computer Vision (ECCV)*, 2018, pp. 3–19.
- [12] K. Lindemann, J. Odland, and J. Strengeheagen, “On the application of hull surveillance systems for increased safety and improved structural utilization in rough weather,” 1977.
- [13] T. Iseki and K. Ohtsu, “Bayesian estimation of directional wave spectra based on ship motions,” *Control Engineering Practice*, vol. 8, no. 2, pp. 215–219, 2000.
- [14] U. D. Nielsen, “Estimations of on-site directional wave spectra from measured ship responses,” *Marine Structures*, vol. 19, no. 1, pp. 33–69, 2006.
- [15] R. Pascoal, C. G. Soares, and A. Sørensen, “Ocean wave spectral estimation using vessel wave frequency motions,” *Journal of Offshore Mechanics and Arctic Engineering*, vol. 129, no. 2, pp. 90–96, 2007.
- [16] R. Pascoal, L. P. Perera, and C. G. Soares, “Estimation of directional sea spectra from ship motions in sea trials,” *Ocean Engineering*, vol. 132, pp. 126–137, 2017.
- [17] U. D. Nielsen and A. H. Brodtkorb, “Ship motion-based wave estimation using a spectral residual-calculation,” in *2018 OCEANS-MTS/IEEE Kobe Techno-Oceans (OTO)*. IEEE, 2018, pp. 1–9.
- [18] R. Pascoal and C. G. Soares, “Kalman filtering of vessel motions for ocean wave directional spectrum estimation,” *Ocean Engineering*, vol. 36, no. 6-7, pp. 477–488, 2009.
- [19] U. D. Nielsen, R. Galeazzi, and A. H. Brodtkorb, “Evaluation of shipboard wave estimation techniques through model-scale experiments,” in *OCEANS 2016-Shanghai*. IEEE, 2016, pp. 1–8.
- [20] N. Montazeri, U. D. Nielsen, and J. J. Jensen, “Estimation of wind sea and swell using shipboard measurements—a refined parametric modelling approach,” *Applied Ocean Research*, vol. 54, pp. 73–86, 2016.
- [21] C. Orsenigo and C. Vercellis, “Combining discrete svm and fixed cardinality warping distances for multivariate time series classification,” *Pattern Recognition*, vol. 43, no. 11, pp. 3787–3794, 2010.
- [22] M. G. Baydogan, G. Runger, and E. Tuv, “A bag-of-features framework to classify time series,” *IEEE transactions on pattern analysis and machine intelligence*, vol. 35, no. 11, pp. 2796–2802, 2013.
- [23] P. Schäfer (2015), “The boss is concerned with time series classification in the presence of noise,” *Data Mining and Knowledge Discovery*, vol. 29, no. 6, pp. 1505–1530, 2015.
- [24] P. Schäfer (2016), “Scalable time series classification,” *Data Mining and Knowledge Discovery*, vol. 30, no. 5, pp. 1273–1298, 2016.
- [25] W. Pei, H. Dibeklioglu, D. M. Tax, and L. van der Maaten, “Multivariate time-series classification using the hidden-unit logistic model,” *IEEE*

transactions on neural networks and learning systems, vol. 29, no. 4, pp. 920–931, 2018.

- [26] Y. Zheng, Q. Liu, E. Chen, Y. Ge, and J. L. Zhao, “Exploiting multi-channels deep convolutional neural networks for multivariate time series classification,” *Frontiers of Computer Science*, vol. 10, no. 1, pp. 96–112, 2016.
- [27] F. Karim, S. Majumdar, H. Darabi, and S. Chen, “Lstm fully convolutional networks for time series classification,” *IEEE Access*, vol. 6, pp. 1662–1669, 2017.
- [28] F. Karim, S. Majumdar, H. Darabi, and S. Harford, “Multivariate lstm-fcns for time series classification,” *arXiv preprint arXiv:1801.04503*, 2018.
- [29] H. I. Fawaz, G. Forestier, J. Weber, L. Idoumghar, and P.-A. Muller, “Deep learning for time series classification: a review,” *Data Mining and Knowledge Discovery*, pp. 1–47, 2019.
- [30] T. I. Fossen, *Handbook of marine craft hydrodynamics and motion control*. John Wiley & Sons, 2011.
- [31] G. Li, H. Zhang, B. Kawan, H. Wang, O. L. Osen, and A. Styve, “Analysis and modeling of sensor data for ship motion prediction,” in *OCEANS 2016-Shanghai*. IEEE, 2016, pp. 1–7.
- [32] J. R. Vergara and P. A. Estévez, “A review of feature selection methods based on mutual information,” *Neural computing and applications*, vol. 24, no. 1, pp. 175–186, 2014.
- [33] V. Nair and G. E. Hinton, “Rectified linear units improve restricted boltzmann machines,” in *Proceedings of the 27th international conference on machine learning (ICML-10)*, 2010, pp. 807–814.
- [34] S. Ioffe and C. Szegedy, “Batch normalization: Accelerating deep network training by reducing internal covariate shift,” *arXiv preprint arXiv:1502.03167*, 2015.
- [35] S. Skjong, M. Rindarøy, L. T. Kyllingstad, V. Æsøy, and E. Pedersen, “Virtual prototyping of maritime systems and operations: applications of distributed co-simulations,” *Journal of Marine Science and Technology*, vol. 23, no. 4, pp. 835–853, 2018.
- [36] H. Jin, Q. Song, and X. Hu, “Efficient neural architecture search with network morphism,” *arXiv preprint arXiv:1806.10282*, 2018.
- [37] D. P. Kingma and J. Ba, “Adam: A method for stochastic optimization,” *Computer Science*, 2014.
- [38] N. Srivastava, G. Hinton, A. Krizhevsky, I. Sutskever, and R. Salakhutdinov, “Dropout: a simple way to prevent neural networks from overfitting,” *The Journal of Machine Learning Research*, vol. 15, no. 1, pp. 1929–1958, 2014.
- [39] Y. Cao, J. Xu, S. Lin, F. Wei, and H. Hu, “Gnet: Non-local networks meet squeeze-excitation networks and beyond,” *arXiv preprint arXiv:1904.11492*, 2019.
- [40] J. Hu, L. Shen, and G. Sun, “Squeeze-and-excitation networks,” in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2018, pp. 7132–7141.




Xu Cheng received his Master degree in Computer Science and Technology from Zhejiang University of Technology, Hangzhou, China, in 2015. He is currently working at NTNU, Aalesund, Norway, as part of the Mechatronics Laboratory within the Department of Ocean Operations and Civil Engineering, as a Ph.D. candidate. His current research interests include sea state estimation, data analysis, neural network, ship motion modeling.



Guoyuan Li (M’14-SM’19) received the Ph.D. degree from the Institute of Technical Aspects of Multimodal Systems, Department of Informatics, University of Hamburg, Hamburg, Germany, in 2013. Since 2014, he has been with the Mechatronics Laboratory, Department of Ocean Operations and Civil Engineering, Norwegian University of Science and Technology, Aalesund, Norway. In 2018, he become an associate professor in ship intelligence. His research interests include path planning, ship motion prediction, maneuvering control, artificial intelligence, optimization algorithms, and locomotion control of bioinspired robots. In these areas, he has authored or coauthored more than 50 papers.



André Listou Ellefsen received the masters degree in subsea technology from the Norwegian University of Science and Technology (NTNU), Trondheim, Norway, in 2016. He is currently pursuing the Ph.D. degree with NTNU, Aalesund, Norway, as part of the Mechatronics Laboratory, Department of Ocean Operations and Civil Engineering. His current research interests include artificial intelligence, deep learning, decision support, predictive maintenance, and digital twins.



Shengyong Chen (SM’10) received the Ph.D. degree in computer vision from City University of Hong Kong, Hong Kong, in 2003. He is currently a Professor of Tianjin University of Technology. He received a fellowship from the Alexander von Humboldt Foundation of Germany and worked at University of Hamburg in 2006 - 2007. His research interests include computer vision, robotics, and image analysis. Dr. Chen is a Fellow of IET and senior member of IEEE and CCF. He has published over 100 scientific papers in international journals. He received the National Outstanding Youth Foundation Award of China in 2013.



Hans Petter Hildre is professor and head of the Department of Ocean Operations and Civil Engineering at the Norwegian University of Science and Technology (NTNU). His area of interest is product design and system architecture design. Hans Petter is Centre Director for Centre for Research Driven Innovation (SFI-MOVE) within marine operations. This is cooperation between NTNU, SINTEF, University Sao Paulo and 15 companies at the west coast of Norway. Professor Hildre is head of research in national program Global Centre of Expertise Blue Maritime, project leader in several research projects, member of the board in 5 companies, and has a number of patents.



Houxiang Zhang (M04-SM12) received Ph.D. degree in Mechanical and Electronic Engineering in 2003. From 2004, he worked as Postdoctoral Fellow at the Institute of Technical Aspects of Multimodal Systems (TAMS), Department of Informatics, Faculty of Mathematics, Informatics and Natural Sciences, University of Hamburg, Germany. In Feb. 2011, he finished the Habilitation on Informatics at University of Hamburg. Dr. Zhang joined the NTNU (before 2016, Aalesund University College), Norway in April 2011 where he is a Professor on Robotics and Cybernetics. The focus of his research lies on two areas. One is on biological robots and modular robotics. The second focus is on virtual prototyping and maritime mechatronics. In these areas, he has published over 130 journal and conference papers and book chapters as author or co-author.