

Allocation of water consumption in multipurpose reservoirs

Authors

Tor Haakon Bakken^{1&2} (corresponding author), Ingunn Saur Modahl³, Hanne Lerche Raadal³, Ana Adeva Bustos^{4,2&1} & Silje Arnøy³

¹ Norwegian University of Science and Technology (NTNU), Department of Hydraulic and Environmental Engineering. S.P. Andersens veg 5, N-7491 Trondheim, Norway. E-mail: tor.haakon.bakken@sintef.no. Tlf: +47 95156944

² SINTEF Energy Research, Sem Sælands vei 11, NO-7465 Trondheim, Norway

³ Ostfold Research, Stadion 4, 1671 Kråkerøy, Norway

⁴ Universidad Politécnica de Madrid, Departamento de Ingeniería Forestal, Escuela Técnica Superior de Ingenieros de Montes, 28040-Madrid, Spain

Abstract

The IPCC Special Report on Renewable Energy (IPCC, 2011) represented a benchmark in the assessment of water consumption from electricity production. The numbers on hydropower ranged from very low to much larger than the other renewable technologies, partly explained by methodological problems. One of the methodological shortcomings identified was the lack of guidance on how to allocate the water consumption rates in multipurpose reservoirs. This paper is, according to the authors' knowledge, the first attempt to evaluate, test and propose a methodology for the allocation of water consumption from such reservoirs. We tested four different allocation methods in four different cases, all serving 3-5 functions, including drinking water supply, irrigation, flood control, industrial water, ecological flow and power generation.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Based on our case studies we consider volume allocation to be the most robust approach for allocating water consumption between functions in multipurpose reservoirs. The spatial boundaries of the analysis should follow the boundaries of the hydraulic system. We recommend that data should preferably be gathered from one source for all functions, to ensure a consistent calculation approach. We believe the findings are relevant for similar allocation problems, such as allocation of energy investments and green-house gas emissions from multipurpose reservoirs.

Keywords: water consumption, allocation, multipurpose reservoirs, life cycle assessment (LCA)

1 Introduction

1
2
3 The IPCC Special Report on Renewable Energy Sources (IPCC, 2011) assessed the potential of renewable
4 energy sources to replace fossil-based sources. The renewable technologies were benchmarked with respect to a
5 set of criteria, including their typical cost ranges, their energy efficiency and the water needed to produce 1
6 MWh of electricity, i.e. ‘water consumption of electricity production’. The water consumption estimates on
7 hydropower were based on very few studies and publications, and presented an inconsistent picture as the
8 estimates ranged from close to 0 m³/MWh up to a maximum 209 m³/MWh. This was far beyond all other
9 technologies that ended up in the range of 1-5 m³/MWh (IPCC, 2011). Later studies on water consumption from
10 hydropower (e.g. Mekonnen & Hoekstra, 2012; Demeke *et al.*, 2013, Bakken *et al.*, 2013b) indicate that the
11 water consumption rates could go even far beyond the numbers published by IPCC (2011). A comprehensive
12 review and a discussion of the applied methodology (Bakken *et al.*, 2013b) reveals that these numbers are
13 calculated based on an immature and over-simplistic methodology or lacks clarity, which is also acknowledged
14 by other publications (e.g. Demeke *et al.*, 2013; IPCC, 2011; Mekonnen & Hoekstra, 2012, Meldrum *et al.*,
15 2013; Chenoweth *et al.*, 2014).

16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32 One of the main methodological shortcomings identified is the lack of guidance on how to allocate the water
33 consumption rates in multipurpose reservoirs (IPCC, 2011; Pfister *et al.*, 2011; Cooley *et al.*, 2011; Mekonnen &
34 Hoekstra 2012; Bakken *et al.*, 2013b; Demeke *et al.*, 2013; Fulton & Cooley, 2015). A multipurpose reservoir is
35 a reservoir that serves several purposes, such as flood control, drinking water supply, irrigation water,
36 hydropower production, recreation, water aquaculture and more (IPCC, 2011), whereas hydropower is one of the
37 functions in about 40 % of the multipurpose reservoirs (ICOLD, 2014). IPCC (2011, Chapter 5, page 44) states
38 that ‘allocation schemes for determining water consumption from various reservoir uses in the case of
39 multipurpose reservoirs can significantly influence reported water consumption values’. Furthermore, IPCC
40 (2011, Technical Summary, page 74) claims that ‘the multipurpose nature of most hydropower projects makes
41 allocation of total impacts to the several purposes challenging. Many Life Cycle Assessments (LCAs) to date
42 allocate all impacts of hydropower projects to the electricity generation function, which in some cases may
43 overstate the emissions for which they are ‘responsible’. Allocating all impacts of hydropower projects to
44 electricity generation is in line with the previous requirements set by the product category rules (PCR) for
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2 preparing an Environmental Product Declaration (EPD) of hydroelectricity (Setterwall, 2007). This PCR has
3 recently been updated and opens up for considering allocation of burdens in multi-purpose reservoirs.
4
5
6

7 The purpose of this study is to:

- 8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
1. Review the most common approaches for the distribution of environmental burdens and resources consumption, based on the principles outlined by the ISO standard 14044 (2006) in the light of water consumption from multipurpose reservoirs.
 2. Demonstrate the use of the various allocation approaches for water consumption based on real cases with specific water consumption datasets, and assess the appropriateness of the various allocation procedures.
 3. Propose recommendations and guidelines for the operative use of the allocation procedure for water consumption in multipurpose reservoirs with hydropower production. These burden-distributing guidelines should also be considered more widely relevant for LCA studies of multipurpose reservoirs.

28 To the authors' knowledge there are no scientific publications attempting to allocate the burden of water
29 consumption or any other resource consumptions or emissions from multipurpose reservoirs, except the study on
30 Glen Canyon Dam multipurpose reservoir (Pasqualetti & Kelly, 2008). The novelty in our study is for this reason
31 the application of existing data on a wide range of allocation methods, based on use of existing hydrological,
32 technical and socio-economic data and not in the collection of new data. Rather opposite, the intention has been
33 to apply available data in a new way, which would be the situation when this type of studies are to be carried out
34 as part for instance an environmental impact assessment. We would also stress that the purpose of this study is
35 not to identify generic allocation ratios to the various functions, but test allocation methods. We believe
36 hydropower projects and multipurpose projects in particular are so case-specific, that generic ratios are not
37 possible to find.
38
39
40
41
42
43
44
45
46
47

48 There is a great need in establishing justifiable allocation methods for multipurpose reservoir outside the
49 scientific community. The recently established ISO Water Footprint Standard (ISO 14046, 2014) lacks proper
50 allocation rules, the initiative launched by World Water Council and their program on water and energy
51 coordinated by EdF (<http://www.worldwatercouncil.org/programs/water-energy/>) underline the importance of
52 the topic, as well as the concerns expressed by the hydropower sector (IHA, 2011).
53
54
55
56
57
58
59
60
61
62
63
64
65

2 Methodology for allocation of burdens in multi-output systems

2.1 Allocation models and data requirements

In order to choose the most appropriate model for distributing the environmental burdens between functions in a multi-output system, one has to take into account the scope of the study, data availability, and the characteristics of the process under study (European Commission, 2010). The starting point for a LCA-study should, however, always be the hierarchy given by ISO 14044 (ISO 14044, 2006), which means following the order given below.

If possible, allocation should be avoided by:

- 1A: Subdividing the product system
- 1B: Using system expansion/avoided burdens to include the additional functions

If allocation cannot be avoided, allocation should be based on:

- 2A: Physical relationships (mass, volume or energy)
- 2B: Other relationships (economic or others relationship, e.g. explicit prioritizing)

According to the ILCD handbook (European Commission, 2010), subdividing the product system (1A) will require subdividing the multipurpose reservoir individually for those of the mono-functional processes that relate to the analysed system. The use of 1A is considered irrelevant for multipurpose reservoirs as this approach is designed for production lines that can be completely separated and the resource consumption/emissions assigned to each type of product or service. In contrast, multipurpose reservoirs holds one large pool of the same resource and cannot be separated unless the water is divided in each function based on volume of water used, which would lead to volume allocation as the approach (2A).

System expansion/avoided burdens (1B) means to add another function to make two systems comparable, or to subtract the inventory of another system (representing another way of fulfilling the not required function) from the analysed system (European Commission, 2010). The use of 1B would imply removing and adding functions and then assessing the changes in the water consumption. The order this virtual 'stripping of functions' is made will affect how much the water consumption is reduced. To define a fair basis, not determined by the order the functions are removed or added, the use of 1B will also ultimately lead to volume allocation (2B) as the allocation method.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Using allocation is the last step in the ISO hierarchy. Allocation is also called ‘partitioning’ and this ‘solves the multi-functionality by splitting up the amounts of the individual inputs and outputs between the co-functions according to some allocation criterion, being a property of the co-functions’ (European Commission, 2010, page no 79). The European Commission (2010) also states that the underlying causal physical (including chemical and biological) relationships between the functions should be reflected in the allocation. Mass allocation (2A) is considered giving the same outcome as volume allocation for the case of water reservoirs. If physical relationships cannot be established, allocation should be based on some other relationship, which could be economic or other non-causal physical property.

In the case of multipurpose reservoirs, explicit prioritizing between sectors is defined in some countries, e.g. India (Government of India - Ministry of Water Resources, undated) and Turkey (A. Ü. Şorman, personal communication, 2013), as the authorities have stated clear priority rules for the allocation given by the importance for the society as a whole. Explicit prioritizing could be interpreted that the highest priority should have all the share of the water consumption (100 %), the highest share (e.g. 50 % if 3 or more users) or another allocation ratio, independent of how large volumes of water that is withdrawn to each purpose. Alternatively, a hybrid allocation version combining the priority and the volume water withdrawn (weighted by priority) could be used.

Table 1.

2.2 Basis for assessment

As the calculated burden-distribution from the various allocation models cannot be said to be right or wrong, the qualitative criteria formulated by the International Reference Life Cycle Data System (ILCD) (European

Commission, 2010) formed the basis for our assessment of the appropriateness of the different allocation models in the context of multipurpose reservoirs and water consumption, which are:

- Scientific robustness, i.e. how sensitive the model is to changes in input from its initial stable configuration.
- Transparency and reproducibility, i.e. how easily the assessment is understood and if it can be reproduced (with the same output) by a different and independent assessment.
- Applicability, i.e. if the use of the allocation model in a real case can be carried out in a process that is practical, cost-effective and easy to communicate.
- Level of documentation, i.e. if reliable information and data is readily available with reasonable efforts.
- Stakeholder acceptance, i.e. to what extent the model is perceived fair among the stakeholders.

3 Datasets used for demonstration and assessment

The World Register of Dams (ICOLD, 2014) is considered holding the most complete dataset of large dams and reservoirs, and holds information about close 39 000 dams and reservoir among the world's 45 000 large dams (WCD, 2000) built for the purpose of irrigation, flood control, navigation, urban water supply schemes and other purposes. Approximately 25 % of the world's dams higher than 15 meters registered in the ICOLD database (i.e. close to 10 000 dams) are classified as dams with reservoirs serving multiple functions ('multipurpose reservoirs/dams'). Among the multipurpose reservoirs, irrigation is the most common purpose followed by flood control, water supply, hydropower generation, recreation and navigation/fish farming. Approximately 40 % of the multipurpose dams serve hydropower production as one of several functions.

The cases in our study are selected based on the fact that they should represent a diversity of multipurpose reservoirs, be located in water-stressed areas, have a different mix of functions and be geographically distributed.

We have included two Spanish cases as they are in different stages, i.e. one in the planning phase and one in operation, representing different situations with respect to availability of data. We would underline that the main purpose of the study is to demonstrate the performance of the various allocation models, and not to produce exact numbers of the water consumption rates and shares.

1
2 It should be noted that the water consumption values given in Table 2 are provided on the following basis; 1) the
3 water consumption values are calculated by the ‘gross evaporation approach’ (Bakken *et al.*, 2013b), 2) all the
4 losses are assigned to power production, and 3) only losses in the operational phase are included. All numbers in
5 the Table 2-6 are given as typical numbers or long-term annual averages to the extent such numbers have been
6 available. If data for a specific procedure of allocating losses is not available or the allocation method is not
7 considered feasible for other reasons, this is indicated by N.A. in the table.
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24

25 Table 2.

26 **3.1 Sri Ram Sagar Project (SRSP), India**

27 The Sri Ram Sagar Project is a multipurpose project, located across the Godavari River near Pochampad of
28 Nizamabad District in Andhra Pradesh, India. The catchment area at the dam site is 91 751 km², and the average
29 inflow to the reservoir is at 283.4 m³/s, given an annual volume of 8 937 mill. m³/year (Sauterleute *et al.*, 2012).
30
31
32
33
34
35
36

37 According to the state policy of India (Government of India - Ministry of Water Resources, undated), drinking
38 water is the top priority, followed by irrigation, hydropower, industrial and other uses. In the case of SRSP,
39 drinking water supply, irrigation and power production are the uses, and the water is withdrawn directly from the
40 reservoir. The water used for hydropower production is released directly into one of the irrigation canals
41 (Kakatiya canal), hence this volume of water is ‘double counted’ in our study. This is not considered problematic
42 as it is the share per function that is relevant for the water consumption calculations.
43
44
45
46
47
48
49
50
51
52
53
54

55 Table 3.

1 The data provided on ‘volume allocation’ are water requirements (demand fulfilment) (Sauterleute *et al.*, 2012),
2 which match fairly well the available water volume in a typical hydrological year, taking into account
3 evaporation from the surface and periods of spill. As the inflow can vary considerably from a wet to a dry year,
4 the actual allocation for a particular year might deviate from the numbers given in Table 3. According to the
5 rules of allocation, the volumes of water for domestic supply will persist, while irrigation, and possibly
6 hydropower depending on to which canal the water will be released, will be reduced.
7
8
9
10

11
12
13
14
15 As the energy allocation is directly derived from the volume allocation and not taking into account the variation
16 in head, the share will stay identical to changes in the volume allocation. Similarly, the calculated economical
17 allocation based on the ‘loss of energy production’ where a constant electricity price is assumed, the share will
18 follow the change in water volumes. The average electricity price for India (2011) is taken from the Web site
19 ‘Shrink that footprint’ (<http://shrinkthatfootprint.com/average-electricity-prices-kwh>). The more time-consuming
20 method of obtaining data on economic benefits based on data from the individual sectors will provide a different
21 picture as this will not be directly linked with the changes in withdrawal from the reservoir taking into account
22 other factors that also might influence the outcome.
23
24
25
26
27
28
29
30

31 32 33 34 **3.2 Aswan High Dam, Egypt** 35

36
37 The Aswan High Dam is an embankment dam situated across the Nile River in Aswan, Egypt, by the border of
38 Sudan, built just upstream of the Old Aswan Dam. The large upstream reservoir has a capacity of storing 162
39 km³ and is the major reservoir providing regulated flow to both power plants as smaller reservoir between the
40 dams can only hold 1 km³ of water (ICOLD, 2014). The power production of Aswan High Dam and Old Aswan
41 Dam is 7.0 TWh and 2.7 TWh respectively, and these two plants is in the context of water consumption assessed
42 as one production unit. High Aswan Dam is a multipurpose project and the main reason for construction was to
43 develop irrigation systems for increasing rice and sugar-cane cultivation. The construction of the dam enabled
44 perennial irrigation, whereby water is available at any time throughout the year (Abu-Zeid & El-Shibini, 1997).
45 Other objectives enabled by flow regulation of the Nile River are flood protection, hydroelectricity generation
46 and improved navigation (Abu-Zeid & El-Shibini, 1997). The plants further downstream the Nile (Assiut
47 Barrage, Esna Barrage, Nag-Hamady Barrage and New Esna Barrage) might also benefit from the regulation
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 provided by the Aswan High Dam, but except for Esna Barrage (600 GWh/year) (ICOLD, 2014), the production
2 is unknown.
3
4
5
6
7
8

9 Table 4.
10
11
12
13

14 The volume of water used for power production comes from Owen-Thompson *et al.* (1982), the volume set aside
15 for flood protection is from ICOLD (2014), while the values on irrigation, domestic water supply and navigation
16 are from Oosterbaan (1999). The water used for power production is returned to the river basin and released for
17 other purposes downstream, and hence ‘double-counted’ in our study. Similar to the study in India, this is not
18 considered problematic as it is the share per function that is relevant for the water consumption calculations. The
19 numbers on power production is from Abu-Zeid & El-Shibini (1997), while the other numbers used in the energy
20 allocation is derived from this and the ratios calculated for volume allocation.
21
22
23
24
25
26
27
28
29
30

31 All the data for the economic allocation are from Biswas & Totajada (2004). This source does not include
32 economic benefits for industries and municipalities, which are hard to obtain. We have not been able to obtain
33 information on priority of water use, but it is likely that domestic water supply has the highest priority as in the
34 other cases investigated.
35
36
37
38
39
40
41
42

43 The numbers on allocation of water volumes and economic benefits vary a lot between the different sources
44 visited, which might be due to high uncertainty in the calculations, different approaches for calculation and that
45 there might be great differences from year to year due to climatic and hydrological conditions. As an example,
46 Strzepek *et al.* (2008) estimate the value of the Aswan High Dam to the Egyptian economy to be in the range of
47 2.7 % to 4.0 % of GDP. The sum of the estimates of economic values for each function given by Biswas &
48 Totajada (2004) in Table 4 is 255 mill. GEP/year, which corresponds to approximately 0.05 % of GDP.
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

3.3 Case Mularroya dam, Spain

Mularroya dam is presently under planning as part of the Bajo Jalón regulation system in the region of Zaragoza in the North-Eastern part of Spain. The entire system regulates a 7 088 km² watershed with an average yearly inflow of 315.6 hm³, which corresponds to an average discharge of 10.0 m³/s (Viability Plan Mularroya Dam, 2007). The system is composed by the Mularroya reservoir in Grío River, which will receive water by a diversion channel via a dam in Jalón River, one of the principal tributaries of the Ebro.

The water volume transferred from Jalón River to Mularroya reservoir is annually around 58.8 hm³, and the annual inflow from Grío to Mularroya is 20.4 hm³ (natural inflow) giving a total inflow to Mularroya reservoir equal to 79.2 hm³. 26 340 hectares of land are irrigated based on water from the reservoir.

The Plan of Viability (Viability Plan Mularroya Dam, 2007) describes the economic benefits obtained from the different water services offered by Mularroya multipurpose reservoir, and the priority is given by the Ebro Basin Hydrologic Management Plan (CHE, 2011).

The water supply of the population includes the water needs of those industries located in urban areas and with limited water requirements. The environmental flows and flood control are not considered as water uses, but as restrictions that must be fulfilled as soon as the needs for drinking water are met.

Table 5.

All the numbers on volume allocation are from Fernandez González (2011). The volume for flood control is set as a certain percentage (20 %) of the total storage capacity (Viability Plan Mularroya Dam, 2007). The estimated power generation is from Fernandez González (2011), while the ‘lost’ energy production due to releases for other purposes is calculated using the same ratio as for power generation. The allocated volume for flood control is considered lost for power production. This is a conservative assumption, which will imply that a conservatively high energy allocation is assigned to the purpose of flood control. It is not known if any of the purposes use the same water volumes, e.g. that the hydropower generation and irrigation canals are linked. The

1 numbers on economic allocation are for power generation from the Viability Plan (Viability Plan Mularroya
2 Dam, 2007), while the others are from Fernandez González (2011).
3
4
5

6 7 **3.4 Porma Dam, Spain** 8

9 Porma dam is located in the North-western part of Spain within the Duero river Basin. Porma Dam is part of the
10 water regulation system known as Elsa-Valderey, where Porma Dam is located between Puebla de Lillo and
11 Boñar (León). The Elsa Valderey system is composed by four reservoirs: Riaño, Porma, Casares and Ricobayo,
12 where Riaño and Porma are the most important reservoirs in the regulation of the system. The yearly average
13 inflow is 311.6 hm³ which corresponds to an average discharge of 9.9 m³/s.
14
15
16
17
18
19
20
21

22 The Porma reservoir serves a vital mission in the regulation of the rivers in Leon and has reduced the risk of
23 floods to the downstream areas that historically have suffered from severe flood events. The reservoir provides
24 water to irrigate about 35 990 hectares and the reservoir is used for energy production, water supply and
25 recreational activities, such as water sports (CHD, 2012a).
26
27
28
29
30

31
32
33
34 Table 6.
35
36
37
38

39 The water volume allocated for power production is obtained from Pérez *et al.* (2008), verified against data
40 received from Duero Basin authorities (CHD, Technical Directorate of Public Participation and Citizen
41 Information Service), and the water volume is estimated assuming full power production for 19 weeks. The
42 water volumes for water supply and ecological flows are taken from the Duero Basin Hydrologic Management
43 Plan (CHD, 2012a), numbers on irrigation water have been received from Juan Ignacio Pérez (Pérez, J.I.,
44 personal communication, 2013), and the volumes for flood control are based on de la Torre (undated). It should
45 be noted that the numbers on water supply includes the industrial uses in urban area. Data on the energy
46 generation from the hydropower plants is from Pérez *et al.* (2008), and the numbers on energy allocation for the
47 other functions are calculated based on the same water volume-energy ratio as the power production, except for
48 irrigation where the energy allocation is calculated as the loss of energy due to the dependence of irrigation. It is
49 assumed that the water and energy allocation for the different purposes are independent of each other. The
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 numbers on economical allocation are for power generation from Hydrographic Demarcation of Duero River
2 (DHD 2005), and water supply and irrigation from (CHD, 2012b). Numbers on the economic benefits from
3 release of ecological flow (which also include the benefits of recharging aquifers) are from Fernández González
4 (2011), while the data on economic benefits of flood control to reduce the flood risk in Benavente are estimates
5 using the invest of a project by the Ministry of Environment (EL MUNDO, 2010), the Ministry establish 2.3
6 millions of euros in Benavente (where takes place the confluence of five major rivers, one of them Porma River).
7 According to the Significant Risk Areas of Potencial Flood (MAGRAMA, undated) in Benavente has been
8 documented 93 historic flooded where 14 has been in Porma, therefore a recalculation for Ministry invest due to
9 Porma flooded has been done. The prioritizing is given by Duero Basin Hydrologic Management Plan (CHD,
10 2012c).

11
12
13
14
15
16
17
18
19
20
21
22
23 It should be mentioned that the volume of water allocated to hydropower depends on the amount of water
24 designated to irrigation, i.e. the regulation in irrigation will affect the energy production. After the summer, the
25 reservoir normally holds a minimum volume of water due to the supply of irrigation water and low inflow during
26 the preceding months. If the reservoir volume falls below 50 hm³ or 30 hm³ the irrigation flow will be reduced
27 by 20 % to 50 %, respectively. This illustrates the complexity of find the ‘correct’ volumes of water for the
28 various functions.
29
30
31
32
33
34
35
36
37
38
39
40

41 **4 Results and discussion**

42
43
44 The data for each case have been systemised in order to find each function’s share of the water consumption for
45 each burden-distributing model used (Figure 1). In Table 7 the numbers for the hydropower function are shown
46 alone, as absolute numbers.
47
48
49
50
51
52

53 Figure 1. The panel of figures presents the allocated share [%] of the gross water consumption rates for the
54 different functions in the four case studies of multipurpose reservoirs, based on the various burden-distributing
55 models.
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5 Table 7.
6
7
8
9

10 Figure 1 and Table 7 show that for the volume allocation model, power generation gets from 2 % to 39 % of the
11 water consumption. For energy allocation, the lower number is 2 % while the upper is close to 50 % of the total
12 gross water consumption. Using economic allocation, power generation is allocated 4 % to 39 % of the gross
13 water consumption. As water supply has in all cases the highest priority, explicit prioritizing leads to zero water
14 losses allocated power production in all cases. For three of the four cases, the differences between allocation
15 based on volume and energy are small. For the Porma case, however, all these three allocation models (volume,
16 energy and economy) give quite diverging results. For power production, the resulting gross water consumption
17 varies by a factor of almost ten, from 11 m³/MWh to 109 m³/MWh. The explanation is that the diversity of
18 literature sources calculating the water volumes consumed, economic benefits, etc. is the highest for this case,
19 which give very inconsistent outcomes. For all cases, explicit prioritizing is the burden-distribution model that
20 stands out from the others, which is due to its simplistic approach we have selected of allocating all the loss to
21 only one function.
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36

37 The volume allocation model appears more feasible as data on water volumes for irrigation, power production,
38 etc. are very basic in planning and management of reservoirs. The difficulties encountered during application of
39 this model are related to setting appropriate system boundaries. Water use is not always consumptive as water
40 could be returned to the downstream river. In the case of hydropower, all the water that is diverted into the inlet
41 structure of the plants is released downstream. The water used for domestic supply will also often ultimately
42 return to the basin, but often with reduced quality. The water volumes for flood control are not withdrawn nor
43 used, but treated as the other functions as it could be argued that this volume could not be used for other
44 purposes. Environmental flows and navigation simply releases water to the downstream areas, and the use of the
45 reservoir water can hence be considered very similar to hydropower production.
46
47
48
49
50
51
52
53
54
55

56 Our approach of calculating the energy allocation was by using the numbers on volume allocation and the ratio
57 between volume and energy generation for hydropower and imposing the same ratio of the other functions. This
58 is an approach that is easy to use as long as numbers on volumes of water and hydropower production is
59
60
61
62
63
64
65

1 available, and the assumption that the relation between volume and energy production/loss is constant, i.e. not
2 taking into account variations in head (variation in water level).
3
4
5
6

7 The economical allocation can be based on the energy calculation ('loss of energy') and the ratio of power
8 generation and economic benefit, which was done in the SRSP case. This approach holds the same assumptions
9 and limitations as the energy calculations, but ignores the effect that the power price might vary over time. In the
10 three other cases, the numbers on economic value is calculated by the referred sources, with limited information
11 on how these numbers are established. The direct economic value often underestimates the real value of the
12 resource, and the social value of water can be very high (e.g. Kadigi et al., 2008), especially in countries with an
13 agricultural sector providing food to the under-privileged. We would underline that great caution should be made
14 when introducing numbers calculated by different studies/sources, such as in the Mularroya case, where we can
15 see from Table 5 that there are very large difference in the estimates in the economic value of irrigation and
16 industrial uses/flood control, as the numbers can be established based on very different assumptions and
17 methodological approaches. This problem is also illustrated by compiling numbers from different sources on the
18 Aswan High Dam case. The study by Pasqualetti & Kelly (2008) on Glen Canyon Dam multipurpose reservoir
19 used economic value (2B) to allocate the burden of the water consumption, assigning 55 % of the burden to
20 hydropower production. This is the only study on allocation known by the authors, but due to the site-specific
21 nature of multipurpose reservoirs, the transferability of the numbers by Pasqualetti & Kelly (2008) is considered
22 limited. Applying economic allocation might also have the undesired effect that those functions that generate the
23 highest economical income per m³ (most cost-efficient) are 'punished' by taking a higher burden of the water
24 consumption than those functions generating the least income per m³.
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45

46 The volume allocation model will also often form the basis for calculation of energy allocation (as how we made
47 it), and will in some cases also be the starting point (or a proxy) for the use of the economic allocation model
48 (2B). Referring to the assessment criteria in Section 2, the volume allocation is considered being more
49 scientifically robust, is more transparent and easier to reproduce, as well as being easier applicable with a better
50 level of documentation (data easier accessible and more precise) than energy and economic allocation. It could
51 be questioned if volume allocation has a higher stakeholder acceptance, as some stakeholders might argue that
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 activities (functions) with a high economical profit should take a larger burden of the resources consumption due
2 to their financial strength.
3
4
5

6
7 Explicit prioritizing is not given as an allocation procedure in ISO 14044 (ISO, 2006), but tested in this study
8 due to its relevance for multipurpose reservoirs. The results presented in Figure 1 show that ‘explicit prioritizing’
9 with a 100 % burden on the top priority appears as an over-simplistic model as the top priority takes all the
10 burden from all the other functions, even when the volumes of water for this purpose can be very limited. As
11 domestic water supply has the highest priority in all our cases, this sector will then take a very large burden of
12 the water consumption. The method is very simple and quick to apply as long as the priorities are clearly given
13 by the authorities of water management authorities. We believe, however, that the scientific robustness and the
14 stakeholder acceptance of the method could be questioned, as the sector given the highest priority might feel that
15 their burden for the resource consumption ends up being too high. The decision on setting the priorities is
16 exclusively political, not based on any physical or economic analysis of the system.
17
18
19
20
21
22
23
24
25
26
27
28
29

30 The assessors’ prior knowledge to a system will affect the resources needed to find reliable data/information
31 about the case. For the cases presented in this article, one of the authors had prior knowledge about the SRSP
32 and had carried out a site visit. For the Spanish cases most of the documentation was only available in Spanish.
33
34
35
36
37
38

39 Setting proper system boundaries is a well-known challenge in LCA-studies (Modahl *et al.*, 2013), also
40 discussed in the context of calculating water consumption (Bakken *et al.*, 2013b) and is a problem we
41 encountered in this study too. Setting proper spatial boundaries for the volume calculation is very important. Key
42 questions to be raised when drawing the boundaries on volume allocation are from where is the water
43 withdrawn? Is the withdrawn water returned into to river basin and hence available for downstream users? Does
44 the water evaporate and return as precipitation elsewhere in the river basin? In the case of Aswan High Dam, this
45 reservoir regulates the flow and secures reliable access to water to the downstream areas all the way to the
46 Mediterranean Sea all-year around. Just a portion of the water is withdrawn directly from the reservoir, but
47 provides regulated flow several kms downstream the dam. Proper spatial system boundaries might hence
48 include the reservoir and all downstream areas benefitting from it. Adding further complexity to this, water
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2 might have reduced quality when returned, described as the ‘grey water footprint’ according to the water
3 footprint terminology (Hoekstra *et al.*, 2011).
4
5
6

7 A similar methodological challenge to assessing the right volumes appear in the next step when allocating the
8 losses based on energy (loss of energy) and economic value. As the lost energy generation is calculated directly
9 from volumes of water, the spatial boundaries would be directly adopted from the calculation of volumes. In the
10 case of economic value these will be calculated directly on lost energy generation and the spatial boundaries will
11 also follow the boundaries of the flow of water. If the economic value is calculated with use of more
12 comprehensive macro-economic models, similar decisions must be made with respect to which benefits should
13 be included.
14
15
16
17
18
19
20
21
22
23

24 Many parts of the world experience large seasonal variations in hydrology, having a distinct wet season
25 contrasted by a longer dry season with limited access to water, where the construction of reservoirs is a common
26 way of securing adequate supply all-year around. This would mean that high water consumption in periods with
27 abundant water resources would be unproblematic, while the water resources must be managed with greater care
28 in periods of water stress, unless storage overcomes the seasonal differences. It could then be argued that
29 consumption of water in periods with abundant sources should be ‘fined’ less than use of water in periods with
30 deficit, i.e. weighting the water consumption by availability of water over time.
31
32
33
34
35
36
37
38
39
40
41
42
43

44 **5 Conclusions and recommendations**

45
46
47 The examination of the four cases of multipurpose reservoirs with hydropower was used to examine the
48 appropriateness of different burden-distribution models in the context of water consumption. Based on our study
49 we recommend the following:
50
51

- 52 • We consider volume allocation to be the most robust approach for allocating water consumption
53 between competing functions in multipurpose reservoirs.
54
- 55 • We recommend that data should preferably be gathered from one source for all functions, to ensure a
56 consistent calculation approach.
57
58
59
60
61
62
63
64
65

- The system boundaries of the analysis should be defined with great care, but typically be set equal to the hydraulic system boundaries.
- We propose that a site visit should be undertaken if an allocation study is carried out, as this will reduce the uncertainties and inconsistencies in the calculations, quality assure assumption and possible remove errors in the data.

We also tested other allocation methods described ISO 14044 (ISO, 2006), and our findings were:

- Systems expansion/avoided burdens: these allocation approaches are both considered inappropriate for our need, as multipurpose reservoirs share one common pool of water and separate production lines cannot be identified (1A), nor can single function easily be added or removed (1B).
- Energy allocation: in all the examined cases this approach is based on the results of the volume allocation, while introducing simple assumptions on the relation between volume allocation and loss of energy production. This approach will hence experience the same methodological challenges as volume allocation, but will introduce additional uncertainties.
- Economic allocation: this approach can be based on results from volume and energy allocation, thus inherit all the methodological challenges from these approaches as well as incurring new uncertainties. Alternatively, macro-economic analysis can be applied with a different set of uncertainties. These two approaches can possibly produce very different results.
- Explicit prioritizing: This is a very simplistic approach that is easy to apply, but does not capture the multipurpose aspects of reservoirs if the top priority is assigned 100 % of the burden.

In this paper, the allocation challenges have been highlighted by using water consumption as indicator. There is, however, no difference between allocating water consumption and other substances (resources or outputs) from a multipurpose process in LCA. The conclusions and recommendations in this paper should, therefore, just as well be seen as recommendations for allocation of energy investments, green-house gas emissions, other resources, waste and emissions to air and water, from building and use of a multipurpose reservoir.

6 Acknowledgement

The study has received financial support via EcoManage, funded by the Research Council of Norway (contract no: 215934/E20). EcoManage is organised under the research centre CEDREN (Centre for Environmental Design of Renewable Energy – www.cedren.no).

We would also like to thank Juan Ignacio Pérez, Department of Hydraulic and Energy Engineering at the Technical University of Madrid (UPM) for providing useful information about the Spanish cases.

7 References

- Abu-Zeid MA, El-Shibini FZ (1997). Egypt's Aswan High Dam. *Water Resources Development* 13(2), 209-217.
- Bakken T.H., Skarbøvik, E., Gosain, A.K., Palanisami, K., Sauterleute, J., Egeland, H., Kakumanu, K.R., Nagothu, U.S., Harby, A., Tirupataiah, K. & Stålnacke, P. (2013a). Water Allocation With Use of the Building Block Methodology (BBM) in the Godavari Basin, India. *Journal of Sustainable Development* 6(8), 93-107.
- Bakken, T.H., Killingtveit, Å., Engeland, K., Alfredsen, K. & Harby, A. (2013b). Water consumption from hydropower plants – review of published estimates and an assessment of the concept. *Hydrology and Earth System Sciences* 17, 3983-4000. doi:10.5194/hess-17-3983-2013.
- Biswas, A.K. & Tortajada, C. (2004). Hydropolitics and Impacts of the Aswan High Dam. Submitted to: Advisory Panel Project on Water Management, Ministry of Water Resources and Irrigation, Cairo, Egypt.
- CHD Technical Directorate of Public Participation and Citizen Information Service (2014). Average daily flow total output, instant data output rate and the average flow turbinated data for hydrological year 2012-2013. Received 7 January 2014.
- CHD (Duero River Management Confederation) (2012a). Duero Basin Hydrologic Management Plan. Appendix 1, Modified water bodies. Confederación Hidrográfica del Duero. Ministerio de Medio Ambiente y Medio Rural y Marino. Gobierno de España.
- CHD (Duero River Management Confederation) (2012b). Duero Basin Hydrologic Management Plan. Appendix 9, Cost Recovery. Confederación Hidrográfica del Duero. Ministerio de Medio Ambiente y Medio Rural y Marino. Gobierno de España.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

CHD (Duero River Management Confederation) (2012c). Duero Basin Hydrologic Management Plan. Technical report. Confederación Hidrográfica del Duero. Ministerio de Medio Ambiente y Medio Rural y Marino. Gobierno de España.

CHE (Ebro River Management Confederation) (2011). Ebro Basin Hydrologic Management Plan. Technical report. Confederación Hidrográfica del Ebro. Ministerio de Medio Ambiente y Medio Rural y Marino. Gobierno de España.

Chenoweth, J., Hadjikakou, M., & Zoumides, C. (2014). Quantifying the human impact on water resources: a critical review of the water footprint concept. *Hydrology and Earth System Sciences* 18, 2325–2342. doi:10.5194/hess-18-2325-2014.

Cooley, H., Fulton, J. & Gleick, P.H. (2011). Water for Energy: Future Water Needs for Electricity in the Intermountain West. Pacific Institute. ISBN: 1-893790-36-3, ISBN 13: 978-1-893790-36-0.

DHD (Duero Hydrographic Demarcation) (2005). Summarize report Articles 5 and 6 of Water Frame Directive. Chapter 5: Economical Analysis. Ministerio de Medio Ambiente. Gobierno de España.

De la Torre, A.J.R., Castro, L.A., Lasso, J.R.P. & de Grad, J.P. (undated). Comité Nacional Español De Grandes Presas. Gestión De Avenidas Y Normas Para Elaccionamiento De Compuertas En La Presa De Juan Benet.

Demeke, T.A., Marence, M. & Mynett, A.E. (2013). Evaporation from reservoirs and the hydropower water footprint, in: Proc Africa 2013, 16–18 April 2013, Addis Ababa, Ethiopia.

EL MUNDO (2010). The Ministry of Environment will invest 2.3 Million of Euros to reduce the flood risk in Benavente and Los Valles. <http://www.elmundo.es/elmundo/2010/05/20/castillayleon/1274375566.html>. Accessed 20 April 2015.

European Commission (2010). ILCD Handbook. International Reference Life Cycle Data System. General Guide for Life Cycle Assessment – Detailed Guidance.

FAO (2015). Food and Agriculture Organization of the UN. AquaMaps. <http://www.fao.org/nr/water/aquamaps>. Accessed 20 April 2015.

Fernández González, M. (2011). Análisis socioeconómico de viabilidad del proyecto de presa de Mularroya, azud de derivación y conducción de trasvase. Máster Universitario en hidrología y gestión de recursos hídricos. Estudios Universitarios de Posgrado de las Universidades de Alcalá y Rey Juan Carlos (coordina Universidad de Alcalá).

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Fulton, J., & Cooley, H. (2015). The water footprint of California's energy system, 1990-2012. *Environmental Science and Technology* 49(6),3314-21. doi: 10.1021/es505034x.

Government of India - Ministry of Water Resources (undated) State Water Policies and the National Water Policy for water management practices. <http://wrmin.nic.in/writereaddata/linkimages/anu29668628373.pdf>. Accessed 20 April 2015.

Hoekstra, A.Y., Chapagain, A.K., Aldaya, M.M. & Mekonnen, M.M. (2011). The water footprint assessment manual: Setting the global standard, Earthscan, London, UK.

ICOLD (2014). World Register of dams. Data accessed 18 June, 2014. This is a database with restricted access.

IHA (2011). World Congress Bulletin: Summary of the International Hydropower Association Paper presented at the World Congress on advancing sustainable hydropower, New York, <http://www.iisd.ca/yimb/hydro/iha2011/html/yimbvol139num7e.html>. Accessed 20 April 2015.

IPCC (2011) Edenhofer, O., Pichs-Madruga, R., Sokona, Y., Seyboth, K., Matschoss, P., Kadner, S., Zwickel, T., Eickemeier, P., Hansen, G., Schlömer, S. & von Stechow, C.E.: IPCC Special Report on Renewable Energy Sources and Climate Change Mitigation. Cambridge University Press, Cambridge, UK and New York, NY, USA.

ISO 14044 (2006). Environmental management – Life cycle assessment – Requirements and guidelines (ISO 14044:2006). Standard Norge, Lysaker.

ISO 14046 (2014). ISO International Organization for Standardization. Environmental management — Water footprint — Principles, requirements and guidelines. Draft version August 2014.

Kadigi, R.M.J., Mdoe, N.S.Y., Ashimogo, G.C. & Morardet, S. (2008). Water for irrigation or hydropower generation? Complex questions regarding water allocation in Tanzania. *Agricultural Water Management* 95, 984-992.

MAGRAMA (undated). Cartographic Viewer Floodplain, (SNCZI-Inventario de Presas y Embalses). <http://sig.magrama.es/snczi/visor.html?herramienta=DPHZI>. Accessed 20 April 2015.

Mekonnen, M.M. & Hoekstra, A.Y. (2012). The blue water footprint of electricity from hydropower. *Hydrology and Earth System Sciences* 16:179–187. doi:10.5194/hess-16-179-2012.

1 Meldrum, J., Nettles-Anderson, S., Heath, G. & Macknick, J. (2013) Life cycle water use for electricity
2 generation: a review and harmonization of literature estimates. *Environmental Research Letters* 8, 015031
3 (18pp) doi:10.1088/1748-9326/8/1/015031.
4

5
6 Modahl, I.S., Raadal, H.L., Gagnon, L. & Bakken, T.H. (2013). How system boundaries affect the energy
7 indicator results for different electricity generation technologies. *Energy Policy* 63, 283–299.
8 dx.doi.org/10.1016/j.enpol.2013.09.005.
9

10
11
12 Oosterbaan, R.J. (1999). Hydrological and Environmental Impacts of the Irrigation Improvement Projects in
13 Egypt. ILRI, Wageningen, 51 pp. Report of an Egyptian-Dutch Drainage Panel consultancy assignment. On line:
14 <http://www.waterlog.info/pdf/irrimpr.pdf>. Accessed: Accessed 20 April 2015.
15
16

17
18
19 Oven-Thompson, K., Alercon, L., & Marks, D.H. (1982). Agricultural vs. hydropower tradeoffs in the operation
20 of the High Aswan Dam. *Water Resources Research* 18(6), 1605–1613.
21

22
23
24 Pasqualetti, M.J. & Kelley, S. (2008). The Water Costs of Electricity in Arizona. Arizona Department of Water
25 Resources, Phoenix, AZ.
26

27
28
29 Peláez, J.R.T. (2007) Consideraciones prácticas sobre la evaporación en los embalses de la España peninsular.
30 Practical considerations about evaporation in Spanish reservoirs. Centro de Estudios Hidrográficos del CEDEX.
31 Col. 1.947
32

33
34
35 Pérez JI (2013). Personal Communication. Irrigation data used in 2000 for the calculation of the dam head in
36 Porma Reservoir. UPM Madrid.
37

38
39
40 Pérez JI, José R, Wilhelmi JR, Maroto L (2008). Adjustable speed operation of a hydropower plant associated to
41 an irrigation reservoir. *Energy Conversion and Management* 49, 2973–2978.
42

43
44
45 Pfister, S., Saner, D. & Koehler, A. (2011). The environmental relevance of freshwater consumption in global
46 power production. *International Journal of Life Cycle Assessment* 16, 580–591. DOI 10.1007/s11367-011-0284-
47 8.
48

49
50
51 Sauterleute, J., Skarbøvik, E., Bakken, T.H., Egeland, H., Harby, A., Stålnacke, P., Nagothu, U.S., Palanisami,
52 K., Krishna Reddy, K. & Gosain, K. (2012). Application of the Building Block Methodology to the Sri Ram
53 Sagar Project, SINTEF Report No. TR A7181, Trondheim, Norway, 44 pp.
54

55
56
57 Setterwall C (2007). Electricity, steam and hot/cold water generation and distribution. PCR CPC code 171 and
58 173. <http://epdsystem.it/en/PCR/Detail/?Pcr=5802#.Uv4Zsv58O70>. Accessed 20 April 2015.
59
60

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Şorman, A.Ü. (2013). Presentation at Workshop on allocation and water transaction; Ankara, 15-17 April 2013 organized by the State Hydraulic Works (DSI) in Turkish.

Strzepek, K.M., Yohe, G.W., Tol, R.S.J. & Rosegrant, M. (2008). The value of the Aswan High Dam to the Egyptian economy. *Ecological Economics* 66(1), 117-126.

Viability Plan Mularroya Dam (2007). Informe De Viabilidad Proyecto De Presa De Mularroya, Azud De Derivación Y Conducción De Trasvase. (Zg/La Almunia De Doña Godina Y Otros).

1 Table 1. The table presents all possible functions of multipurpose reservoirs, those models that are considered
 2 feasible for sharing burdens from multipurpose reservoirs, how the use of these models can be understood in the
 3 context of multipurpose reservoirs and their data needs. The list is modified based on the classification system
 4 proposed by International Commission of Large Dams (ICOLD 2014).

Functions in a multipurpose reservoir	2A: Volume allocation	2A: Energy allocation	2B: Economic allocation
Power generation	Volume of water used for power generation.	Power production.	Income from hydropower production.
Water supply	Volume of water used for water supply.	Power production lost by withdrawal of water for water supply.	Value of water supply. Alternatively, the value of the loss of power.
Irrigation	Volume of water used for irrigation.	Power production lost by withdrawal of water for irrigation.	Income from increased agricultural production. Alternatively, the value of the loss of power.
Flood control	Volumes available for storage of inflow.	Lost power production due to reduced head (lowered water level), and less profitable operation of the reservoir.	The value of reduced risks of floods. Alternatively, the value of the loss of power.
Transportation/ navigation	Volume of water released to downstream areas and maintenance of a certain water level in the reservoir.	Lost power production due to less profitable operation of the reservoir. For the river locks – diversion of water.	The value of providing more efficient/cheaper transportation. Alternatively, the value of the loss of power production.
Fisheries/ aquaculture	In the case of withdrawal to external productions sites -	Lost power production due to withdrawal of water	The value of the increased commercial and recreational

(commercial)	volume of water withdrawn.	and/or less profitable	fisheries. Alternatively, the
	In the case of aquaculture in	operation of the reservoir.	value of the loss of power
	the reservoir – maintenance		production.
	of a certain water level.		
Recreation	Maintenance of a certain	Lost power production due	The value of the
	water level.	less profitable operation of	recreational activities in the
		the reservoir.	area. Alternatively, the
			value of the loss of power.
Environ-mental	Volume of water released to	Power production lost due	The value of intact (or less
flow to	downstream areas.	to diversion of water.	damaged) downstream
downstream areas			ecosystems. Alternatively
			the value of the loss of
			power production.

6

7 Table 2. Characteristics of the cases used in this study¹. Further description is provided in the Sections 3.1-3.4.

Data	Sri Ram Sagar Project, India	Aswan High Dam Project, Egypt	Mularroya dam, Spain	Porma Dam and reservoir, Spain
Evaporation rate [mm]	1696	2 850	1100	858
Surface area [km ²]	453	3 330	4.63	12.5
Total annual evaporation [mill. m ³]	768.3	9 500	5.09	10.7
Installed capacity [MW]	36	2 580	23.5	23.2
Annual power production [GWh]	236.5	9 700	25.9	48.8
Water consumption rate [m ³ /MWh]	3248	979	196.6	255.9

8

¹ The numbers for Sri Ram Sagar Project (SRSP) are from Bakken et al. (2013a) and Sauterleute et al. (2012), for Aswan High Dam derived from data provided by Abu-Zeid and El-Shibini (1997), FAO (2015) and Demeke et al. (2013), while the sources of information on Mularroya dam are Peláez (2007) and the Viability Plan Mularroya Dam (2007). The numbers on Porma Dam and reservoir are based on numbers provided by Peláez (2007) and CHD (2012a).

9 Table 3. Data for the various purposes/functions and allocation models of the Sri Ram Sagar Project.

10 11 12 13	1 2 3 4 5 6 7	2A: Volume allocation [mill. m ³ /year]	2A: Energy allocation [GWh/year]	2B: Economic allocation [mill. US \$/year]	2B: Explicit prioritizing
8	Power generation	3398.4	236.5	18.9	3
9	Water supply	241.2	16.8	1.34	1
10	Irrigation	5029.2	350.0	28.0	2

10

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

11 Table 4. Data for the various purposes/functions and allocation models of the Aswan High Dam.

Functions in the multipurpose reservoir	2A: Volume allocation [bill. m ³ /year]	2A: Energy allocation [GWh/year]	2B: Economic allocation [mill. GEP/year]	2B: Explicit prioritizing
Power generation	50	9 700	100	N.A.
Irrigation	46	8 924	140	N.A.
Flood control	47	9 118	10	N.A.
(Domestic) water supply and industries	5	970	N.A.	1
Navigation	1	194	5	N.A.

12

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

13 Table 5. Data for the various purposes/function and allocation models of the planned Mularroya Dam.

Functions in the multipurpose reservoir	2A: Volume allocation [hm ³ /year]	2A: Energy allocation [GWh/year]	2B: Economic allocation [Euro/year]	2B: Explicit prioritisation
Power generation	1.29	25.9	138 000	3
Water supply	1.55	31.1	83 000	1
Irrigation	59.38	1200	3 168 000	2
Industrial uses (excl. hydropower)	0.20	4.0	54 000	3
Flood control	20.66	414.6	7 000	(Restriction)

14

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

15 Table 6. Data for the various purposes/function and allocation models of the Porma Dam.

Functions in the multipurpose reservoir	2A: Volume allocation [hm ³ /year]	2A: Energy allocation [GWh/year]	2B: Economic allocation [mill. Euro/year]	2B: Explicit prioritisation
Power generation	98.2	48.8	1.8	3
Water supply	13.4	6.7	20.1	1
Irrigation	297	9.9	2.2	2
Ecological flow	47	23.4	8.2	(Restriction)
Flood control	19.5	9.7	0.35	(Restriction)

16


17 Table 7. Water consumption rates for hydropower [m³/MWh] for the demonstration cases applying the various
 18 allocation models. It should be noted that the ‘gross evaporation values’ are used as the basis for calculating the
 19 total water losses.

Case	2A: Volume allocation	2A: Energy allocation	2B: Economic allocation	2B: Explicit prioritizing
Sri Ram Sagar Project (SRSP), India	1273	1273	1 273	0
Aswan High Dam, Egypt	329	329	384	0
Mularroya Dam, Spain	3	3	8	0
Porma Dam, Spain	45	109	11	0


20

21


Sri Ram Sagar Project, India

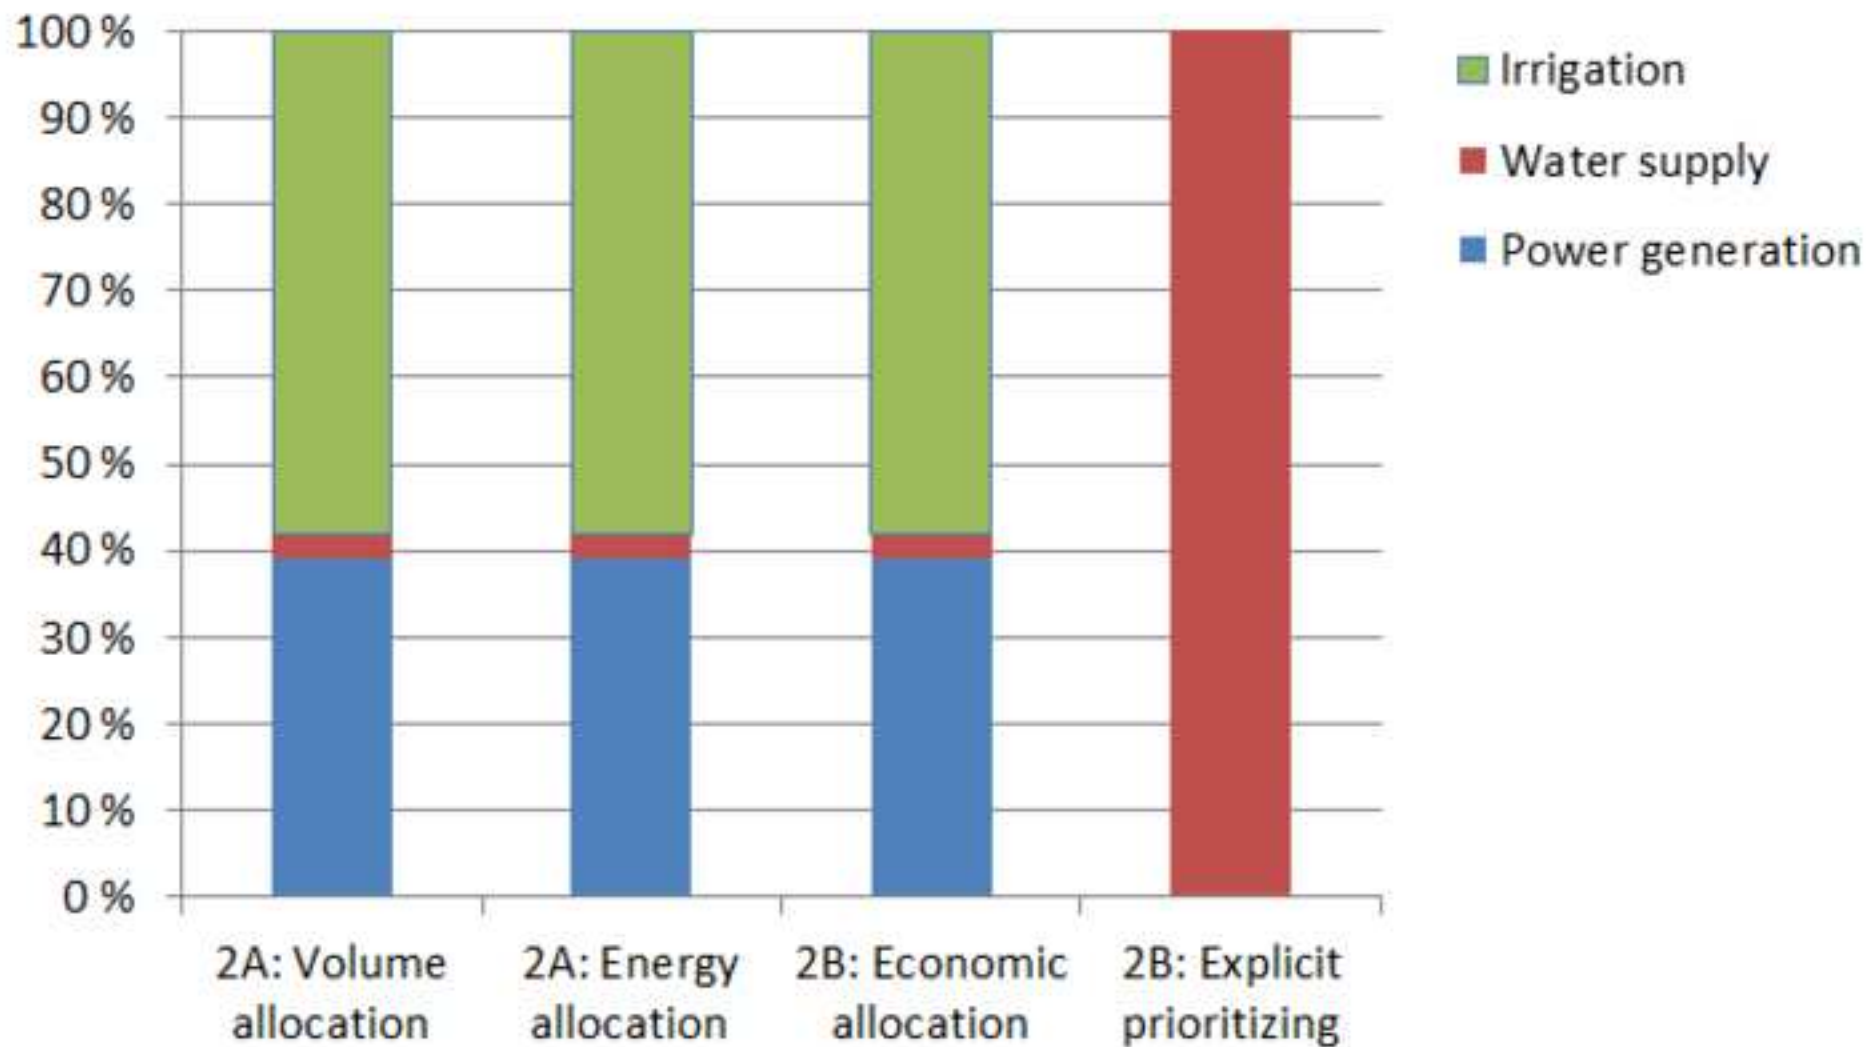

Mullaroya, Spain

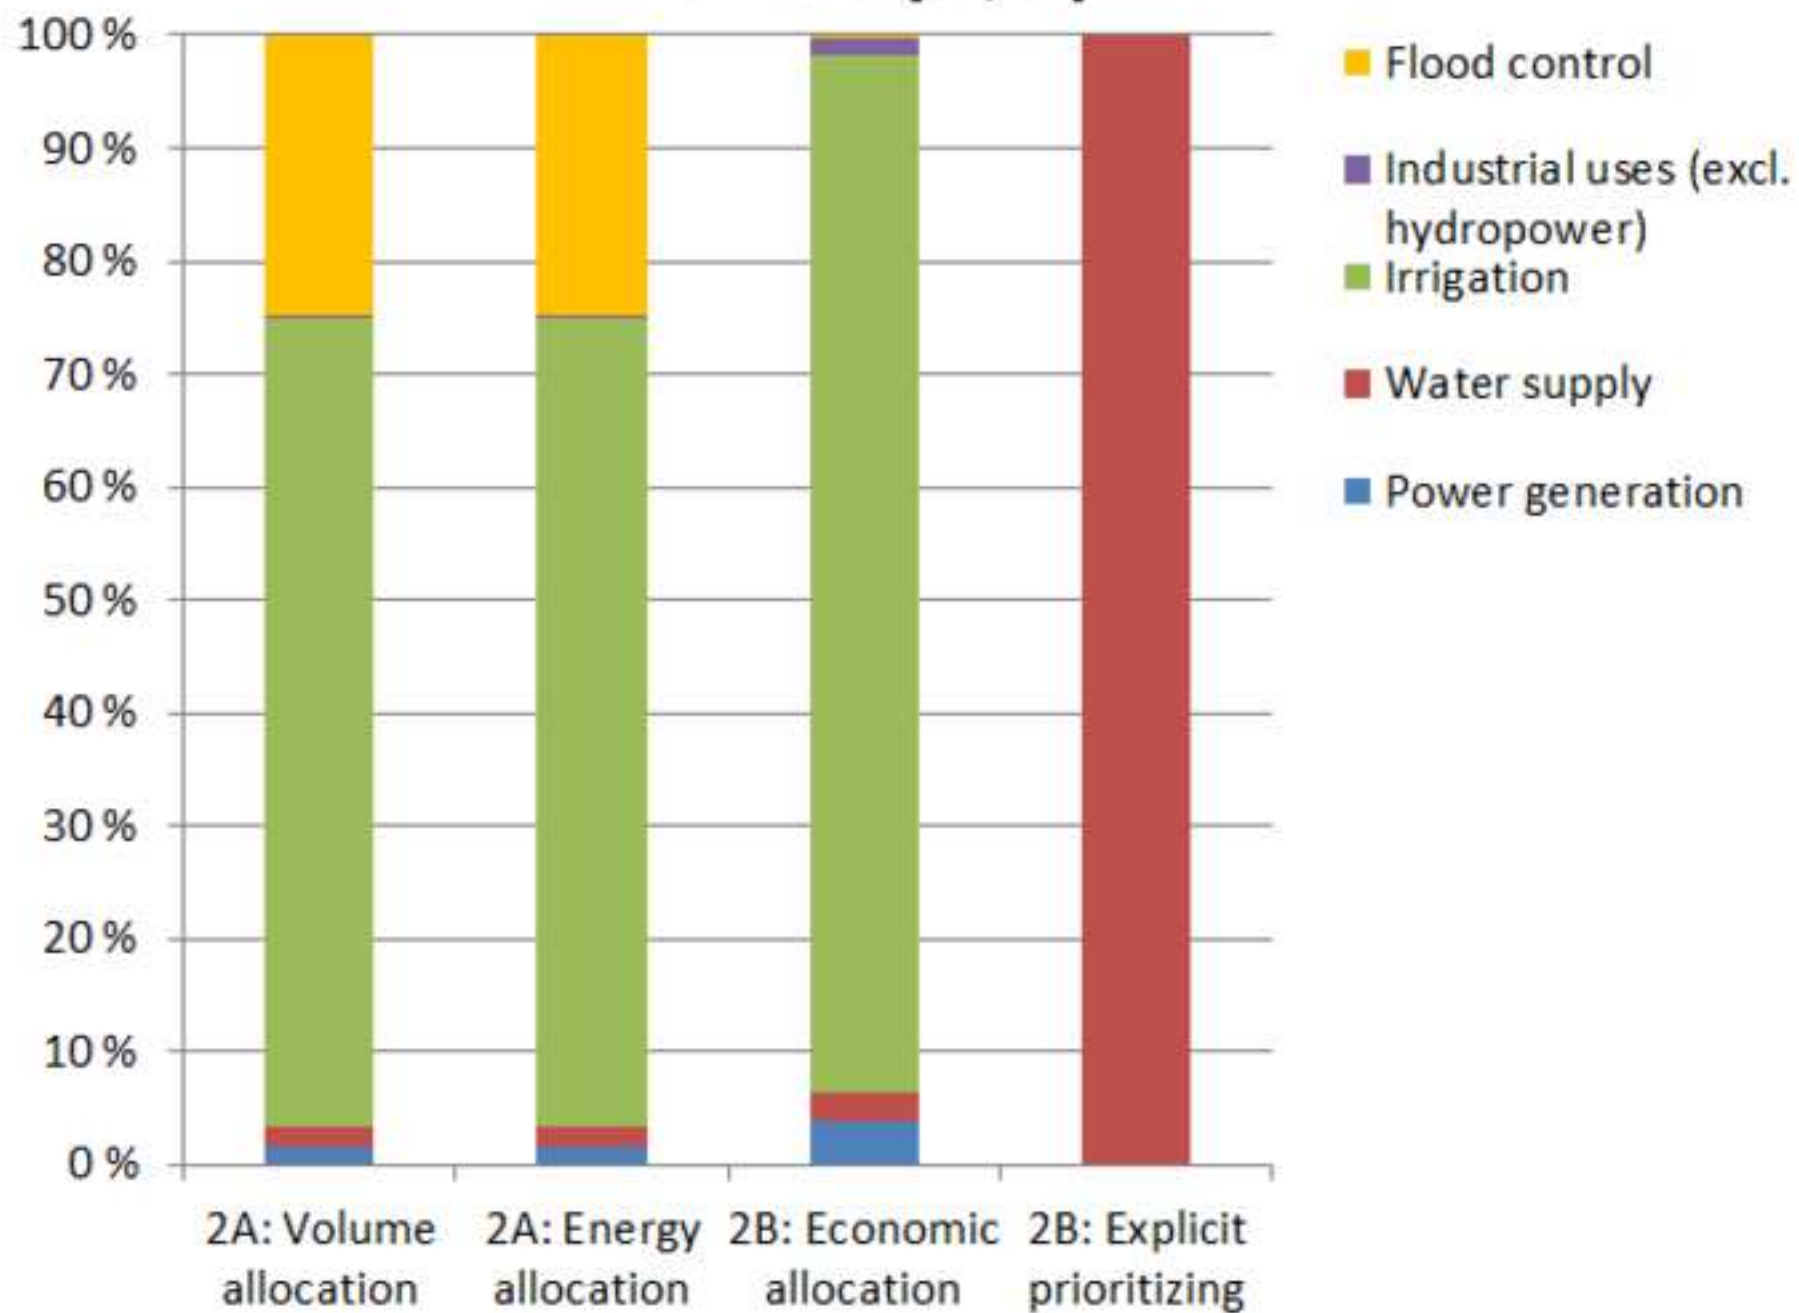

Aswan High Dam, Egypt

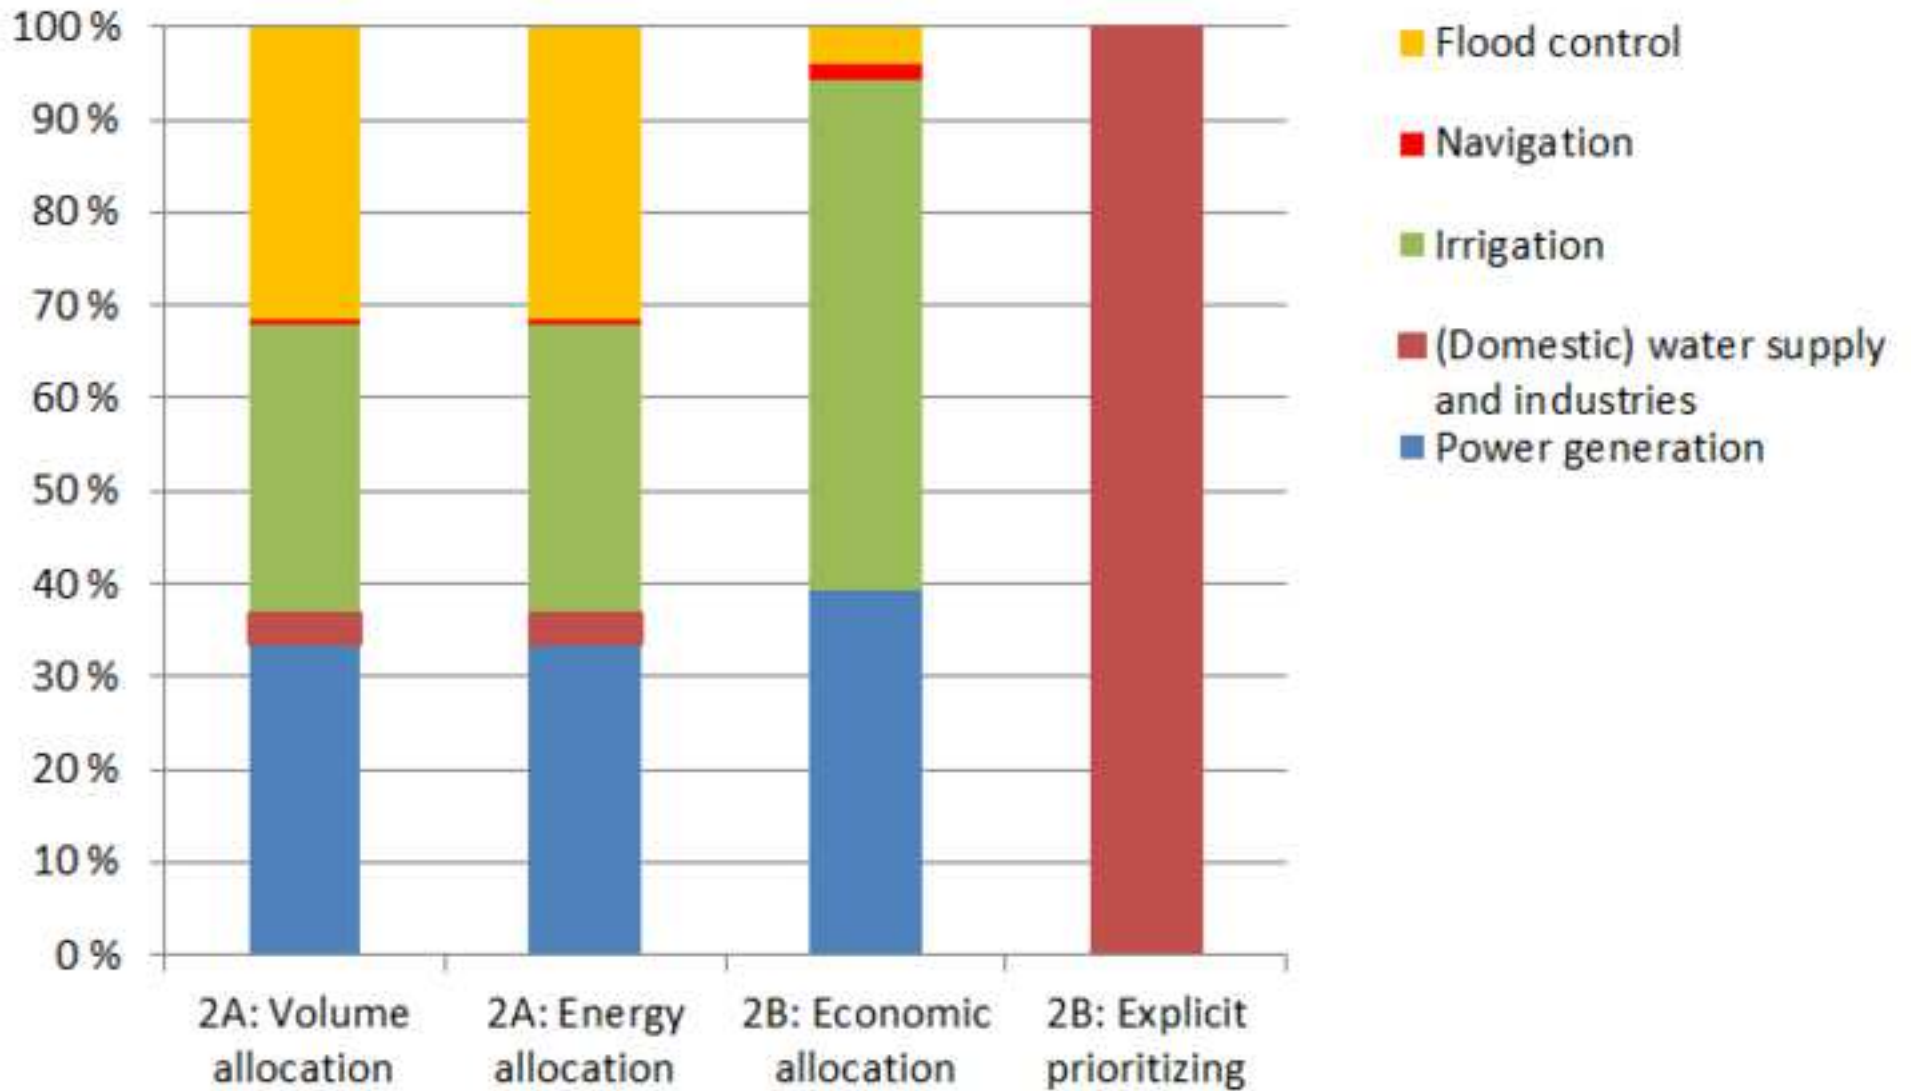

Porma, Spain

