

OMAE2019-95429

VALIDATION OF NUMERICAL MODELS OF THE OFFSHORE WIND TURBINE FROM THE ALPHA VENTUS WIND FARM AGAINST FULL-SCALE MEASUREMENTS WITHIN OC5 PHASE III

Wojciech Popko,¹ Amy Robertson,² Jason Jonkman,² Fabian Wendt,² Philipp Thomas,¹ Kolja Müller,³ Matthias Kretschmer,³
Torbjørn Ruud Hagen,⁴ Christos Galinos,⁵ Jean-Baptiste Le Dreff,⁶ Philippe Gilbert,⁷ Bertrand Auriac,⁸ Sho Oh,⁹
Jacob Qvist,¹⁰ Stian Høegh Sørum,¹¹ Loup Suja-Thauvin,¹² Hyunkyoung Shin,¹³ Climent Molins,¹⁴ Pau Trubat,¹⁴ Paul Bonnet,¹⁵
Roger Bergua,¹⁶ Kai Wang,¹⁶ Pengcheng Fu,¹⁷ Jifeng Cai,¹⁷ Zhisong Cai,¹⁷ Armando Alexandre,¹⁸ Robert Harries¹⁸

¹Fraunhofer IWES, Fraunhofer Institute for Wind Energy Systems, Division Wind Turbine and System Technology, Bremerhaven, Germany
wojciech.popko@iwes.fraunhofer.de

²National Renewable Energy Laboratory, Golden, CO, USA, ³University of Stuttgart, Stuttgart Wind Energy, Stuttgart, Germany,

⁴OWEC Tower AS, Oslo, Norway, ⁵Technical University of Denmark, Department of Wind Energy, Roskilde, Denmark

⁶Electricité de France, Recherche et Développement, Palaiseau, France, ⁷IFP Energies Nouvelles, Solaize, France,

⁸Principia, La Ciotat, France, ⁹Nippon Kaiji Kyokai (ClassNK), Tokyo, Japan, ¹⁰Subsea, Hvalstad, Norway,

¹¹Norwegian University of Science and Technology, Department of Marine Technology, Trondheim, Norway, ¹²Simis AS, Trondheim, Norway,

¹³University of Ulsan, School of Naval Architecture and Ocean Engineering, Ulsan, The Republic of Korea,

¹⁴Polytechnic University of Catalonia, Barcelona, Spain, ¹⁵Siemens Industry Software, Cornellà de Llobregat, Spain,

¹⁶Envision Energy Limited, Shanghai, China, ¹⁷China General Certification Center, Beijing, China, ¹⁸DNV GL, Bristol, The United Kingdom

ABSTRACT

The main objective of the Offshore Code Comparison Collaboration Continuation, with Correlation (OC5) project is validation of aero-hydro-servo-elastic simulation tools for offshore wind turbines (OWTs) through comparison of simulated results to the response data of physical systems. Phase III of the OC5 project validates OWT models against the measurements recorded on a Senvion 5M wind turbine supported by the OWEC Quattropod from the alpha ventus offshore wind farm. The following operating conditions of the wind turbine were chosen for the validation: (1) Idling below the cut-in wind speed; (2) Rotor-nacelle assembly (RNA) rotation maneuver below the cut-in wind speed; (3) Power production below and above the rated wind speed; and (4) Shutdown. A number of validation load cases were defined based on these operating conditions. The following measurements were used for validation: (1) Strains and accelerations recorded on the support structure; (2) Pitch,

yaw, and azimuth angles, generator speed, and electrical power recorded from the RNA. Strains were not directly available from the majority of the OWT simulation tools. Therefore, strains were calculated based on out-of-plane bending moments, axial forces, and cross-sectional properties of the structural members. Also, a number of issues arose during the validation: (1) The need for a thorough quality check of sensor measurements; (2) The sensitivity of the turbine loads to the controller and airfoil properties, which were only approximated in the modeling approach; (3) The importance of estimating and applying an appropriate damping value for the structure; and (4) The importance of wind characteristics beyond turbulence on the loads. The simulation results and measurements were compared in terms of time series, discrete Fourier transforms, power spectral densities, probability density functions of strains and accelerometers. A good match was achieved between the measurements and models set up by OC5 Phase III participants.

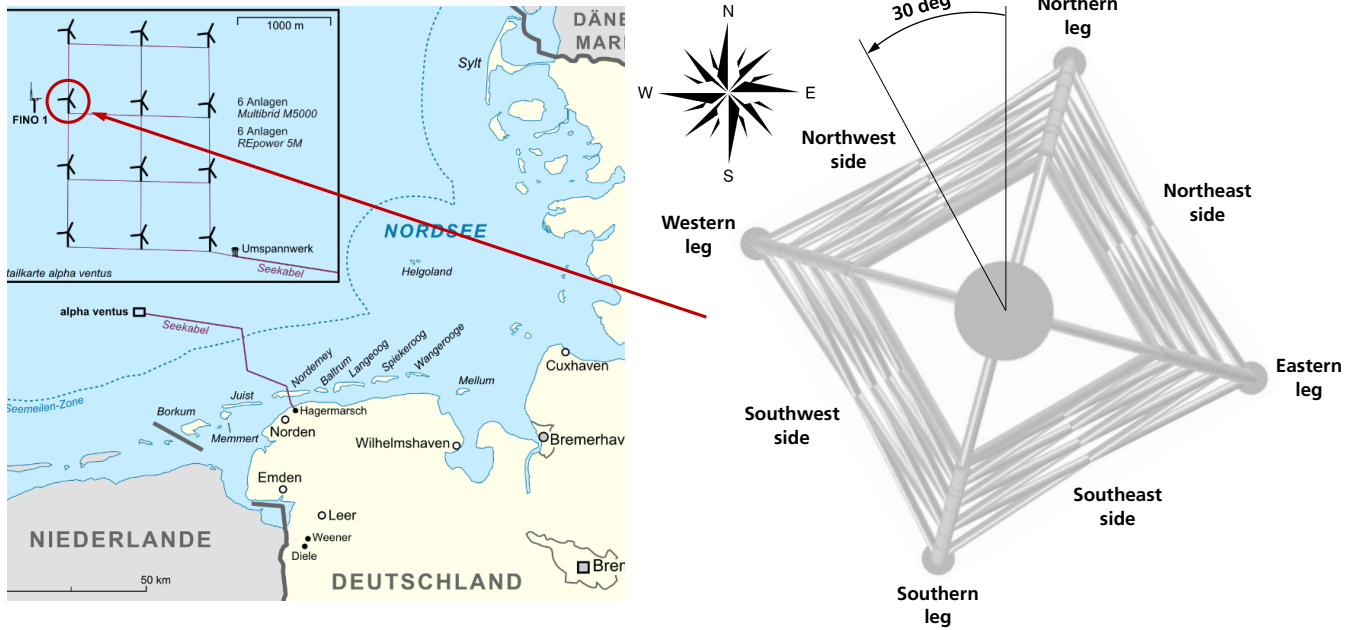


FIGURE 1: LEFT: LOCATION OF THE OWT WITHIN THE ALPHA VENTUS WIND FARM—MODIFIED SKETCH FROM [1]; RIGHT: JACKET ORIENTATION W.R.T. TRUE NORTH—VIEW FROM THE TOP.

INTRODUCTION

The Offshore Code Comparison Collaboration Continuation, with Correlation (OC5) project [2], which operates under the International Energy Agency (IEA) Wind Task 30 is the follow-up project of OC3 and OC4, which ran from 2005 to 2009 and from 2010 to 2014, respectively. The focus of OC3 and OC4 was to verify and benchmark simulation tools for offshore wind turbines (OWTs) with an emphasis on support structures through code-to-code comparison. This verification work led to improvements in model accuracy, which is a crucial achievement as the advancement of the offshore wind industry is closely tied to the development and accuracy of aero-servo-hydro-elastic OWT models [3, 4]. Participants of OC3 and OC4 expressed great interest in creating an extension to IEA Task 30 to focus on validating offshore wind modeling tools against experimental and in-situ data.

The OC5 project was focused on validation of aero-hydro-servo-elastic simulation tools for OWTs through comparison of simulated results to the response data of physical systems. OC5 was organized in three phases jointly coordinated by the National Renewable Energy Laboratory (NREL) from the USA and the Fraunhofer Institute for Wind Energy Systems IWES (IWES) from Germany. While the first two phases dealt with physical response data from tank tests [5, 6], Phase III dealt with the full-scale open-ocean system. Phase III of the OC5 project analyzed the Senvion 5M wind turbine supported by the OWEC Quattropod from the alpha ventus offshore wind farm. The reference

met-ocean and structural measurements were provided by the Research at Alpha Ventus (RAVE) consortium for model validation. Alpha ventus is located in the North Sea at the site of the average water depth of 28 m, around 45 km north of the Borkum island, as shown in Fig. 1.

The validation results discussed in this paper represent the outcome of several modeling iterations. Within each modeling iteration, the participants updated their simulation settings to better match the measurements. It should be noted that prior to the validation, all numerical OWT models were verified to fix modeling errors. Their verification was published in a separate paper by Popko et al. [7]. The models were not calibrated to the data after the verification step.

A number of academic and industrial project partners from 11 countries participated in the task. Those actively involved in Phase III are listed in Tab. 1.

A set of state-of-the-art simulation tools for OWT modeling is represented in Phase III of the OC5 project. Table 2 summarizes some of their simulation capabilities that are important for validation of OWT models in Phase III.

DEFINITION OF OFFSHORE WIND TURBINE MODEL

A description of the numerical model of the OWT consisting of the rotor-nacelle assembly (RNA), the tower, the transition piece (TP), the jacket substructure (OWEC Quattropod), its foundation piles, and soil properties was set up at Fraunhofer IWES

TABLE 1: PARTICIPANTS OF OC5 PHASE III AND THEIR TOOLS.

Organization full name	Abbreviation	Country	Tool
4Subsea, Simis AS	4S-Simis	Norway	ASHES
China General Certification Center	CGC	China	Bladed V4.8
Nippon Kaiji Kyokai	ClassNK	Japan	NK-UTWind
Technical University of Denmark – Department of Wind Energy	DTU	Denmark	HAWC2
DNV GL	DNVGL	UK	Bladed V4.8
Electricité de France – Recherche et Développement	EDFRD	France	FAST V8, DIEGO
Envision Energy Limited	Envision	China	SAMCEF Wind Turbines 18.0 (SWT)
IFP Energies Nouvelles, PRINCIPIA	IFPEN-PR	France	DeepLinesWind V5R4
Fraunhofer IWES – Division Wind Turbine and System Technology	IWES	Germany	MoWiT
National Renewable Energy Laboratory	NREL	USA	OpenFAST v0.1.0
Norwegian University of Science and Technology – Department of Marine Technology	NTNU	Norway	SIMA
OWEC Tower	OWEC	Norway	–
Senvion	Senvion	Germany	–
Siemens Industry Software	SIS	Spain	SAMCEF Wind Turbines 18.0 (SWT)
University of Stuttgart – Stuttgart Wind Energy	SWE	Germany	Simpack
University of Ulsan – School of Naval Architecture and Ocean Engineering	UOU	The Republic of Korea	FAST V8
Polytechnic University of Catalonia	UPC	Spain	FloaWDyn

by Popko [8] based on the data provided by Senvion and OWEC Tower. The complexity of the OWT models was proven adequate for this validation task [7]. On the other hand, the models were relatively simple (load analysis level) to minimize the implementation effort and modeling errors in the simulation tools.

The verification (code-to-code comparison) and tuning of those models, prior to their validation, was performed against a reference OWT model implemented in Flex5-Poseidon by the University of Stuttgart—Stuttgart Wind Energy (SWE), and documentation provided by Senvion and OWEC Tower. The reference OWT model from SWE contains structural and aerodynamic properties of the real blades, and the fully functional controller (torque, pitch, yaw, etc.) that could not be disclosed to the OC5 Phase III participants. The SWE reference model was extensively validated by Kaufer [9] and Müller [10] within the RAVE projects—Offshore-Windenergieanlagen (OWEA), and OWEA Loads [11], respectively. Therefore, it was also considered as a reference model for the verification of other numerical models prior to their validation in Phase III. The verification results of the models, which are used in the validation exercise presented in this paper, were published in a separate paper by Popko et al. [7].

ALPHA VENTUS MEASUREMENTS FOR VALIDATION

The reference measurements at different operating conditions were selected by SWE considering the following constraints: (1) The met-ocean conditions and the structural measurements had to be available for the same time window; (2) The data from the majority of the strain gauges and accelerometers, which are located at the critical positions for capturing the global system response, should be available; (3) The wind turbine should experience free-flow conditions—no wake effect from other wind turbines in the wind farm; and (4) The measurements should be 10 minutes long and leave sufficient time in between the adjacent measurements.

The measurement time period between April 2011 and January 2012 was used for screening, as during that time the majority of sensors operated correctly. The above baseline filtration constraints were applied to identify data regions that met the following conditions:

- Idling below the cut-in wind speed.
- Idling below the cut-in wind speed and the RNA rotation maneuver.
- Power production below the rated wind speed.
- Power production above the rated wind speed.
- Power production above the rated wind speed, followed by the normal shut-down.

The following 10-minute structural measurements, sampled with 50 Hz, were available for the validation purposes:

- Blade pitch angle and azimuth position, expressed in deg.
- Yaw position w.r.t. true north, expressed in deg.
- Generator speed, expressed in rpm.
- Electrical power, expressed in kW.
- Accelerations at the tower top and bottom, expressed in m/s^2 .
- Bending moments at the tower bottom, expressed in kNm.
- Uncalibrated strains at different positions along the jacket substructure, expressed in $\mu m/m$.

The location of the strain gauges along the jacket substructure is shown in Fig. 2. There are four sensors for each measurement location. They are positioned around the circumferences of the legs and braces. Each sensor is effectively one strain gauge composed of four resistances creating a full-bridge configuration. The full-bridge configuration helps to increase the output signal and optimizes compensation of temperature and mechanical noise impacts. For validation purposes a single strain gauge is selected from a given location.

The following met-ocean conditions were available in terms of their statistics (mean, minimum, maximum, and standard deviation values):

- Wind speed at the hub height, expressed in m/s.
- Wind direction w.r.t. true north, expressed in deg.

TABLE 2: OVERVIEW OF SIMULATION CAPABILITIES OF TOOLS USED WITHIN OC5 PHASE III.

Tool	Structural	Aerodynamics	Hydrodynamics	Control
ASHES	Structural dynamics: FEM Beam model: Euler-Bernoulli Damping model: Stiffness proportional Rayleigh	Basic aerodynamics: BEM + Glauert correction + Prandtl tip and root losses + skew inflow correction Dynamic wake model: \emptyset ye Dynamic stall model: \emptyset ye Wind field grid format: Rectangular	Regular wave model: Airy ^{str} Irregular wave model: JONSWAP/PM Hydro model: ME	DLL, UD
Bladed V4.8	Structural dynamics: MBS + flexible modally reduced bodies Beam model: Timoshenko Damping model: Modal	Basic aerodynamics: BEM + Glauert correction + Prandtl tip and root losses + skew inflow correction Dynamic wake model: \emptyset ye or Pitt and Peters Dynamic stall model: Beddoes-Leishman or \emptyset ye Wind field grid format: Rectangular	Regular wave model: Airy ^{str} , Stream Irregular wave model: JONSWAP/PM Hydro model: ME + MF	DLL, UD
DeepLinesWind V5R4 (DeepLW)	Structural dynamics: FEM Beam model: Mindlin-Reissner Damping model: Stiffness proportional Rayleigh	Basic aerodynamics: BEM + Glauert correction + Prandtl tip and root losses + skew inflow correction + relaxation of induction factors Dynamic wake model: \emptyset ye Dynamic stall model: \emptyset ye or Risø Wind field grid format: Rectangular	Regular wave model: Airy ^{str} , Stream Irregular wave model: JONSWAP/PM Hydro model: ME	DLL, UD
DIEGO	Structural dynamics: FEM Beam model: Euler-Bernoulli Damping model: Stiffness and mass proportional Rayleigh	Basic aerodynamics: BEM + Glauert correction + Prandtl tip and root losses Dynamic wake model: Pitt and Peters Dynamic stall model: Beddoes-Leishman or Risø Wind field grid format: Rectangular	Regular wave model: Airy ^{str} , Stokes Irregular wave model: JONSWAP/PM Hydro model: ME + MF	DLL
FAST V8 / OpenFAST v0.1.0	Structural dynamics: Substructure: FEM + Craig-Bampton; Turbine: FEM preprocessor + Modal/MBS; Blades: Modal Beam model: Substructure and blades: Timoshenko; Turbine: Euler-Bernoulli Damping model: Modal	Basic aerodynamics: BEM + Glauert correction + Prandtl tip and root losses Dynamic wake model: Pitt and Peters Dynamic stall model: Beddoes-Leishman Wind field grid format: Rectangular	Regular wave model: Airy ^{str} , Stokes 2nd order Irregular wave model: JONSWAP/PM Hydro models: ME	DLL, UD
FloaWDyn	Structural dynamics: FEM (co-rotational formulation) Beam model: Euler-Bernoulli Damping model: Support structure: stiffness and mass proportional Rayleigh	Basic aerodynamics: BEM (AeroDyn) + Glauert correction + Prandtl tip and root losses Dynamic wake model: Peters-He dynamic inflow Dynamic stall model: Beddoes-Leishman Wind field grid format: Single point wind at hub height	Regular wave model: Airy ^{str} , Stokes 5th order Irregular wave model: JONSWAP/PM Hydro model: ME	DLL, UD
HAWC2	Structural dynamics: MBS/FEM Beam model: Timoshenko Damping model: Support structure and blades: stiffness proportional Rayleigh	Basic aerodynamics: BEM with Madsen and Larsen correction for shear and dynamic inflow, Glauert and Coleman modification for skewed inflow Dynamic wake model: \emptyset ye Dynamic stall model: \emptyset ye or Beddoes-Leishman Wind field grid format: Rectangular	Regular wave model: Airy ^{str} Irregular wave model: JONSWAP/PM Hydro model: ME	DLL
NK-UTWind	Structural dynamics: FEM Beam model: Euler-Bernoulli Damping model: Support structure: stiffness proportional Rayleigh; Blades: modal	Basic aerodynamics: BEM (AeroDyn v14) Dynamic wake model: Pitt and Peters Dynamic stall model: Beddoes-Leishman Wind field grid format: Rectangular	Regular wave model: Airy ^{str} Irregular wave model: JONSWAP/PM Hydro model: ME	DLL
MoWiT	Structural dynamics: Support structure: FEM; Blades: MBS + modal reduced bodies Beam model: Support structure: Timoshenko Damping model: Support structure: stiffness and mass proportional Rayleigh; Blades: modal	Basic aerodynamics: BEM + Glauert correction + Prandtl tip and root losses + skew inflow correction + relaxation of induction factors Dynamic wake model: \emptyset ye Dynamic stall model: \emptyset ye or Beddoes-Leishman Wind field grid format: Rectangular	Regular wave model: Airy ^{str} , Stokes 5th order Irregular wave model: JONSWAP/PM Hydro model: ME + MF	DLL
SAMCEF Wind Turbines 18.0 (SWT)	Structural dynamics: FEM/MBS/Modal (Craig-Bampton) Beam model: Timoshenko Damping model: Support structure: stiffness proportional Rayleigh; Blades: modal	Basic aerodynamics: BEM + Glauert correction + Prandtl tip and root losses + skew inflow correction + relaxation of induction factors Dynamic wake model: \emptyset ye Dynamic stall model: Beddoes-Leishman Wind field grid format: Rectangular or polar	Regular wave model: Airy ^{str} , Stokes 5th order Irregular wave model: JONSWAP/PM Hydro model: ME + MF	DLL, UD
SIMA	Structural dynamics: FEM Beam model: Euler-Bernoulli with shear correction Damping model: Stiffness and mass proportional Rayleigh	Basic aerodynamics: BEM + Glauert correction + Prandtl tip and root losses + skew inflow correction Dynamic wake model: \emptyset ye Dynamic stall model: \emptyset ye Wind field grid format: Rectangular	Regular wave model: Airy ^{str} , Stokes 5th order Irregular wave model: JONSWAP/PM Hydro model: ME + MF	DLL, UD
Simpack	Structural dynamics: MBS, linear/nonlinear modal reduced FEM Beam model: Euler-Bernoulli, Timoshenko, nonlinear Damping model: Modal, Rayleigh	Basic aerodynamics: BEM (Aerodyn v15) + Glauert correction + Prandtl tip and root losses, Free Vortex Wake (ECN AeroModule) Dynamic wake model: Pitt and Peters Dynamic stall model: Beddoes-Leishman Wind field grid format: Rectangular	Regular wave model: Airy ^{str} Irregular wave model: JONSWAP/PM Hydro model: ME + MF	DLL, UD

Airy^{str} – linear Airy wave theory with Wheeler stretching
BEM – blade element momentum
DLL – dynamic-link library
FEM – finite element method

JONSWAP – deep-water wave spectrum
ME – semi-empirical Morison's equation
MF – MacCamy-Fuchs linear diffraction theory
PM – Pierson-Moskowitz spectrum

Stokes – nonlinear Stokes wave theory
Stream – Dean' Stream function wave theory
UD – user-defined subroutine

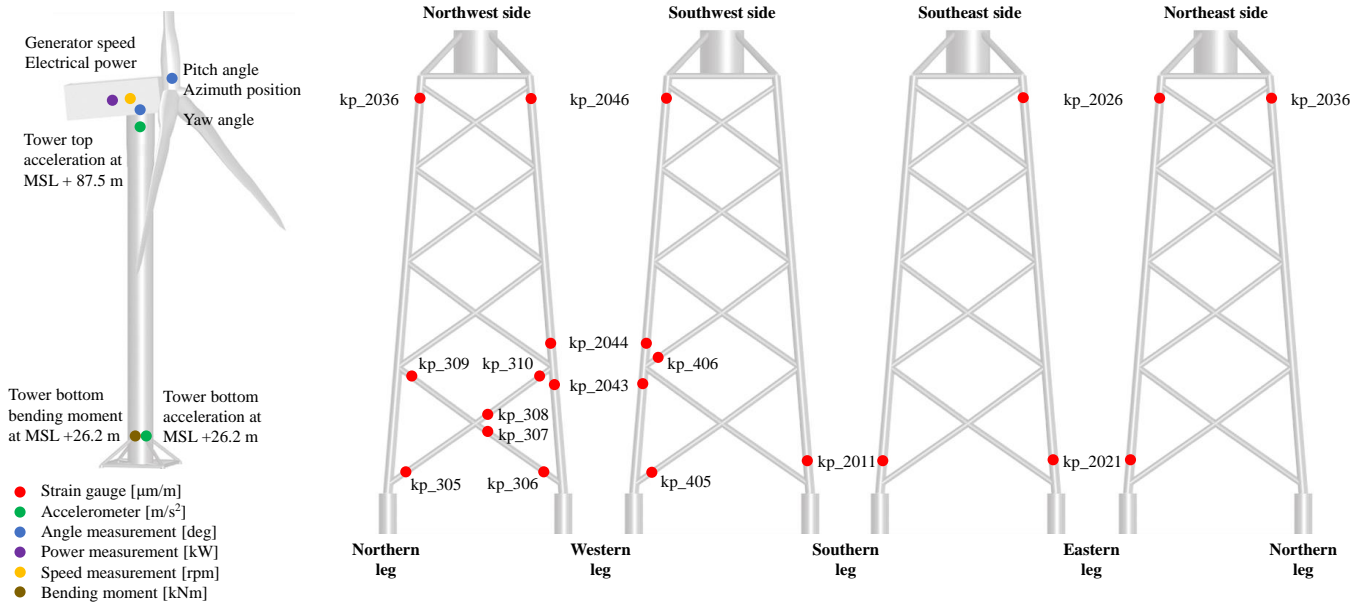


FIGURE 2: PLACEMENT OF SENSORS ALONG RNA, TOWER, AND JACKET SUBSTRUCTURE, WHICH WERE AVAILABLE FOR OC5 PHASE III.

- Significant wave height, expressed in m.
- Peak spectral wave period, expressed in s.
- Wave direction w.r.t. true north, expressed in deg.

The met-ocean conditions were not measured directly at the location of the OWT. The wind data were recorded at the FINO I platform and the wave data were recorded nearby the transformer station located in the southeast corner of the alpha ventus wind farm (see Fig. 1). The wind data were available in terms of 10-minute statistics, whereas the wave data were provided as a 3-hour statistic.

Other data not directly available from measurements

Some data were not directly available from the RAVE measurements or were difficult to derive. Therefore, it was necessary to assume their values based on the available standards or engineering practice of project participants:

- Inclination of the mean wind flow w.r.t. to a horizontal plane according to IEC 61400-3 [12].
- Air density according to IEC 61400-3 [12].
- Seawater density according to IEC 61400-3 [12].
- Marine growth vertical range, thickness, and density according to OWEC Tower documentation.
- Drag and inertia coefficients for jacket members covered with marine growth were derived from the SWE reference model implemented in Flex5-Poseidon.

VALIDATION METHODOLOGY

The postprocessing of all simulation results was performed internally at Fraunhofer IWES. The simulation results were compared against the measurements in terms of time series, discrete Fourier transforms (DFTs), power spectral densities (PSDs), and probability density functions (PDFs). Note that the DFT shows the amplitude spectrum of the signal, while the PSD describes how the power of the signal is distributed over frequency.

It should be noted that a direct comparison of the simulated and measured time series was not always possible due to: (1) The differences in the coordinate systems, in which the simulated time series were reported and in which the measurements were recorded; and (2) Output capabilities of the majority of simulation tools. Therefore, some signal processing was necessary before the data could be compared. The methodology for signals alignment and comparison is described in this section.

Coordinate systems

All simulation results were delivered by the project participants in terms of time series data. The time series of bending moments, forces, and accelerations were provided in the member local coordinate system, where the member x_{local} -axis is always aligned along the member centerline, z_{local} -axis is perpendicular to the x_{local} -axis and aligned according to the direction cosines for the z_{local} -axis, and y_{local} -axis creates the right-hand Cartesian coordinate system.

All strain and acceleration measurements were provided w.r.t. the local coordinate systems defined in [13]. These local

coordinate systems are not the same as those used for the simulation results. The alignment of these local coordinate systems was necessary and is described in the following paragraphs.

Wind, wave, and nacelle directions were specified w.r.t. to true north—for both—the measurements and simulations as shown in Fig. 1. Positive values indicate the clockwise direction when looking from the top.

Rotor speed and its azimuth position are defined as positive values when the rotor rotates in the clockwise direction when looking downwind. It is the same convention for the measurements and simulations.

Strain signals

Strain outputs are not directly available from the majority of the OWT simulation tools. Therefore, it was necessary to derive strain, ε , based on the simulated time series of the out-of-plane bending moments, $M_{y\text{local}}$, $M_{z\text{local}}$, axial force, $F_{x\text{local}}$, and geometrical properties of the circular cross section, such as the outer diameter and the wall thickness of the given member.

The relation between the stress, σ , and the bending moment, M , is defined as:

$$\sigma = \frac{M}{I}y \quad (1)$$

where I is the area moment of inertia for a hollow cylindrical cross section in m^4 and y is the distance to the neutral axis in m.

The relation between the stress, σ , and the strain, ε , is described as:

$$\sigma = E\varepsilon \quad (2)$$

where E is Young's modulus in N/m^2 .

Combining Eq. 1 with Eq. 2, adding the axial force contribution, and multiplying with 10^6 leads to strain expressed in $\mu\text{m}/\text{m}$:

$$\varepsilon = \left(\frac{My}{IE} + \frac{F_{x\text{local}}}{AE} \right) \cdot 10^6 \quad (3)$$

where $F_{x\text{local}}$ is the axial force in N and A is the cross-sectional area of the member in m^2 .

Furthermore, it was required to align these derived strains w.r.t. the circumferential positions of the strain gauges installed on the jacket substructure, as described by Eq. 4. An example of a local coordinate system (simulation tool) and a position of the strain gauge (real jacket) is shown for the node kp_2046 in Fig. 3.

$$M = M_{y\text{local}} \cos(\alpha) + M_{z\text{local}} \sin(\alpha) \quad (4)$$

where $M_{y\text{local}}$ and $M_{z\text{local}}$ are the out-of-plane bending moments in the member local coordinate system, expressed in Nm and α is the rotation angle to align with the strain gauge position, expressed in deg.

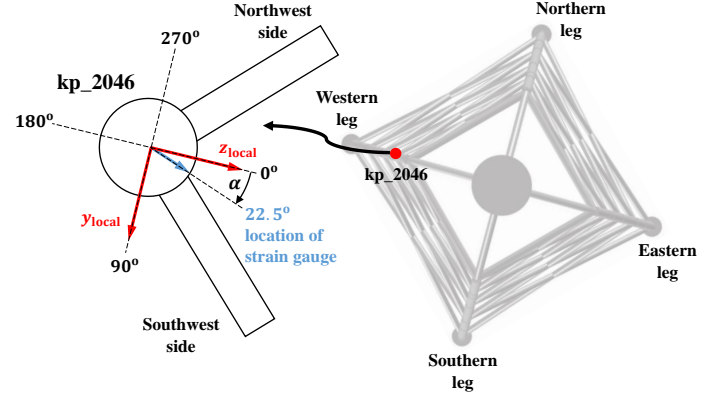


FIGURE 3: MEMBER LOCAL COORDINATE SYSTEM AT NODE KP_2046 (RED ARROWS), LOCATION OF THE STRAIN GAUGE INDICATED BY BLUE ARROW TIP.

The full-scale strain measurements in the jacket substructure were not calibrated. Therefore, it was necessary to remove the arithmetic mean, $\bar{\varepsilon}$, from the measured and computed strain time series, ε_i , before their comparison:

$$\varepsilon = \varepsilon_i - \bar{\varepsilon} \quad (5)$$

Some of the measured strain signals had a flipped sign. They were probably installed in the upside-down position. Their sign was corrected during the postprocessing.

Acceleration signals

The accelerometer data are available at the tower bottom and top in two perpendicular directions in the horizontal plane. The vector magnitude of acceleration was calculated from measured and computed acceleration time series according to the following Eq.:

$$|a| = \sqrt{a_{y\text{local}}^2 + a_{z\text{local}}^2} \quad (6)$$

Other signals

Other signals, such as electrical power, generator speed, yaw angle, pitch angle, and azimuth angle are compared directly between the measurements and the simulated data.

TABLE 3: OVERVIEW OF VALIDATION LOAD CASES IN OC5 PHASE III.

Load Case	OWT settings	Wind conditions	Marine conditions	Simulation settings
1.0 – Idling below cut-in wind speed	<ul style="list-style-type: none"> Free idling, rotor brake disabled $\phi_b = 0^\circ$ $\theta_p = 90^\circ$ $\theta_{yaw} = 26.8^\circ$ 	<ul style="list-style-type: none"> Steady, deterministic wind $V_{hub} = 3.61$ m/s $\theta_{wind} = 270^\circ$ $\alpha = 0.14$ 	<ul style="list-style-type: none"> Still water 	<ul style="list-style-type: none"> $T_{pre} =$ user defined $T_{sim} = 100$ s $\Delta t = 0.05$ s
1.1x – Idling below cut-in wind speed	<ul style="list-style-type: none"> Free idling, rotor brake disabled $\phi_b = 0^\circ$ $\theta_p = 90^\circ$ $\theta_{yaw} = 26.8^\circ$ 	<ul style="list-style-type: none"> Steady, deterministic wind $V_{hub} = 3.61$ m/s $\theta_{wind} = 270^\circ$ $\alpha = 0.14$ 	<ul style="list-style-type: none"> Irregular Airy with PM, 6 seeds $H_s = 0.89$ m $T_p = 9.88$ s $\theta_{wave} = 345.8^\circ$ 	<ul style="list-style-type: none"> $T_{pre} =$ user defined $T_{sim} = 600$ s $\Delta t = 0.05$ s
1.2 – Idling below cut-in wind speed, RNA rotation in counterclockwise direction	<ul style="list-style-type: none"> Free idling, rotor brake disabled $\phi_b = 0^\circ$ $\theta_p = 90^\circ$ $\theta_{yaw} = -0.28^\circ/s$ $\theta_{yaw,init} = 20^\circ$ $\theta_{yaw,final} = 58^\circ$ 	<ul style="list-style-type: none"> Steady, deterministic wind $V_{hub} = 3.61$ m/s $\theta_{wind} = 263.6^\circ$ $\alpha = 0.14$ 	<ul style="list-style-type: none"> Regular Airy wave $H = 0.57$ m $T = 10.65$ s $\theta_{wave} = 344.6^\circ$ 	<ul style="list-style-type: none"> $T_{pre} =$ user defined $T_{sim} = 1150$ s $\Delta t = 0.05$ s
2.1x – Power production below rated wind speed	<ul style="list-style-type: none"> Power production governed by external controller $\theta_p = 0^\circ$ $\theta_{yaw} = 267.5^\circ$ 	<ul style="list-style-type: none"> Stochastic wind field, Kaimal spectrum model, 6 seeds $V_{hub} = 7.9$ m/s $\sigma_{long} = 0.38$ m/s $\sigma_{lat} = 0.7 \sigma_{long}$ m/s $\sigma_{vert} = 0.5 \sigma_{long}$ m/s $\theta_{wind} = 255.9^\circ$ $\alpha = 0.14$ 	<ul style="list-style-type: none"> Irregular Airy with PM, 6 seeds $H_s = 2.55$ m $T_p = 6.57$ s $\theta_{wave} = 330.2^\circ$ 	<ul style="list-style-type: none"> $T_{pre} =$ user defined $T_{sim} = 600$ s $\Delta t = 0.05$ s
2.2x – Power production above rated wind speed	<ul style="list-style-type: none"> Power production governed by external controller $\theta_{yaw} = 235.5^\circ$ 	<ul style="list-style-type: none"> Stochastic wind field, Kaimal spectrum model, 6 seeds $V_{hub} = 16.57$ m/s $\sigma_{long} = 0.45$ m/s $\sigma_{lat} = 0.7 \sigma_{long}$ m/s $\sigma_{vert} = 0.5 \sigma_{long}$ m/s $\theta_{wind} = 218.3^\circ$ $\alpha = 0.28$ 	<ul style="list-style-type: none"> Irregular Airy with PM, 6 seeds $H_s = 1.60$ m $T_p = 6.26$ s $\theta_{wave} = 260.4^\circ$ 	<ul style="list-style-type: none"> $T_{pre} =$ user defined $T_{sim} = 600$ s $\Delta t = 0.05$ s
2.3x – Power production above rated wind speed	<ul style="list-style-type: none"> Power production governed by external controller $\theta_{yaw} = 254.3^\circ$ 	<ul style="list-style-type: none"> Stochastic wind field, Kaimal spectrum model, 6 seeds $V_{hub} = 18.98$ m/s $\sigma_{long} = 0.34$ m/s $\sigma_{lat} = 0.7 \sigma_{long}$ m/s $\sigma_{vert} = 0.5 \sigma_{long}$ m/s $\theta_{wind} = 231.6^\circ$ $\alpha = 0.36$ 	<ul style="list-style-type: none"> Irregular Airy with PM, 6 seeds $H_s = 1.34$ m $T_p = 5.84$ s $\theta_{wave} = 272.7^\circ$ 	<ul style="list-style-type: none"> $T_{pre} =$ user defined $T_{sim} = 600$ s $\Delta t = 0.05$ s
3.1x – Shutdown	<ul style="list-style-type: none"> Normal shutdown governed by external controller Shutdown triggered at $T_{shut-down}$ Generator torque drops linearly from the rated value to 0 Nm within 10 s $\dot{\theta}_p = 2.54^\circ/s$ $\theta_{yaw} = 268.3^\circ$ 	<ul style="list-style-type: none"> Stochastic wind field, Kaimal spectrum model, 6 seeds $V_{hub} = 14.12$ m/s $\sigma_{long} = 0.56$ m/s $\sigma_{lat} = 0.7 \sigma_{long}$ m/s $\sigma_{vert} = 0.5 \sigma_{long}$ m/s $\theta_{wind} = 247.4^\circ$ $\alpha = 0.14$ 	<ul style="list-style-type: none"> Irregular Airy with PM, 6 seeds $H_s = 1.51$ m $T_p = 6.82$ s $\theta_{wave} = 284.4^\circ$ 	<ul style="list-style-type: none"> $T_{pre} = 200$ s $T_{shut-down} = T_{pre} + 50$ s $T_{sim} = 600$ s $\Delta t = 0.05$ s

θ_p – blade pitch angle, 90° for blades pitched to feather

$\dot{\theta}_p$ – blade pitch rate, positive value toward feather

θ_{yaw} – yaw position w.r.t. true north

$\theta_{yaw,init}$ – initial yaw position w.r.t. true north

$\theta_{yaw,final}$ – final yaw position w.r.t. true north

$\dot{\theta}_{yaw}$ – yaw rate, negative value for counterclockwise rotation

θ_{wave} – wave mean direction w.r.t. true north

θ_{wind} – wind mean direction w.r.t. true north

σ_{long} – standard deviation of longitudinal wind component

σ_{lat} – standard deviation of lateral wind component

σ_{vert} – standard deviation of vertical wind component

ϕ_b – blade azimuth angle, 0° for first blade pointing upward

α – wind shear

Δt – output time step

x = a, b, c, d, e, f – six independent seeds for wind and sea state

PM – Pierson-Moskowitz spectrum

H – regular wave height

H_s – significant wave height

T – regular wave period

T_p – peak-spectral wave period

T_{pre} – presimulation time

$T_{shut-down}$ – shutdown trigger time

T_{sim} – simulation time

V_{hub} – mean wind speed at the hub height

VALIDATION LOAD CASES

The following operating conditions of the wind turbine were chosen for the validation: (1) Idling below the cut-in wind speed; (2) RNA rotation maneuver below the cut-in wind speed; (3) Power production below and above the rated wind speed; and (4) Power production followed by the shutdown. Seven validation load cases (LCs) were defined based on these operating con-

ditions. Their complexity increases, allowing for the stepwise comparison of results and tracing back possible errors coming from different models and methods implemented in the simulation tools. Table 3 lists all validation LCs that were simulated in Phase III.

The following settings were common for all LCs:

- Fully-flexible OWT models.

- Foundation stiffness was modeled, depending on the individual participant preferences:
 - By the apparent fixity method, where the OWT piles were fixed at 8.5 m below the seabed—4S-Simis (ASHES), DTU (HAWC2), EDFRD (DIEGO, FAST V8), Envision (SWT), IFPEN-PR (DeepLW), IWES (MoWiT), NREL (OpenFAST v0.1.0), SWE (Simpack), and UOU (FAST V8).
 - By applying p-y curves along the foundation piles extending to 42 m below the seabed—CGC, DNVGL (Bladed V4.8), ClassNK (NK-UTWind), NTNU (SIMA), and UPC (FloaWDyn).
- Static blade pitch error of -0.3 deg for blade 2 and +0.3 deg for blade 3 — 4S-Simis (ASHES), CGC, DNVGL (Bladed V4.8), DTU (HAWC2), EDFRD (DIEGO), Envision (SWT), IFPEN-PR (DeepLW), NREL (OpenFAST v0.1.0), NTNU (SIMA), SWE (Simpack), and UOU (FAST V8).
- Static blade mass imbalance for blade 2 by increasing the blade density over the entire blade by 0.6% — 4S-Simis (ASHES), CGC, DNVGL (Bladed V4.8), DTU (HAWC2), EDFRD (FAST V8, DIEGO), Envision (SWT), IFPEN-PR (DeepLW), NTNU (SIMA), SWE (Simpack), and UOU (FAST V8).
- The jacket substructure rotated 30° counterclockwise w.r.t. true north as shown in Fig.1.
- The jacket substructure legs were flooded up to the mean sea level of 28 m and the braces were sealed.
- Inclination of the mean wind flow w.r.t. a horizontal plane of 0°.
- Air density of 1.225 kg/m³.
- Seawater density of 1025 kg/m³.
- Mean sea level (MSL) of 28 m.
- No sea current.
- Marine growth applied.

In LC 1.0, the idling turbine below the cut-in wind speed was simulated. This LC was meant to check mean values and signs of the signals from different sensors from the measurements and the simulation results. In LC 1.1x, the idling turbine below the cut-in wind speed was simulated as in LC 1.0. The only difference between these two LCs was introduction of the stochastic sea state instead of the still water. This LC was meant to check the sensitivity of the numerical models to stochastic marine conditions. In LC 1.2, the yaw maneuver of the idling turbine below the cut-in wind speed was simulated.

In LCs 2.1x, 2.2x, and 2.3x the power production was simulated with the stochastic wind files and the stochastic sea state. LCs 2.1x simulate the power production below rated wind speed, while LCs 2.2x and 2.3x simulate the power production above rated wind speed.

In LC 3.1x, the power production above the rated wind speed followed by the normal shutdown was simulated with the stochastic wind files. This LC was meant for analysis of a transient event.

Turbulent wind fields were generated at NREL for LCs 2.X.x and 3.1x. Detailed input parameters for generation of wind fields with Kaimal spectrum by Veers method were specified by Popko [14]. It was decided to use six independent wind seeds (x = a, b, c, d, e, f), each 10 minutes long, for every single LC in order to get statistically comparable results as recommended in the IEC 61400-1 standard [15]. The stochastic wind files could also be generated individually by those participants, whose tools are not able to utilize the provided wind fields due to a different grid format.

For each LC, the outputs were recorded at a number of nodal points denoted as sensors located at the RNA, the tower, and the jacket substructure, as shown in Fig. 2. The location of these outputs corresponds to the location of physical sensors on the actual OWT.

Initial simulation transients were removed by using a pre-simulation time, T_{pre} , which is simulated but cut-out from the result files in all simulations. For the majority of LCs, T_{pre} was not explicitly defined. It was chosen individually by each participant in order to avoid initial numerical transients and to satisfy the initial conditions of the given LC. The time step for data output was defined as $\Delta t = 0.05$ s for all LCs.

SELECTED RESULTS

This section presents example results of the OWT models validation against the measurements from the Senvion 5M wind turbine and the jacket support structure from OWEC Tower from the alpha ventus wind farm.

Presented results give a general overview of differences between the measurements and the OC5 Phase III simulation results. The results discussed in this paper represent the final outcome of multiple modelling iterations that were necessary to develop numerical models of the OWT and validation LCs. During each modelling iteration, the participants updated their simulation settings to better match with the measurements.

RNA Rotation Maneuver

Figures 4 and 5 show time series of strains with a mean offset adjustment at kp_2036 and kp_307, which are placed at the top of the northern leg and at the lowest X-brace at the northwest jacket side, respectively. The exact locations of these sensors are shown in Fig. 2. The strain signal is changing sinusoidally during the RNA maneuver. The maneuver was simulated in LC 1.2 as described in Tab. 3.

The measurements are plotted with black curves and are denoted at the bottom of the plot legends as Event_2011-03-23. In

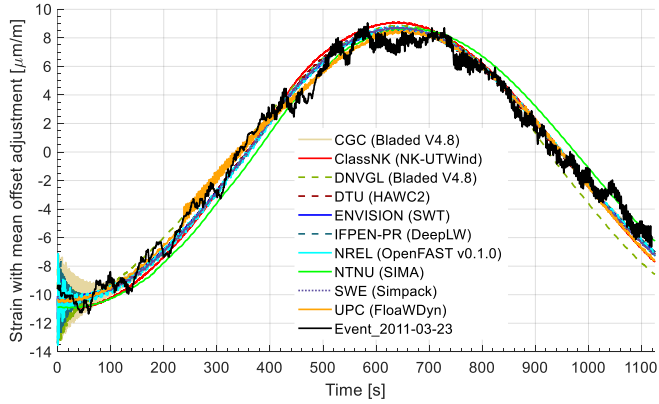


FIGURE 4: LC 1.2 – STRAIN TIME SERIES WITH MEAN OFFSET ADJUSTMENT AT KP_2036, TOP OF THE NORTHERN LEG.

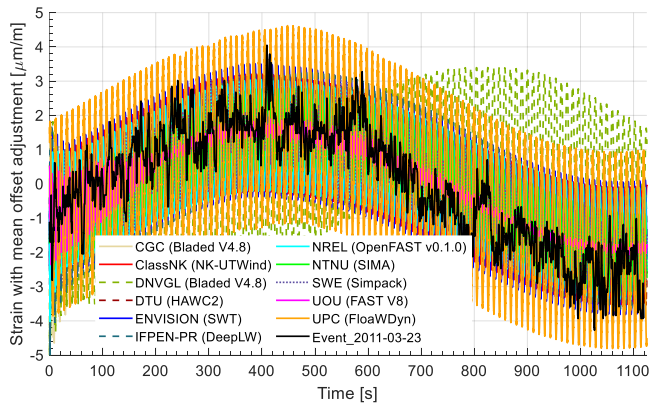


FIGURE 5: LC 1.2 – STRAIN TIME SERIES WITH MEAN OFFSET ADJUSTMENT AT KP_307, LOWEST X-BRACE AT NORTHWEST JACKET SIDE.

both Figs. there are some oscillations visible in the measurement signals. Their dominant frequency corresponds to the 1st global mode of the OWT at around 0.31 Hz. In the case of the measurements recorded at the kp_307 sensor at the lowest X-brace, there is also an additional frequency of around 0.9 Hz. This frequency corresponds to the torsional mode of the support structure. Some irregular peaks appear every 110 – 180 s in the measurements from the kp_2036 sensor at the top of the northern leg. They result from the superposition of two frequencies. The first frequency is induced by the yaw mechanism, which rotates the RNA with $2.54^\circ/\text{s}$ (0.007 Hz or 142 s), and the second frequency results from the slowly rotating rotor of the actual wind turbine with around 0.3 rpm (0.005 s Hz or 200 s). On the contrary to the measurements, in the majority of the simulation results the rotor speed was almost zero—it was standing still during the RNA rotation.

In general, the simulation results of the majority of the participants are very well aligned with the measurements. Their amplitudes and phases match the measurement. It should be noted that steady oscillations are present in the majority of the simulation results at the kp_307 sensor (Fig. 5). They are more pronounced than the oscillations visible in the measurements. These oscillations from the simulations are dominated by the tower torsional mode around 0.9 Hz or the 1st blade flapwise frequency, which is in the range from 0.58 to 0.65 Hz. These frequencies were triggered during the simulations due to the sudden start of the yaw maneuver. The project participants did not have access to the yaw mechanism definition neither to the real turbine controller and the yaw maneuver initialization procedure. Some transient oscillations are visible in the UOU (FAST V8) results the kp_307 sensor. However, they could be mitigated by extending the presimulation time. The DNVGL (Bladed V4.8) strain time series at the kp_307 sensor has a flipped sign associated with the incorrect definition of the output coordinate system.

Power Production Above Rated Wind Speed

Figures 6 and 7 show generator power and speed time series for LC 2.2e, respectively. The measurement time series are plotted with different gray shade curves. They come from eight events recorded between April 4 and April 6, 2011, when the met-ocean conditions were relatively comparable. A high variation of the measured generator power, compared to the simulation results, is observed. The standard deviation of generator power varies between 53 and 66 kW for different measurement events. For the simulation results, the standard deviation is one order of magnitude smaller and varies between 1 and 6 kW. Furthermore, a very significant high frequency content in the measured generator power, compared to the simulation results, is observed. The PSD analysis proved that the measured generator power has significantly more energy across a wide frequency range. Peaks around 2 Hz are not really visible in the measured data, but are clearly evident for simulations (not shown in this paper). This indicates that a low-pass filter was used in the actual Senvion controller. On the other hand, the measured generator speed has only a slightly smaller standard deviation compared to the simulation results. For the measurements it varies within the range of 1.61 to 2.62 rpm, whereas for the simulations it varies from 2.59 to 3.28 rpm. It can be concluded that the actual Senvion controller acts more aggressively on the generator torque to keep the generator speed constant.

It should be mentioned that a similar, aggressive torque control was also observed in the partial loading region in the measurements for LC 2.1.

Figures 8 and 9 show single-sided amplitude spectra from DFT of aggregated strain time series of six simulation seeds from LC 2.2 at kp_2026 (eastern leg top) and kp_2021 (eastern leg bottom), respectively. The exact locations of these sensors are

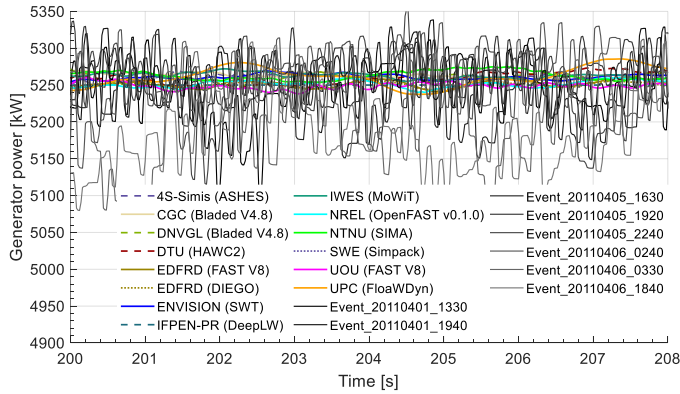


FIGURE 6: LC 2.2E – ZOOMED GENERATOR POWER TIME SERIES.

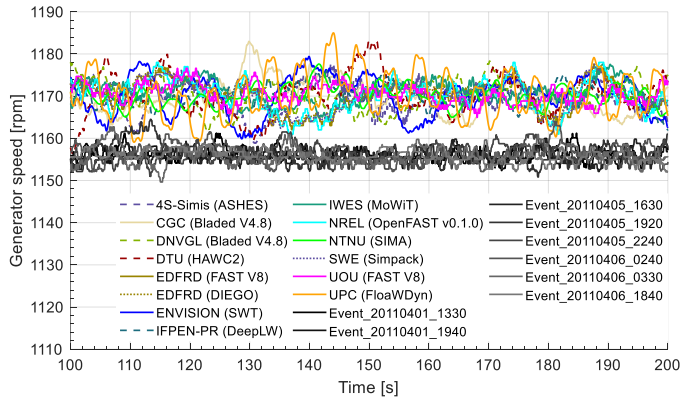


FIGURE 7: LC 2.2E – ZOOMED GENERATOR SPEED TIME SERIES.

shown in Fig. 2. Vertical dotted lines in both DFT figures indicate subsequent rotor harmonics (1P, 3P, 6P, and 9P) above the rated wind speed, V_r , and global eigenmodes that are also described with the vertical text. These dotted lines help to identify sources of frequency peaks.

The strain amplitude at the frequency corresponding to 1P (0.2 Hz) are significantly underpredicted by IWES (MoWiT) for both sensors—higher (kp_2026) and lower (kp_2021) location at the eastern leg. IWES did not use the blade mass imbalance and the static pitch error in its OWT model. On the other hand, a strong overprediction of the 1P (0.2 Hz) frequency is observed in case of NTNU (SIMA). This might be associated with the modeling approach utilized by NTNU.

The strain amplitude at the frequency corresponding to the 1st global mode (0.31 Hz) are significantly underpredicted by simulations for both sensors—higher (kp_2026) and lower (kp_2021) location at the eastern leg. The strain amplitude at the frequency dominated by 3P and the 1st flapwise mode (both around 0.6 Hz) is relatively well captured in the simulation re-

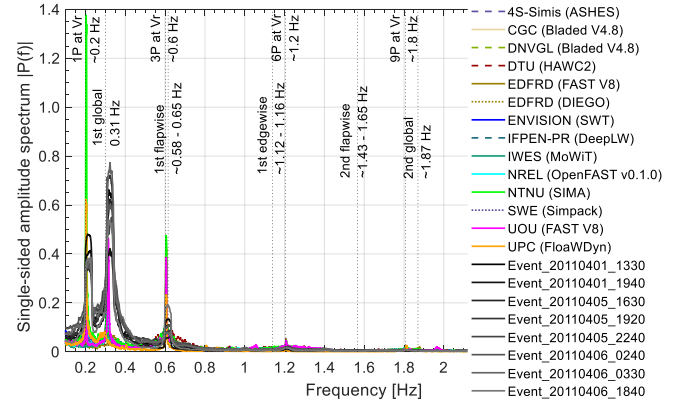


FIGURE 8: LC 2.2 – SINGLE-SIDED AMPLITUDE SPECTRUM FROM DFT OF AGGREGATED STRAIN TIME SERIES OF SIX SEEDS AT KP_2026, EASTERN LEG TOP.

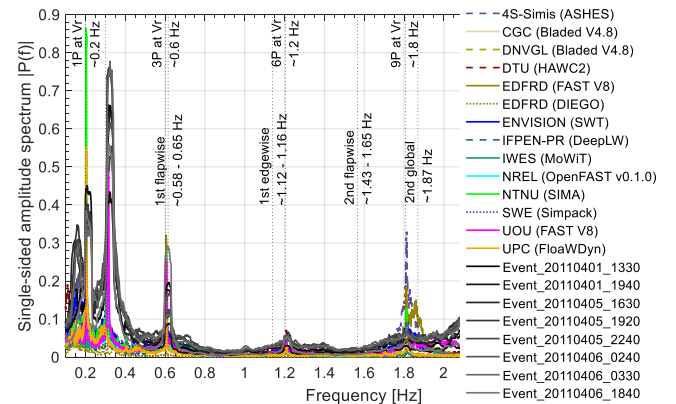


FIGURE 9: LC 2.2 – SINGLE-SIDED AMPLITUDE SPECTRUM FROM DFT OF AGGREGATED STRAIN TIME SERIES OF SIX SEEDS AT KP_2021, EASTERN LEG BOTTOM.

sults for both locations. The amplitudes at higher frequencies at around 1.8 Hz to 1.9 Hz are significantly overpredicted by simulations at kp_2021 at the bottom of the leg. For kp_2026 at the top of the leg this is not observed. There is a significant increase of amplitudes for the measurements at the frequencies above 2 Hz at kp_2021 at the bottom of the leg. This is not observed in the simulation results. All these observations also apply to LC 2.3.

In summary, the underprediction of amplitudes at the lower frequencies (up to 0.4 Hz) would indicate issues with the system damping. The damping values used in the numerical models might be too high. The estimation of an appropriate damping value for the structure is difficult without the measurements. The overprediction of simulated strain amplitudes at higher frequencies at around 1.9 Hz might be related to filters used in the controller.

Shutdown Transient Event

The power production followed by the normal shutdown was simulated according to LC 3.1x defined in Tab. 3. This LC was meant for the analysis of the transient behaviour of the OWT. The measurements are always plotted with black curves and denoted at the bottom of the plot legends as Event_20110401-01.

Figure 10 shows the time series of the pitch angle during the normal operation of the OWT just before the shutdown was triggered (45 to 50 s), during the shutdown (50 to 83 s), and just after (83 to 95 s). For the majority of the simulation results, the mean pitch angle is slightly larger than the measured one during the power production (45 to 50 s). This is caused by differences in blade aerodynamics between the tuned NREL 5-MW blades (utilized in OC5 Phase III) and the real Senvion 5M turbine, as explained by Popko [7]. The measured pitch angle during the shutdown increases linearly to 70° from 50 up to 76 s, afterward it is kept constant for around 4 s, and then continues pitching to feather with a slightly higher rate. The reason for this intermediate stop in pitching in the measured signal is unknown. For the simulations it was decided to use the constant pitch action from 50 to 83 s until all blades are pitched to 90° . This is a reasonable simplification.

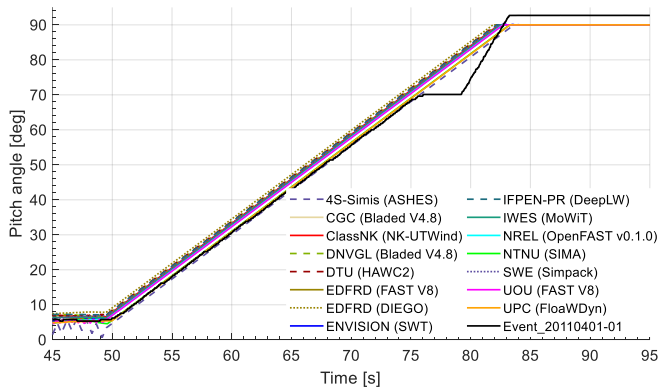


FIGURE 10: LC 3.1F – PITCH ANGLE TIME SERIES.

Figure 11 shows the generator power time series. The majority of the simulation results follow the measurement. The measured generator power drops nonlinearly from its rated value to 0 Nm within 10 s. For the simulation of OWT models, it was decided to implement a simplified linear drop of the generator torque. This simplification can be justified as it should not have a large impact on the loads in the jacket substructure.

Figure 12 shows the generator speed time series. The measured speed is always kept higher during the shutdown event compared to the simulation results. This is caused by differences in blade aerodynamics between the tuned NREL 5-MW blades (utilized in OC5 Phase III) and the real Senvion 5M turbine, and the control system.

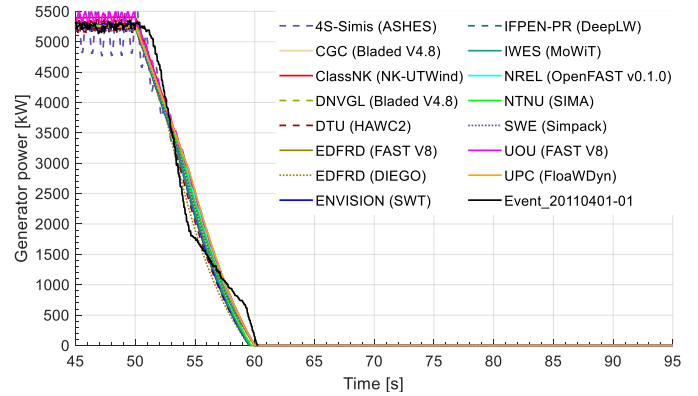


FIGURE 11: LC 3.1F – GENERATOR POWER TIME SERIES.

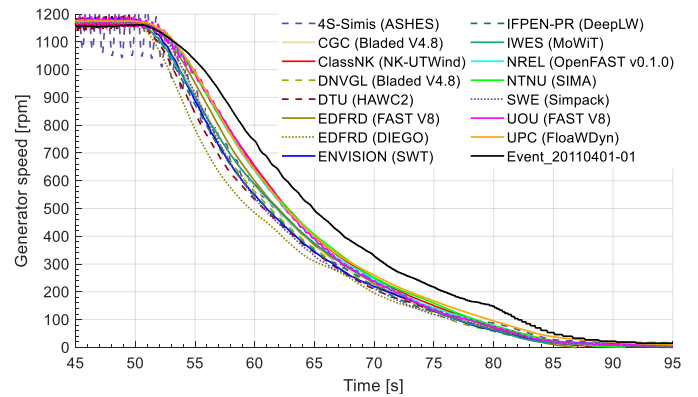


FIGURE 12: LC 3.1F – GENERATOR SPEED TIME SERIES.

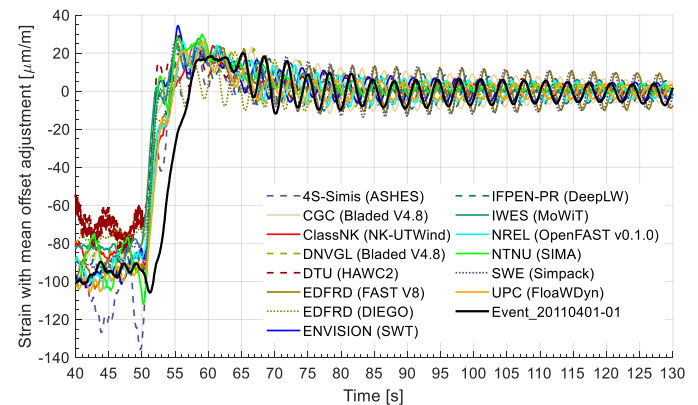


FIGURE 13: LC 3.1F – STRAIN TIME SERIES WITH MEAN OFFSET ADJUSTMENT AT KP_2026, TOP OF THE EASTERN LEG.

Figure 13 shows the time series of strain with mean offset adjustment during the shutdown event at the kp_{2026} sensor located at the top of the eastern leg (Fig. 2). Note that the

TABLE 4: PERCENTAGE OF CRITICAL DAMPING RATIO FOR MAIN OWT COMPONENTS MODELED BY DIFFERENT PHASE III PARTICIPANTS.

Participant	Tool	Jacket + piles	Tower	Blades	Drivetrain	Comments
UPC	FloaWDyn	0.16%	0.40%	no damping	rigid	Support structure: Stiffness and mass proportional Rayleigh ¹ , Blade: No damping
IWES	MoWiT	0.16%	1.24%	2%	5% (torsional)	Support structure: Stiffness and mass proportional Rayleigh, Blade: Modal (8 modes)
Envision	SWT	0.16%	0.40%	0.48%	4.77% (torsional)	Support structure: Stiffness proportional Rayleigh, Blade: Modal ²
NTNU	SIMA	0.16%	0.40%	0.23%	rigid	Support structure and blade: Stiffness proportional Rayleigh ³
4S-Simis	ASHES	0.16%	0.40%	no damping	flexible, no damping	Support structure: Stiffness proportional Rayleigh, Blade: No damping
ClassNK	NK-UTWind	1.24%	1.24%	0.48%	rigid	Support structure: Stiffness proportional Rayleigh, Blade: Modal (3 modes)
DTU	HAWC2	0.70%	0.40%	0.48%	rigid	Support structure and blade: Stiffness proportional Rayleigh
IFPEN-PR	DeepLW	no damping	0.40%	0.48%	rigid	Tower and blade: Stiffness proportional Rayleigh
CGC	Bladed V4.8	0.50%	0.50%	0.48%	4.77% (torsional)	Support structure and blade: Modal (16 support structure modes, 7 blade modes)
DNVGL	Bladed V4.8	1.24%	1.24%	0.26%	flexible	Support structure and blade: Modal (6 blade modes)
NREL	OpenFAST	1%	0.80%	0.48%	flexible	Support structure and blade: Modal (8 jacket modes, 4 tower modes, 3 blade modes)
UOU	FAST V8	1%	0.40%	0.48%	rigid	Support structure and blade: Modal (8 jacket modes, 4 tower modes, 3 blade modes)
EDFRD	FAST V8	0.16%	1.24%	0.48%	rigid	Support structure and blade: Modal (4 tower modes, 3 blade modes)
EDFRD	DIEGO	1.24%	1.24%	0.48%	rigid	Support structure and blade: Stiffness and mass proportional Rayleigh
SWE	Simpack	1%	0.40%	0.48%	rigid	Support structure and blade: Modal (8 jacket modes, 4 tower modes, 3 blade modes)

¹ In FloaWDyn model an equivalent Rayleigh method is applied in the co-rotational element axes. The damping matrix applied is a linear combination of the mass and stiffness matrixes acting over the co-rotational local deformation velocity.

² In SWT a percentage of critical damping can be specified for the blade modes that are derived through a Craig-Bampton (CB) reduction. The modal base for the blade is characterized based on a fixed-free boundary condition. This modally reduced blade (that contains the damping) is linked node by node to a non-reduced blade defined by means of non-linear beams (that contains the structural properties). Through this approach it is possible to superpose a modal damping to a non-linear beam able to capture the blade deflections accurately.

³ In SIMA, the damping is specified as Rayleigh proportional damping. This can be applied as both mass and stiffness proportional damping, but only stiffness proportional damping is used within the simulations in this paper. Separate damping coefficients can be specified for all structural elements. Here, damping coefficients have been set to give the damping levels in Table 4 at the frequency of the first global mode for the jacket and tower. For the blades, the damping is set to the specified level for the frequency corresponding to the first asymmetric flapwise yaw mode. For frequencies below the ones specified here, the damping level will be lower than given in Table 4. Correspondingly, the damping will be larger for the higher frequencies.

measurement signal has a smaller overshoot at around 60 s compared to the majority of the simulation results. The real turbine controller is able to efficiently mitigate loads resulting from the shutdown.

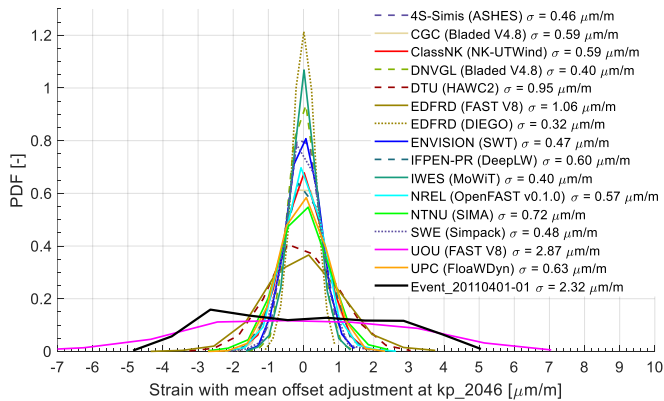


FIGURE 14: LC 3.1 – PDF OF AGGREGATED STRAIN TIME SERIES OF SIX SEEDS AT KP_2046 AT THE TOP OF WESTERN LEG, CALCULATED FROM THE LAST 300 S OF SIMULATION.

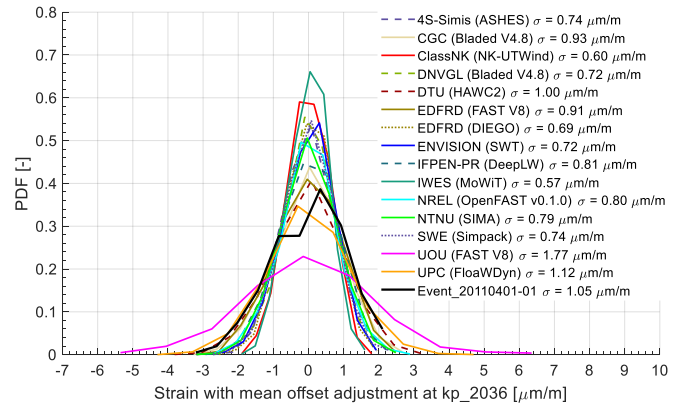


FIGURE 15: LC 3.1 – PDF OF AGGREGATED STRAIN TIME SERIES OF SIX SEEDS AT KP_2036 AT THE TOP OF NORTHERN LEG, CALCULATED FROM THE LAST 300 S OF SIMULATION.

Figures 14, 15, 16, and 17 show PDFs of strain at the western (kp_2046), northern (kp_2036), eastern (kp_2026), and the southern (kp_2011) leg, respectively. All PDFs were calculated based on the last 300 s of the 600 s time series. This was done to analyze damping of the entire OWT. Standard deviations for

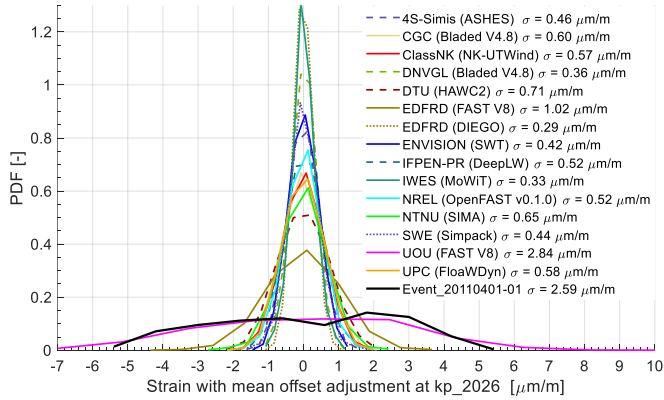


FIGURE 16: LC 3.1 – PDF OF AGGREGATED STRAIN TIME SERIES OF SIX SEEDS AT KP_2026 AT THE TOP OF EASTERN LEG, CALCULATED FROM THE LAST 300 S OF SIMULATION.

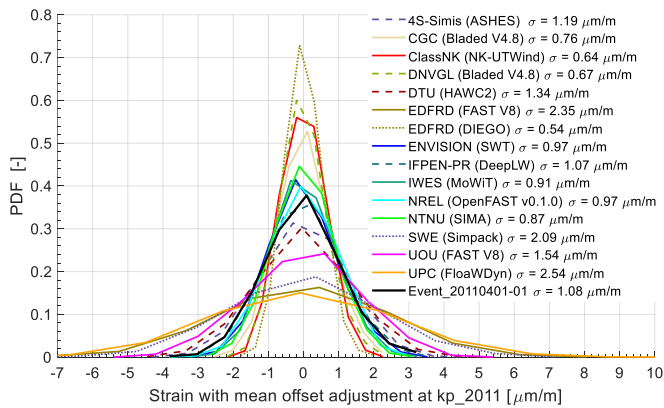


FIGURE 17: LC 3.1 – PDF OF AGGREGATED STRAIN TIME SERIES OF SIX SEEDS AT KP_2011 AT THE BOTTOM OF SOUTHERN LEG, CALCULATED FROM THE LAST 300 S OF SIMULATION.

all signals are shown in the legends. The critical damping values used in the numerical models are presented in Tab. 4.

Please note that the appropriate damping setting depends on how the damping is applied (modal versus stiffness/mass proportional as defined in Tab. 4) and how the mode is defined (fixed-fixed versus fixed-free). For example, in FAST a percentage of critical damping can be specified for the tower modes, as well as for the jacket modes that are derived through the Craig-Bampton (CB) reduction. Fixed bottom substructures in FAST are modeled in the SubDyn module, which assumes a fixed boundary condition at the top and the bottom of the jacket for the CB modal reduction. Therefore, the structural damping defined for the CB reduction only affects jacket internal modes and has little affect on global bending modes of the entire system that involve displacement of the TP. On the other hand, the damp-

ing in NK-UTWind, DIEGO (Rayleigh damping) and in Bladed (modal damping) is actually applied to the entire support structure (jointly to the tower and the substructure)—it is not split as in FAST. In other tools this might be done differently; therefore it is difficult to directly compare damping values used in different simulation tools.

A relatively good agreement between the measurements and the simulation results is observed at the northern and southern legs — the standard deviation of the measurement is only slightly larger than the standard deviations for the majority of simulation results. This would imply that the soil and structural damping values, which were used in the OWT models, were tuned correctly. Much larger oscillations of measurements are observed at the western and eastern legs. In this case the standard deviation of the measurements is around four times larger than the standard deviations of simulated signals. This behaviour might be attributed to the actual soil properties, since a similar directional phenomenon was also observed in the measurement of the idling turbine in LCs 1.0 and 1.1x.

CONCLUSIONS

Validation of the OWT numerical models against the full-scale open-ocean system was a particularly challenging task. The participants of OC5 Phase III did not have access to the real blade design data and the full wind turbine controller due to confidentiality—it should not be forgotten that the load effects are sensitive to the controller and airfoil properties, which were only approximated in the modeling approach. Also, large measurement uncertainties related to the open-ocean environment created additional challenges when setting up the validation LCs. There was also the need for a thorough quality check of sensor measurements, as inconsistencies were seen for ones that had been originally identified as accurate by RAVE. The estimation of an appropriate damping value for the structure turned out to be an issue. First of all, the originally provided values seemed to be too high. Second, different tools utilize different damping models for different turbine components, which made the damping tuning even more challenging.

Nevertheless, the obtained results are satisfactory and show that the numerical models can reasonably mimic the full-scale system when they are carefully tuned.

The experience from the OC5 project gathered in validating small- and full-scale systems will lead to a more rigorous validation practice, which will be developed and employed in the follow up project called Offshore Code Comparison Collaboration, Continued, with Correlation, and unCertainty (OC6). The new project will have a strong emphasis on quantifying uncertainty in test campaigns used for validation.

ACKNOWLEDGEMENTS

OWEC Tower is acknowledged for releasing the jacket substructure, transition piece, and foundation design data for Phase III.

Senvion is acknowledged for sharing the definition of the Senvion 5M wind turbine and its tower.

The RAVE consortium is acknowledged for releasing the measurement data from the alpha ventus wind farm.

This work was authored [in part] by the National Renewable Energy Laboratory, operated by Alliance for Sustainable Energy, LLC, for the U.S. Department of Energy (DOE) under Contract No. DE-AC36-08GO28308. Funding provided by the U.S. Department of Energy Office of Energy Efficiency and Renewable Energy Wind Energy Technologies Office. The views expressed in the article do not necessarily represent the views of the DOE or the U.S. Government. The U.S. Government retains and the publisher, by accepting the article for publication, acknowledges that the U.S. Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for U.S. Government purposes.

REFERENCES

- [1] Wikipedia, 2009. Lage und Detailkarte des Windparks Alpha Ventus in der Nordsee [in German], January. See also URL https://de.wikipedia.org/wiki/Alpha_ventus#/media/File:Windpark_alpha_ventus_Lagekarte.png.
- [2] Musial, W., Robertson, A., Jonkman, J., Vorpahl, F., and Popko, W., 2013. Annex 30 – Task Extension Proposal, 2014–2017 Offshore Code Comparison Collaboration Continuation (OC4). Tech. rep., International Energy Agency, September.
- [3] Jonkman, J., and Musial, W., 2010. IEA Wind Task 23 Offshore Wind Technology and Deployment. Tech. rep. NREL/TP-5000-48191, National Renewable Energy Laboratory, Golden, CO, December. See also URL <https://www.nrel.gov/docs/fy11osti/48191.pdf>.
- [4] Robertson, A., Jonkman, J., Musial, W., Popko, W., and Vorpahl, F., 2014. Final Technical Report – IEA Wind Task 30 Offshore Code Comparison Collaboration Continued. Tech. rep., The International Energy Agency Wind, April. See also URL http://www.ieawind.org/index_page_postings/task30/Task30_Final_Technical_Report.pdf.
- [5] Robertson, A. N., Wendt, F., Jonkman, J. M., Popko, W., Borg, M., Bredmose, H., Schlutter, F., Qvist, J., Bergua, R., Harries, R., Yde, A., Nygaard, T. A., de Vaal, J. B., Oggiano, L., Bozonnet, P., Bouy, L., Sanchez, C. B., García, R. G., Bachynski, E. E., Tu, Y., Bayati, I., Borisade, F., Shin, H., van der Zee, T., and Guerinel, M., 2016. “OC5 Project Phase Ib: Validation of Hydrodynamic Loading on a Fixed, Flexible Cylinder for Offshore Wind Applications”. *Energy Procedia*, **94**, September, pp. 82–101. See also URL <http://dx.doi.org/10.1016/j.egypro.2016.09.201>.
- [6] Robertson, A. N., Wendt, F., Jonkman, J. M., Popko, W., Dagher, H., Gueydon, S., Qvist, J., Vittori, F., Azcona, J., Uzunoglu, E., Soares, C. G., Harries, R., Yde, A., Galinos, C., Hermans, K., de Vaal, J. B., Bozonnet, P., Bouy, L., Bayati, I., Bergua, R., Galván, J., Mendikoa, I., Sanchez, C. B., Shin, H., Oh, S., Molins, C., and Debruyne, Y., 2017. “OC5 Project Phase II: Validation of Global Loads of the DeepCwind Floating Semisubmersible Wind Turbine”. *Energy Procedia*, **137**, October, pp. 38–57. See also URL <https://doi.org/10.1016/j.egypro.2017.10.333>.
- [7] Popko, W., Huhn, M. L., Robertson, A., Jonkman, J., Wendt, F., Müller, K., Kretschmer, M., Vorpahl, F., Hagen, T. R., Galinos, C., Le Dreff, J.-B., Gilbert, P., Auriac, B., Villora, F. N., Schünemann, P., Bayati, I., Belloli, M., Oh, S., Totsuka, Y., Qvist, J., Bachynski, E., Sørum, S. H., Thomassen, P. E., Shin, H., Vittori, F., Galván, J., Molins, C., Bonnet, P., van der Zee, T., Bergua, R., Wang, K., Fu, P., and Cai, J., 2018. “Verification of a Numerical Model of the Offshore Wind Turbine from the Alpha Ventus Wind Farm within OC5 Phase III”. In Proceedings of the ASME 2018 37th International Conference on Ocean, Offshore and Arctic Engineering OMAE 2018, Madrid, American Society of Mechanical Engineers. See also URL <http://dx.doi.org/10.1115/OMAE2018-77589>.
- [8] Popko, W., 2017. OC5 Phase III – RNA and Tower Definition [Confidential]. Tech. rep., Fraunhofer Institute for Wind Energy Systems IWES, Bremerhaven, December.
- [9] Kaufer, D., and Cheng, P. W., 2014. “Validation of an Integrated Simulation Method with High Resolution Load Measurements of the Offshore Wind Turbine REpower 5M at Alpha Ventus”. *Journal of Ocean and Wind Energy*, **1**(1), February, pp. 30–40. See also URL <http://www.iso-pe.org/publications/jowe/jowe-01-1/JOWE-01-1-p030-arr01-Kaufer.pdf>.
- [10] Müller, K., Reiber, M., and Cheng, P., 2016. “Comparison of Measured and Simulated Structural Loads of an Offshore Wind Turbine at Alpha Ventus”. *International Journal of Offshore and Polar Engineering*, **26**(3), pp. 209–218. See also URL <https://www.onepetro.org/journal-paper/ISOPE-16-26-3-209>.
- [11] Fraunhofer IWES, 2017. OWEA Loads – Probabilistic Load Description, Monitoring and Reduction of Loads of Future Offshore Wind Turbines. See also URL <http://www.rave-offshore.de/en/owea-loads.html>.
- [12] IEC, 2009. *IEC 61400-3 Wind Turbines – Part 3: Design Requirements for Offshore Wind Turbines*. International Electrotechnical Commission, Geneva, February.
- [13] GL Garrad Hassan, 2012. RAVE – Sensor Description AV 04, Version Fraunhofer IWES, Bremerhaven, Projekt: GI-GAWINDav [in German]. Tech. rep., GL Garrad Hassan.

[14] Popko, W., 2017. OC5 Phase III – Verification of OWT Model [Confidential]. Tech. rep., Fraunhofer Institute for Wind Energy Systems IWES, Bremerhaven, December.

[15] IEC, 2005. *IEC 61400-1 Wind Turbines – Part 1: Design Requirements*, 3 ed. International Electrotechnical Commission, Geneva, August.