

# On the initial higher-order pressure convergence in equal-order finite element discretizations of the Stokes system



Douglas R.Q. Pacheco<sup>a,b,\*</sup>, Olaf Steinbach<sup>b</sup>

<sup>a</sup> Department of Mathematical Sciences, Norwegian University of Science and Technology, Trondheim, Norway

<sup>b</sup> Institute of Applied Mathematics, Graz University of Technology, Graz, Austria

## ARTICLE INFO

### Keywords:

Incompressible flow  
Stokes system  
Finite element methods  
Numerical analysis  
Stabilized finite element methods  
Superconvergence

## ABSTRACT

In incompressible flow problems, the finite element discretization of pressure and velocity can be done through either stable spaces or stabilized pairs. For equal-order stabilized methods with piecewise linear discretization, the classical theory guarantees only linear convergence for the pressure approximation. However, a higher order is often observed, yet seldom discussed, in numerical practice. Such experimental observations may, in the absence of a sound a priori error analysis, mislead the selection of finite element spaces in practical applications. Therefore, we present here a numerical analysis demonstrating that an initial higher-order pressure convergence may in fact occur under certain conditions, for equal-order elements of any degree. Moreover, our numerical experiments clearly indicate that whether and for how long this behavior holds is a problem-dependent matter. These findings confirm that an optimal pressure convergence can in general not be expected when using unbalanced velocity-pressure pairs.

## 1. Introduction

The Stokes system of incompressible creeping flows is a mixed problem having a scalar pressure  $p$  and a velocity vector  $\mathbf{u}$  as primal unknowns. The stability and convergence of finite element discretizations for this saddle-point problem are subject to the well-known Babuška–Brezzi theory [1,2], which is violated for instance when both  $\mathbf{u}$  and  $p$  are approximated using the same polynomial degree. Unique solvability can be attained by using either *stable* pairs, such as in Taylor–Hood [3] and MINI [4] elements, or *stabilized* equal-order discretizations. The main weakness of equal-order (as well as of MINI) elements is the suboptimal pressure convergence resulting from the unbalanced approximation properties of the velocity and pressure spaces [5]. When using first-order elements, for example, the standard theory guarantees only linear convergence for the pressure in  $L^2(\Omega)$ , which is one order lower than the corresponding best approximation estimate [6]. Nevertheless, the order observed in numerical experiments [7–15] is often higher than 1 even for very fine meshes, which usually goes undiscussed or at least unexplained.

Around a decade ago, Eichel et al. [12] proved a half-an-order-higher pressure convergence for low-order elements in problems with very smooth solutions and uniform, orthogonal meshes. To the best of our knowledge, however, there is currently no available analysis on a

possible higher-order pressure convergence for equal-order elements of arbitrary degree and for more general meshes. In fact, Cioncolini and Boffi [14] have very recently carried out an empirical numerical investigation on unstructured meshes to assess whether the assumptions by Eichel et al. [12] might have been too strict. Despite providing insightful numerical evidence on the performance of the MINI element, the results reported by Cioncolini and Boffi [14] do not allow a definitive conclusion regarding this apparent “superconvergence”: in most cases a 3/2 slope was indeed verified, while in some examples there was an apparent degradation of this higher slope at finer levels.

In this context, we present new theoretical and numerical results on the pressure convergence of unbalanced discretizations of the Stokes system. Our theory includes equal-order pressure stabilization methods, as well as the MINI element. Developed by Arnold et al. [4], the MINI element provides one of the simplest inf-sup stable spaces for incompressible flow problems and consists of enriching a piecewise linear velocity space with bubble functions. For the Stokes system, the bubble degrees of freedom can be completely decoupled from the first-order part of the velocity, resulting in a lowest-order discretization with a simple matrix added to the pressure-pressure block [16]. This means that the Stokes system discretized with MINI elements can be considered as either a stable or a low-order stabilized formulation. For this

\* Corresponding author.

E-mail address: douglas.r.q.pacheco@ntnu.no (D.R.Q. Pacheco).

<https://doi.org/10.1016/j.camwa.2022.01.022>

Received 18 November 2021; Received in revised form 16 January 2022; Accepted 17 January 2022

reason, we include herein both MINI and equal-order elements under the umbrella of pressure-stabilized methods.

Using a Schur complement formulation, we show, under standard mesh regularity assumptions, that an *initial* higher-order pressure convergence may take place depending on certain problem- and discretization-dependent constants – similarly as in boundary element methods [17] when using equal-order elements approximating the Cauchy boundary data. In comparison to the existing theory [12], ours requires less regularity on the (exact) velocity, allows unstructured meshes and accommodates higher-order elements. Finally, we provide numerical examples demonstrating that our estimate is sharp: indeed such a superconvergence cannot be expected to hold indefinitely, eventually breaking down in most cases – even for structured, uniformly refined meshes.

## 2. The Stokes system

As a model case, we consider the Dirichlet boundary value problem for the Stokes system:

$$-\Delta \mathbf{u} + \nabla p = \mathbf{f} \quad \text{in } \Omega, \quad \text{div } \mathbf{u} = 0 \quad \text{in } \Omega, \quad \mathbf{u} = \mathbf{0} \quad \text{on } \Gamma, \quad (1)$$

where  $\Omega \subset \mathbb{R}^n$ ,  $n = 2$  or  $3$ , is a connected, bounded domain with Lipschitz boundary  $\Gamma = \partial\Omega$ . The standard variational formulation of (1) is to find  $(\mathbf{u}, p) \in \mathbf{H}_0^1(\Omega) \times L^2(\Omega)$  such that

$$\begin{aligned} \int_{\Omega} \nabla \mathbf{u} : \nabla \mathbf{v} \, dx - \int_{\Omega} p \, \text{div } \mathbf{v} \, dx &= \int_{\Omega} \mathbf{f} \cdot \mathbf{v} \, dx, \\ \int_{\Omega} q \, \text{div } \mathbf{u} \, dx + \int_{\Omega} p \, dx &= \int_{\Omega} q \, dx = 0 \end{aligned} \quad (2)$$

is satisfied for all  $(\mathbf{v}, q) \in \mathbf{H}_0^1(\Omega) \times L^2(\Omega)$ , which ensures the scaling condition

$$\int_{\Omega} p \, dx = 0$$

for any solution of (2). Using the Riesz representation, we can define linear bounded operators  $A : \mathbf{H}_0^1(\Omega) \rightarrow \mathbf{H}^{-1}(\Omega)$  and  $B : L^2(\Omega) \rightarrow \mathbf{H}^{-1}(\Omega)$ :

$$\begin{aligned} \langle A\mathbf{u}, \mathbf{v} \rangle_{\Omega} &:= \int_{\Omega} \nabla \mathbf{u} : \nabla \mathbf{v} \, dx \quad \text{for all } \mathbf{u}, \mathbf{v} \in \mathbf{H}_0^1(\Omega) \\ \langle Bp, \mathbf{v} \rangle_{\Omega} &:= \int_{\Omega} p \, \text{div } \mathbf{v} \, dx \quad \text{for all } \mathbf{v} \in \mathbf{H}_0^1(\Omega), p \in L^2(\Omega). \end{aligned}$$

We also define

$$\langle Lp, q \rangle_{\Omega} := \int_{\Omega} p \, dx \int_{\Omega} q \, dx \quad \text{for all } p, q \in L^2(\Omega).$$

Hence we can write the variational formulation (2) in operator form as

$$\begin{pmatrix} A & -B \\ B' & L \end{pmatrix} \begin{pmatrix} \mathbf{u} \\ p \end{pmatrix} = \begin{pmatrix} \mathbf{f} \\ 0 \end{pmatrix}. \quad (3)$$

Note that we have

$$\langle A\mathbf{v}, \mathbf{v} \rangle_{\Omega} = \sum_{i=1}^n \|\nabla v_i\|_{L^2(\Omega)}^2 = \|\mathbf{v}\|_{\mathbf{H}_0^1(\Omega)}^2, \quad \langle A\mathbf{u}, \mathbf{v} \rangle_{\Omega} \leq \|\nabla \mathbf{u}\|_{L^2(\Omega)} \|\nabla \mathbf{v}\|_{L^2(\Omega)}$$

for all  $\mathbf{u}, \mathbf{v} \in \mathbf{H}_0^1(\Omega)$ , and

$$\langle Bp, \mathbf{v} \rangle_{\Omega} \leq \|p\|_{L^2(\Omega)} \|\nabla \mathbf{v}\|_{L^2(\Omega)} \quad \text{for all } p \in L^2(\Omega), \mathbf{v} \in \mathbf{H}_0^1(\Omega).$$

Alternatively, we can consider a perturbed system by adding to  $L$  a stabilization operator to yield an invertible pressure-pressure block  $D$ . This is the basis for stabilized formulations, where consistency terms can also be added to the right-hand side in (3) and to the pressure-velocity block  $B'$ . In this setting, the system takes the more general form

$$\begin{pmatrix} A & -B \\ C & D \end{pmatrix} \begin{pmatrix} \mathbf{u} \\ p \end{pmatrix} = \begin{pmatrix} \mathbf{f} \\ g \end{pmatrix}, \quad (4)$$

with  $D$  non-negative and  $C$  bounded:

$$\|C\mathbf{v}\|_{L^2(\Omega)} \leq c_2^C \|\mathbf{v}\|_{\mathbf{H}_0^1(\Omega)} \quad \text{for all } \mathbf{v} \in \mathbf{H}_0^1(\Omega).$$

Since  $A$  is invertible, we can solve the first equation in (4) to get the Schur complement system

$$Sp := (CA^{-1}B + D)p = g - CA^{-1}\mathbf{f} =: f. \quad (5)$$

In other words, we have the variational formulation to find  $p \in L^2(\Omega)$  such that

$$\langle Sp, q \rangle_{L^2(\Omega)} = \langle f, q \rangle_{L^2(\Omega)} \quad \text{for all } q \in L^2(\Omega). \quad (6)$$

From the properties of  $A, B, C$  and  $D$ , on the continuous level we immediately get that the operator  $S : L^2(\Omega) \rightarrow L^2(\Omega)$  is bounded and elliptic, that is,

$$\langle Sq, q \rangle_{L^2(\Omega)} \geq c_1^S \|q\|_{L^2(\Omega)}^2 \quad \text{and} \quad \|Sq\|_{L^2(\Omega)} \leq c_2^S \|q\|_{L^2(\Omega)} \quad \text{for all } q \in L^2(\Omega).$$

Therefore, we conclude unique solvability of the variational problem (6), which will be the basis for deriving our theory.

## 3. Finite element error analysis

Let us assume a shape-regular triangulation of the domain  $\Omega$  into simplicial elements  $\Omega_{\mathcal{T}}$ , and two finite element spaces  $\Pi_h \times X_h \subset L^2(\Omega) \times \mathbf{H}_0^1(\Omega)$  for the discretization of pressure and velocity. We denote by  $h_{\mathcal{T}} := \sqrt[3]{|\Omega_{\mathcal{T}}|}$  the size of  $\Omega_{\mathcal{T}}$ , and by  $h := \max\{h_{\mathcal{T}}\}$  the global mesh size. For a conforming finite element space  $\Pi_h = S_h^{\nu}(\Omega)$  of piecewise polynomial basis functions of degree  $\nu$ , we consider the Galerkin formulation to find  $p_h \in \Pi_h$  such that

$$\langle Sp_h, q_h \rangle_{L^2(\Omega)} = \langle f, q_h \rangle_{L^2(\Omega)} \quad \text{for all } q_h \in \Pi_h.$$

Using standard arguments we arrive at Cea's lemma

$$\|p - p_h\|_{L^2(\Omega)} \leq \frac{c_2^S}{c_1^S} \inf_{q_h \in \Pi_h} \|p - q_h\|_{L^2(\Omega)},$$

and from the approximation property of  $\Pi_h$  we conclude the error estimate

$$\|p - p_h\|_{L^2(\Omega)} \leq c_1 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} \quad (7)$$

when assuming  $p \in H^{\nu+1}(\Omega)$ .

Since the composed operator  $S = CA^{-1}B + D$  in general does not allow a direct evaluation, we construct a suitable approximation by defining, for any  $p \in L^2(\Omega)$ , a vector  $\mathbf{w} = A^{-1}Bp \in \mathbf{H}_0^1(\Omega)$ , which is the unique solution of the variational formulation

$$\langle A\mathbf{w}, \mathbf{v} \rangle_{\Omega} = \langle Bp, \mathbf{v} \rangle_{\Omega} \quad \text{for all } \mathbf{v} \in \mathbf{H}_0^1(\Omega).$$

Let  $X_h := [S_h^{\mu}(\Omega) \cap H_0^1(\Omega)]^n$  be a second finite element space of polynomial basis functions with degree  $\mu$ , for which we consider the Galerkin formulation to find  $\mathbf{w}_h \in X_h$  such that

$$\langle A\mathbf{w}_h, \mathbf{v}_h \rangle_{\Omega} = \langle Bp, \mathbf{v}_h \rangle_{\Omega} \quad \text{for all } \mathbf{v}_h \in X_h.$$

From the ellipticity of  $A$  and the boundedness of  $B$  we have

$$\|\mathbf{w}_h\|_{\mathbf{H}_0^1(\Omega)}^2 = \langle A\mathbf{w}_h, \mathbf{w}_h \rangle_{\Omega} = \langle Bp, \mathbf{w}_h \rangle_{\Omega} \leq \|p\|_{L^2(\Omega)} \|\mathbf{w}_h\|_{\mathbf{H}_0^1(\Omega)},$$

that is,

$$\|\mathbf{w}_h\|_{\mathbf{H}_0^1(\Omega)} \leq \|p\|_{L^2(\Omega)}.$$

Moreover, using standard arguments, we obtain the *a priori* error estimate

$$\|\mathbf{w} - \mathbf{w}_h\|_{\mathbf{H}_0^1(\Omega)} \leq \inf_{\mathbf{v}_h \in X_h} \|\mathbf{w} - \mathbf{v}_h\|_{\mathbf{H}_0^1(\Omega)} \leq c_2 h^\mu |\mathbf{w}|_{\mathbf{H}^{\mu+1}(\Omega)}$$

when assuming  $\mathbf{w} \in \mathbf{H}^{\mu+1}(\Omega)$ . Then, instead of

$$Sp = CA^{-1}Bp + Dp = C\mathbf{w} + Dp,$$

we now define the approximate operator

$$\tilde{S}p := C\mathbf{w}_h + Dp, \tag{8}$$

for which we have

$$\|Sp - \tilde{S}p\|_{L^2(\Omega)} = \|C(\mathbf{w} - \mathbf{w}_h)\|_{L^2(\Omega)} \leq c_2^C \|\mathbf{w} - \mathbf{w}_h\|_{\mathbf{H}_0^1(\Omega)} \leq c_3 h^\mu |\mathbf{w}|_{\mathbf{H}^{\mu+1}(\Omega)}.$$

Moreover,  $\tilde{S} : L^2(\Omega) \rightarrow L^2(\Omega)$  is bounded:

$$\begin{aligned} \|\tilde{S}p\|_{L^2(\Omega)} &= \|C\mathbf{w}_h + Dp\|_{L^2(\Omega)} \leq c_2^C \|\mathbf{w}_h\|_{\mathbf{H}_0^1(\Omega)} + c_2^D \|p\|_{L^2(\Omega)} \\ &\leq (c_2^C + c_2^D) \|p\|_{L^2(\Omega)}. \end{aligned}$$

Let us assume that  $\tilde{S}$  is elliptic in  $\Pi_h$ , that is,

$$\langle \tilde{S}q_h, q_h \rangle_{L^2(\Omega)} \geq c_{\tilde{S}} \|q_h\|_{L^2(\Omega)}^2 \text{ for all } q_h \in \Pi_h,$$

which is satisfied when using either inf-sup stable finite elements or appropriate stabilization operators. Then, we consider the perturbed variational formulation to find  $\tilde{p}_h \in \Pi_h$  such that

$$\langle \tilde{S}\tilde{p}_h, q_h \rangle_{L^2(\Omega)} = \langle f, q_h \rangle_{L^2(\Omega)} \text{ for all } q_h \in \Pi_h. \tag{9}$$

We now recall the well-known Strang lemma.

**Theorem 3.1.** *Let  $\tilde{S}$  be the approximate Schur complement operator as defined in (8), and  $\tilde{p}_h$  the corresponding pressure approximation from (9). Then, under the assumptions of (7) and, additionally, the ellipticity of  $\tilde{S}$ , there holds the error estimate*

$$\|p - \tilde{p}_h\|_{L^2(\Omega)} \leq \alpha h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} + \beta h^\mu |\mathbf{w}|_{\mathbf{H}^{\mu+1}(\Omega)}, \tag{10}$$

with  $\alpha$  and  $\beta$  independent of  $h$ .

**Proof.** From the triangle inequality and the error estimate (7) we have

$$\begin{aligned} \|p - \tilde{p}_h\|_{L^2(\Omega)} &\leq \|p - p_h\|_{L^2(\Omega)} + \|p_h - \tilde{p}_h\|_{L^2(\Omega)} \\ &\leq c_1 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} + \|p_h - \tilde{p}_h\|_{L^2(\Omega)}. \end{aligned}$$

From the ellipticity of  $\tilde{S}$  in  $\Pi_h$ , we conclude

$$\begin{aligned} c_{\tilde{S}} \|p_h - \tilde{p}_h\|_{L^2(\Omega)}^2 &\leq \langle \tilde{S}(p_h - \tilde{p}_h), p_h - \tilde{p}_h \rangle_{L^2(\Omega)} \\ &= \langle (\tilde{S} - S)p_h, p_h - \tilde{p}_h \rangle_{L^2(\Omega)} \\ &\leq \|(\tilde{S} - S)p_h\|_{L^2(\Omega)} \|p_h - \tilde{p}_h\|_{L^2(\Omega)}, \end{aligned}$$

that is,

$$\begin{aligned} c_{\tilde{S}} \|p_h - \tilde{p}_h\|_{L^2(\Omega)} &\leq \|(\tilde{S} - S)p_h\|_{L^2(\Omega)} \\ &\leq \|(\tilde{S} - S)(p_h - p)\|_{L^2(\Omega)} + \|(\tilde{S} - S)p\|_{L^2(\Omega)} \\ &\leq (c_2^C + c_2^D + c_2^S) \|p_h - p\|_{L^2(\Omega)} + \|(\tilde{S} - S)p\|_{L^2(\Omega)} \\ &\leq (c_2^C + c_2^D + c_2^S) c_1 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} + c_3 h^\mu |\mathbf{w}|_{\mathbf{H}^{\mu+1}(\Omega)}, \end{aligned}$$

or

$$c_{\tilde{S}} \|p_h - \tilde{p}_h\|_{L^2(\Omega)} \leq c_4 c_1 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} + c_3 h^\mu |\mathbf{w}|_{\mathbf{H}^{\mu+1}(\Omega)}, \tag{11}$$

which concludes the proof with  $\alpha = (1 + c_4/c_{\tilde{S}})c_1$  and  $\beta = c_3/c_{\tilde{S}}$ .  $\square$

The error estimate (10) implies the choice  $\mu = \nu + 1$  to ensure an optimal order of convergence. On the other hand, choosing equal-order elements, that is,  $\mu = \nu$ , will asymptotically not result in an improved order of convergence. However, we can now show an initial higher-order convergence for the pressure approximation under certain conditions. From the triangle and Young's inequalities and the estimate (7), we get

$$\begin{aligned} \frac{1}{2} \|p - \tilde{p}_h\|_{L^2(\Omega)}^2 &\leq \|p - p_h\|_{L^2(\Omega)}^2 + \|p_h - \tilde{p}_h\|_{L^2(\Omega)}^2 \\ &\leq [c_1 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)}]^2 + \|p_h - \tilde{p}_h\|_{L^2(\Omega)}^2. \end{aligned} \tag{12}$$

As in the previous proof, we have

$$c_{\tilde{S}} \|p_h - \tilde{p}_h\|_{L^2(\Omega)}^2 \leq \|(\tilde{S} - S)p_h\|_{L^2(\Omega)} \|p_h - \tilde{p}_h\|_{L^2(\Omega)}$$

and

$$\|(\tilde{S} - S)p_h\|_{L^2(\Omega)} \leq c_1 c_4 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} + c_3 h^\nu |\mathbf{w}|_{\mathbf{H}^{\nu+1}(\Omega)}$$

for  $\mu = \nu$ . We also have

$$\begin{aligned} \|p_h - \tilde{p}_h\|_{L^2(\Omega)} &\leq \|p_h - p\|_{L^2(\Omega)} + \|p - \tilde{p}_h\|_{L^2(\Omega)} \\ &\leq c_1 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} + \|p - \tilde{p}_h\|_{L^2(\Omega)}, \end{aligned}$$

so that

$$\begin{aligned} \|p_h - \tilde{p}_h\|_{L^2(\Omega)}^2 &\leq \left[ \frac{c_4 c_1}{c_{\tilde{S}}} h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} + \frac{c_3}{c_{\tilde{S}}} h^\nu |\mathbf{w}|_{\mathbf{H}^{\nu+1}(\Omega)} \right] [c_1 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} + \|p - \tilde{p}_h\|_{L^2(\Omega)}] \\ &= \frac{c_4}{c_{\tilde{S}}} [c_1 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)}]^2 + \frac{c_3 c_1}{c_{\tilde{S}}} h^{2\nu+1} |p|_{H^{\nu+1}(\Omega)} |\mathbf{w}|_{\mathbf{H}^{\nu+1}(\Omega)} \\ &\quad + \left[ \frac{c_4 c_1}{c_{\tilde{S}}} h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} + \frac{c_3}{c_{\tilde{S}}} h^\nu |\mathbf{w}|_{\mathbf{H}^{\nu+1}(\Omega)} \right] \|p - \tilde{p}_h\|_{L^2(\Omega)}. \end{aligned}$$

Thus, due to (12) we get

$$\begin{aligned} \frac{1}{2} \|p - \tilde{p}_h\|_{L^2(\Omega)}^2 &\leq \left( 1 + \frac{c_4}{c_{\tilde{S}}} \right) [c_1 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)}]^2 \\ &\quad + \frac{c_3 c_1}{c_{\tilde{S}}} h^{2\nu+1} |p|_{H^{\nu+1}(\Omega)} |\mathbf{w}|_{\mathbf{H}^{\nu+1}(\Omega)} \\ &\quad + \left[ \frac{c_4 c_1}{c_{\tilde{S}}} h^{\nu+1} |p|_{H^{\nu+1}(\Omega)} + \frac{c_3}{c_{\tilde{S}}} h^\nu |\mathbf{w}|_{\mathbf{H}^{\nu+1}(\Omega)} \right] \|p - \tilde{p}_h\|_{L^2(\Omega)}. \end{aligned}$$

For the solution  $\mathbf{w} = A^{-1}Bp$  of the continuous problem, we can write

$$|\mathbf{w}|_{\mathbf{H}^{\nu+1}(\Omega)} = |A^{-1}Bp|_{\mathbf{H}^{\nu+1}(\Omega)} \leq c_{A,B} |p|_{H^{\nu+1}(\Omega)}.$$

So, as long as

$$\frac{|p|_{H^{\nu+1}(\Omega)}}{c_{\tilde{S}}} (c_4 c_1 h^{\nu+1} + c_{A,B} c_3 h^\nu) \leq \frac{1}{2} \gamma \|p - \tilde{p}_h\|_{L^2(\Omega)} \tag{13}$$

is satisfied for some  $\gamma < 1$ , we get

$$\begin{aligned} \frac{1-\gamma}{2} \|p - \tilde{p}_h\|_{L^2(\Omega)}^2 &\leq \left( 1 + \frac{c_4}{c_{\tilde{S}}} \right) [c_1 h^{\nu+1} |p|_{H^{\nu+1}(\Omega)}]^2 \\ &\quad + \frac{c_3 c_1 c_{A,B}}{c_{\tilde{S}}} \left[ h^{\nu+\frac{1}{2}} |p|_{H^{\nu+1}(\Omega)} \right]^2, \end{aligned}$$

so that we can finally conclude

$$\|p - \tilde{p}_h\|_{L^2(\Omega)} \leq \left( c_I h^{\nu+1} + c_{II} h^{\nu+\frac{1}{2}} \right) |p|_{H^{\nu+1}(\Omega)}. \tag{14}$$

This estimate provides an explanation for the higher (than  $\nu$ ) order often observed for the pressure convergence in numerical practice, see for instance Refs. [7–15]. Although most assumptions made towards proving (14) are rather standard, this is not the case for condition (13). In fact, how can we interpret such a condition?

For small  $h$ , the expression on the left-hand side of (13) behaves (on a logarithmic scale) as a line with slope  $\nu$ . If the right-hand side  $\|p - \tilde{p}_h\|$  is assumed to be of order  $\nu + 1/2$  for some range of  $h$ , we see

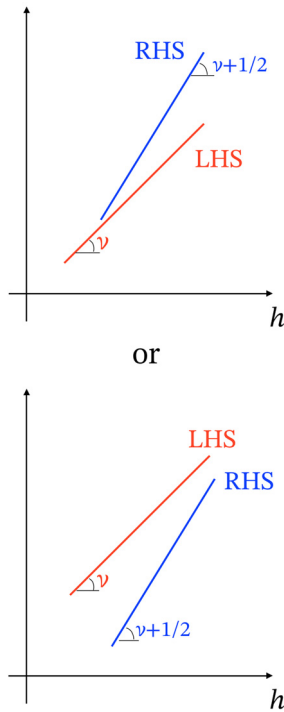


Fig. 1. Illustration of two possible scenarios for assumption (13), with LHS and RHS respectively denoting the left- and (hypothetically higher-order) right-hand sides of the inequality. Either way, the assumption cannot hold indefinitely, since sooner or later (as  $h \rightarrow 0$ ) the RHS line will be below the LHS line.

that even if condition (13) is satisfied initially, the two lines (left- and right-hand side) will eventually intersect as  $h$  decreases, and thus (13) will no longer hold. This is why estimate (14) shows only a possible initial higher-order convergence. As an alternative scenario, the curve with the higher slope may already start below the other curve, so that (13) will not hold even for the coarsest possible  $h$ , see Fig. 1 for a graphical illustration. Besides, due to the several constants in (13), whether and for how long this higher-order convergence holds may depend on various factors such as the problem (domain and solution) and the discretization. Also for this reason, the higher slope may not break down at all within a practical range of mesh sizes.

#### 4. Pressure-based stabilization methods

As realizations of the perturbed (stabilized) system (4), we now give three popular examples of pressure-stabilization methods, which will also be used in the numerical experiments. For simplicity of presentation, we consider a purely pressure-based stabilization, that is, when  $C = B'$  and  $g = 0$  in (4). The pressure-pressure operator  $D$  can be expressed through

$$\langle Dp, q \rangle_\Omega := \int_\Omega p \, dx \int_\Omega q \, dx + s(p, q) \quad \text{for } p, q \in L^2(\Omega),$$

where  $s(\cdot, \cdot)$  is a stabilizing bilinear form. Brezzi and Pitkäranta [18] designed the first and probably simplest ever stabilization method, the pressure Poisson equation (PPE):

$$s(p_h, q_h) = \alpha \sum_T h_T^2 \int_{\Omega_T} \nabla p_h \cdot \nabla q_h \, dx, \tag{15}$$

with the optimal parameter  $\alpha = 1/12$  for linear elements [5]. Another classical example is the polynomial pressure projection (PPP) method by Dohrmann and Bochev [9]:

$$s(p_h, q_h) = \int_\Omega (p_h - \pi_{\nu-1} p_h)(q_h - \pi_{\nu-1} q_h) \, dx, \tag{16}$$

in which  $\pi_{\nu-1}$  is an operator projecting  $p_h \in S_h^\nu(\Omega)$  locally onto a space with reduced polynomial degree  $\nu - 1$  (refer to Dohrmann and Bochev [9] for implementation details).

A slightly more complicated case is that of the MINI element, in which  $\Pi_h = S_h^1(\Omega)$  and  $X_h$  is constructed by enriching a first-order velocity space  $X_h^1 := [S_h^1(\Omega) \cap H_0^1(\Omega)]^n$  with a space  $X_h^b$  of standard bubble functions, for stabilization. The discretization of the variational problem (4) leads to a linear algebraic system

$$\begin{pmatrix} A_h & -B_h \\ B_h^\top & L_h \end{pmatrix} \begin{pmatrix} u_h \\ p_h \end{pmatrix} = \begin{pmatrix} f_h \\ 0 \end{pmatrix}, \tag{17}$$

with subscript  $h$  indicating the discrete counterparts of the respective operators/quantities in the infinite-dimensional case (4). It is simple to show that the spaces  $X_h^1(\Omega)$  and  $X_h^b(\Omega)$  are  $A$ -orthogonal, that is,

$$\langle A v_h^1, v_h^b \rangle_\Omega = 0 \quad \text{for all } (v_h^1, v_h^b) \in X_h^1(\Omega) \times X_h^b(\Omega).$$

Thus, by splitting  $u_h = u_h^1 + u_h^b$ , we get the system

$$\begin{pmatrix} A_h^1 & 0 & -B_h^1 \\ 0 & A_h^b & -B_h^b \\ [B_h^1]^\top & [B_h^b]^\top & L_h \end{pmatrix} \begin{pmatrix} u_h^1 \\ u_h^b \\ p_h \end{pmatrix} = \begin{pmatrix} f_h^1 \\ f_h^b \\ 0 \end{pmatrix},$$

which can be rewritten as

$$\begin{pmatrix} A_h^1 & -B_h^1 \\ [B_h^1]^\top & D_h \end{pmatrix} \begin{pmatrix} u_h^1 \\ p_h \end{pmatrix} = \begin{pmatrix} f_h^1 \\ g_h \end{pmatrix},$$

with  $D_h := L_h + [B_h^b]^\top [A_h^b]^{-1} B_h^b$  and  $g_h := [B_h^b]^\top [A_h^b]^{-1} f_h^b$ . That is, the bubble degrees of freedom can be easily eliminated (as  $A_h^b$  is diagonal), so that we effectively get an equal-order formulation with the stabilizing term  $[B_h^b]^\top [A_h^b]^{-1} B_h^b$  (further details are given by Soulaïmani et al. [16]). Although we shall stick to these three methods in our numerical examples, most pressure stabilization methods fit into the theory presented in Section 3.

#### 5. Numerical examples

We now present a series of numerical examples in order to verify our error analysis. Relative pressure errors will be measured as

$$e_{L^2(\Omega)}^p := \frac{\|p - p_h\|_{L^2(\Omega)}}{\|p\|_{L^2(\Omega)}}. \tag{18}$$

When having  $(u, p) \in \mathbf{H}^3(\Omega) \times H^2(\Omega)$ , Eichel et al. [12] proved a  $\mathcal{O}(h^{3/2})$  pressure convergence in  $L^2(\Omega)$  for first-order elements in uniform triangular meshes diagonally refined from a tensor-product grid. Hence, we aim to verify here what may happen in a more general setup. For this, we consider first-order discretizations of problems having  $(u, p) \in \mathbf{H}^2(\Omega) \times H^2(\Omega)$  but  $u \notin \mathbf{H}^3(\Omega)$ , which fits our theory but not the existing one [12]. For the refinement studies we have  $\Omega = (0, 1)^2$ , starting from the mesh depicted in Fig. 2 and then applying several levels of standard (red) uniform refinement. The linear algebraic system is solved directly to avoid the influence of iterative solver tolerances.

The first example has the exact solution

$$u = \begin{pmatrix} 0 \\ (\sin 2\pi x + |\sin 2\pi x|) \sin 2\pi x \end{pmatrix}, \quad p = 4\pi \cos 4\pi x \sin 4\pi y,$$

where the second-order gradient of the velocity has a discontinuity at  $x = 1/2$  due to the discontinuous right-hand side vector

$$f = \begin{pmatrix} -16\pi^2 \sin 4\pi x \sin 4\pi y \\ 8\pi^2 \cos 4\pi x [2\cos 4\pi y - 1 + \text{sign}(x - 1/2)] \end{pmatrix}.$$

We solve the problem using three different stabilization methods, as described in Section 4. The results of the refinement study, displayed in Table 1, confirm our *a priori* estimates: for each of the three methods, a slope between 1.5 and 2 holds for several levels, but after nine or

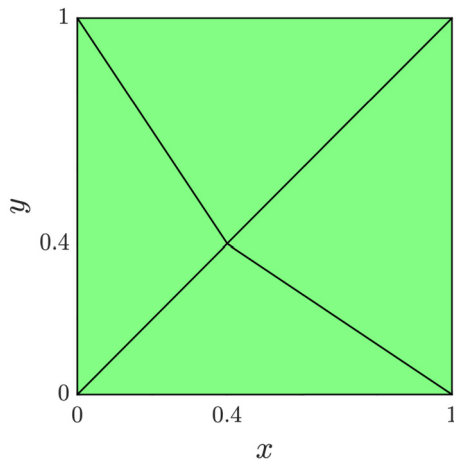


Fig. 2. Non-orthogonal grid with four triangles.

Table 1

Stokes flow with non-homogeneous boundary conditions: relative pressure error and estimated order of convergence (eoc) for three stabilization methods. The uniform refinement study starts from a coarse, non-orthogonal grid (cf. Fig. 2).

Number of elements	PPP		PPE		MINI	
	$e^p_{L^2(\Omega)}$	eoc	$e^p_{L^2(\Omega)}$	eoc	$e^p_{L^2(\Omega)}$	eoc
4	2.17e-0		1.50e-0		3.65e-0	
16	1.17e-0	0.89	1.08e-0	0.47	1.36e-0	1.42
64	9.70e-1	0.27	9.84e-1	0.13	9.43e-1	0.53
256	2.56e-1	1.92	4.42e-1	1.15	2.37e-1	1.99
1,024	7.54e-2	1.76	1.35e-1	1.71	8.53e-2	1.47
4,096	2.36e-2	1.68	3.95e-2	1.77	2.90e-2	1.56
16,384	7.67e-3	1.62	1.19e-2	1.73	9.86e-3	1.55
65,536	2.48e-3	1.63	3.62e-3	1.72	3.35e-3	1.55
262,144	8.75e-4	1.50	1.19e-3	1.61	1.19e-3	1.49
1,048,576	3.17e-4	1.46	4.00e-4	1.57	4.31e-4	1.47
4,194,304	1.29e-4	1.30	1.52e-4	1.39	1.66e-4	1.38
8,388,608	5.50e-5	1.23	6.09e-5	1.32	6.65e-5	1.32
33,554,432	2.54e-5	1.11	2.87e-5	1.08	2.86e-5	1.21

Table 2

Stokes flow with non-homogeneous boundary conditions: relative velocity error and estimated order of convergence (eoc) for three stabilization methods. The uniform refinement study starts from a coarse, non-orthogonal grid (cf. Fig. 2).

Number of elements	PPP		PPE		MINI	
	$e^u_{H^1(\Omega)}$	eoc	$e^u_{H^1(\Omega)}$	eoc	$e^u_{H^1(\Omega)}$	eoc
4	3.15e-1		3.66e-1		3.65e-0	
16	2.67e-1	0.24	2.59e-1	0.50	1.36e-0	0.21
64	1.77e-1	0.59	1.79e-1	0.53	9.43e-1	0.67
256	9.27e-2	0.93	1.02e-1	0.80	2.37e-1	0.92
1,024	4.46e-2	1.05	4.70e-2	1.12	8.53e-2	1.03
4,096	2.20e-2	1.02	2.24e-2	1.07	2.90e-2	1.02
16,384	1.09e-2	1.00	1.10e-2	1.02	9.86e-3	1.00
65,536	5.46e-3	1.00	5.47e-3	1.01	3.35e-3	1.00
262,144	2.73e-3	1.00	2.73e-3	1.00	1.19e-3	1.00
1,048,576	1.36e-3	1.00	1.37e-3	1.00	4.31e-4	1.00
4,194,304	6.83e-4	1.00	6.83e-4	1.00	1.66e-4	1.00
8,388,608	3.41e-4	1.00	3.41e-4	1.00	6.65e-5	1.00
33,554,432	1.71e-4	1.00	1.71e-4	1.00	2.86e-5	1.00

ten levels of refinement the convergence starts slowing down towards a linear behavior. For comparison, we present in Table 2 the velocity convergence in the  $H^1(\Omega)$  semi-norm, showing that the predicted linear order is already reached around the sixth level of refinement.

Then, to illustrate the problem-dependent nature of the initial higher-order pressure convergence, we consider another problem with a different solution. In the same unit square as before, with homogeneous Dirichlet boundary conditions and discontinuous forcing term

Table 3

Stokes flow with homogeneous boundary conditions: relative pressure error and estimated order of convergence (eoc) for three stabilization methods. The uniform refinement study starts from a coarse, non-orthogonal grid (cf. Fig. 2).

Number of elements	PPP		PPE		MINI	
	$e^p_{L^2(\Omega)}$	eoc	$e^p_{L^2(\Omega)}$	eoc	$e^p_{L^2(\Omega)}$	eoc
4	5.93e-1		7.84e-1		2.74e-1	
16	2.69e-1	1.15	4.44e-1	0.82	1.63e-1	0.75
64	9.43e-2	1.50	1.67e-1	1.41	4.43e-2	1.88
256	3.46e-2	1.45	5.84e-2	1.52	2.94e-2	0.59
1,024	1.14e-2	1.60	1.93e-2	1.60	1.08e-2	1.44
4,096	4.12e-3	1.47	6.48e-3	1.57	4.57e-3	1.24
16,384	1.43e-3	1.53	2.17e-3	1.58	1.74e-3	1.39
65,536	5.69e-4	1.33	7.78e-4	1.48	6.78e-4	1.36
262,144	2.30e-4	1.31	2.92e-4	1.42	2.71e-4	1.32
1,048,576	1.04e-4	1.14	1.20e-4	1.27	1.15e-4	1.23
4,194,304	4.82e-5	1.11	5.26e-5	1.20	5.16e-5	1.16
8,388,608	2.34e-5	1.04	2.45e-5	1.10	2.42e-5	1.09
33,554,432	1.14e-5	1.03	1.17e-5	1.06	1.17e-5	1.05

Table 4

Stokes flow with homogeneous boundary conditions: relative pressure error and estimated order of convergence (eoc) for three stabilization methods. The uniform refinement study starts from a coarse, orthogonal grid with four triangles.

Number of elements	PPP		PPE		MINI	
	$e^p_{L^2(\Omega)}$	eoc	$e^p_{L^2(\Omega)}$	eoc	$e^p_{L^2(\Omega)}$	eoc
4	5.45e-1		7.68e-1		3.44e-1	
16	2.43e-1	1.16	4.29e-1	0.84	1.13e-1	1.61
64	9.34e-2	1.38	1.64e-1	1.38	4.80e-2	1.24
256	3.29e-2	1.50	5.69e-2	1.53	2.16e-2	1.15
1,024	1.12e-2	1.55	1.88e-2	1.59	9.70e-3	1.16
4,096	3.78e-3	1.57	6.14e-3	1.62	3.86e-3	1.33
16,384	1.27e-3	1.57	2.00e-3	1.62	1.46e-3	1.40
65,536	4.34e-4	1.55	6.66e-4	1.58	5.34e-4	1.45
262,144	1.50e-4	1.53	2.25e-4	1.57	1.92e-4	1.47
1,048,576	5.21e-5	1.52	7.71e-5	1.54	6.87e-5	1.48
4,194,304	1.82e-5	1.51	2.67e-5	1.53	2.44e-5	1.49
8,388,608	6.41e-6	1.51	9.34e-6	1.52	8.66e-6	1.50
33,554,432	2.26e-6	1.50	3.28e-6	1.51	3.06e-6	1.50

$$f = \begin{pmatrix} 6x \\ 0 \end{pmatrix} + \chi(x) \begin{pmatrix} \pi(2x-1)(8\pi^2x^4 - 8\pi^2x^3 + 2\pi^2x^2 - 40x^2 + 16x - 1) \sin 2\pi y \\ (240x^2 - 144x + 18) \sin^2 \pi y + 2\pi^2(20x^4 - 24x^3 + 9x^2 - x) \cos 2\pi y \end{pmatrix},$$

we get the analytical solution

$$u = \chi(x) \begin{pmatrix} (4x^5 - 6x^4 + 3x^3 - \frac{x^2}{2})\pi \sin 2\pi y \\ (x - 20x^4 + 24x^3 - 9x^2) \sin^2 \pi y \end{pmatrix}, \quad p = 3x^2 - 1,$$

$$\chi(x) := 1 + \text{sign} \left( \frac{1}{2} - x \right),$$

again with  $u \in H^2(\Omega) \setminus H^3(\Omega)$ . We first perform a refinement study starting from the same non-orthogonal grid shown in Fig. 2. The results, depicted in Table 3, highlight the dependence of the initial higher-order behavior upon the chosen stabilization method: the PPE and PPP methods display higher orders for a few levels (breaking down sooner than in the previous example), while for the MINI elements the 1.5 slope is never reached.

Finally, we consider the same problem but now using orthogonal grids: the initial mesh is similar to the one in Fig. 2, but with the inner node now centralized at  $(x, y) = (1/2, 1/2)$ . The results, shown in Table 4, are quite interesting: this time, the higher-order convergence does not break down within the present range of  $h$ , and in fact the MINI elements only reach the 1.5 slope at the finest levels. Whether the convergence would eventually become linear at finer levels cannot be predicted from our theory.

### 6. Conclusions

In this work, we have presented a numerical analysis on the pressure convergence of some classical finite element discretizations of the



Stokes system. Although it is widely known that optimal convergence can be attained by going one degree higher in the velocity discretization, very little has been published to date on the pressure convergence of unbalanced pairs such as in MINI or equal-order elements. Thus, our main goal here has been to answer a rather old question surrounding finite-element-based incompressible flow approximations: *do we really lose one full order in the pressure convergence when not using balanced, Taylor–Hood-like pairs?* By considering the pressure Schur complement formulation arising after eliminating the velocity, we have been able to show that, depending on certain constants, the pressure may in fact converge one or half an order faster than predicted by standard mixed finite element theory – but not necessarily for long. We can thus speak of a *conditional* and *initial* higher-order pressure convergence in unbalanced approximations. Taking stabilized first-order elements as a model discretization, our numerical examples confirm the theory: a higher slope than one may indeed occur, but *whether* and for *how long* depends on the exact solution, the triangulation, the stabilization method, among other factors. In some cases, the higher slope may actually not break down even after several levels of refinement, but our numerical counter-examples clearly confirm that this cannot be expected in general. Although we have considered the Stokes system as a model problem, we expect similar results to hold for Navier–Stokes flows. We hope and believe that our investigation will bring some clarity into the selection of finite element spaces for incompressible flow simulations, an important part of conceptual software design.

## References

- [1] I. Babuška, The finite element method with Lagrangian multipliers, *Numer. Math.* 20 (3) (1973) 179–192.
- [2] F. Brezzi, On the existence, uniqueness and approximation of saddle-point problems arising from Lagrangian multipliers, *RAIRO. Anal. Numér.* 8 (R2) (1974) 129–151.
- [3] P. Hood, C. Taylor, Navier-Stokes equations using mixed interpolation, in: J.T. Oden, O.C. Zienkiewicz, R.H. Gallagher, C. Taylor (Eds.), *Finite Element Methods in Flow Problems*, UAH Press, 1974, pp. 57–66.
- [4] D.N. Arnold, F. Brezzi, M. Fortin, A stable finite element for the Stokes equations, *Calcolo* 21 (4) (1984) 337–344.
- [5] J. Donea, A. Huerta, *Finite Element Methods for Flow Problems*, John Wiley & Sons, New York, 2003.
- [6] D. Boffi, F. Brezzi, M. Fortin, *Mixed Finite Element Methods and Applications*, vol. 44, Springer, 2013.
- [7] T.J.R. Hughes, L.P. Franca, M. Balestra, A new finite element formulation for computational fluid dynamics: V. Circumventing the Babuška-Brezzi condition: a stable Petrov-Galerkin formulation of the Stokes problem accommodating equal-order interpolations, *Comput. Methods Appl. Mech. Eng.* 59 (1) (1986) 85–99.
- [8] T. Skalicky, A. Auge, G. Lube, Comparison and improvement of stabilized low-order approximations of the Stokes equation, *J. Appl. Math. Mech.* 76 (1996) 545–546.
- [9] C.R. Dohrmann, P.B. Bochev, A stabilized finite element method for the Stokes problem based on polynomial pressure projections, *Int. J. Numer. Methods Fluids* 46 (2) (2004) 183–201.
- [10] E. Burman, P. Hansbo, Edge stabilization for the generalized Stokes problem: a continuous interior penalty method, *Comput. Methods Appl. Mech. Eng.* 195 (19–22) (2006) 2393–2410.
- [11] S. Ganesan, G. Matthies, L. Tobiska, Local projection stabilization of equal order interpolation applied to the Stokes problem, *Math. Comput.* 77 (264) (2008) 2039–2060.
- [12] H. Eichel, L. Tobiska, H. Xie, Supercloseness and superconvergence of stabilized low-order finite element discretizations of the Stokes problem, *Math. Comput.* 80 (274) (2011) 697.
- [13] V. John, *Finite Element Methods for Incompressible Flow Problems*, Springer, New York, 2016.
- [14] A. Gioncolini, D. Boffi, The MINI mixed finite element for the Stokes problem: an experimental investigation, *Comput. Math. Appl.* 77 (9) (2019) 2432–2446.
- [15] D.R.Q. Pacheco, R. Schussnig, O. Steinbach, T.-P. Fries, A global residual-based stabilization for equal-order finite element approximations of incompressible flows, *Int. J. Numer. Methods Eng.* 122 (8) (2021) 2075–2094.
- [16] A. Soulaïmani, M. Fortin, Y. Ouellet, G. Dhatt, F. Bertrand, Simple continuous pressure elements for two- and three-dimensional incompressible flows, *Comput. Methods Appl. Mech. Eng.* 62 (1) (1987) 47–69.
- [17] O. Steinbach, A note on initial higher-order convergence results for boundary element methods with approximated boundary conditions, *Numer. Methods Partial Differ. Equ.* 16 (6) (2000) 581–588.
- [18] F. Brezzi, J. Pitkäranta, On the stabilization of finite element approximations of the Stokes equations, in: W. Hackbusch (Ed.), *Efficient Solutions of Elliptic Systems, Notes on Numerical Fluid Mechanics*, 1984, pp. 11–19.