

When to Treat Security Risks with Cyber Insurance

Per Håkon Meland
SINTEF Digital and NTNU
Trondheim, Norway
Email: per.h.meland@sintef.no

Fredrik Seehusen
SINTEF Digital
Oslo, Norway
Email: fredrik.seehusen@sintef.no

Abstract—Transferring security risk to a third party through cyber insurance is an unfamiliar playing field for a lot of organisations, and therefore many hesitate to make such investments. Indeed, there is a general need for affordable and practical ways of performing risk quantification when determining risk treatment options. To address this concern, we propose a lightweight, data-driven approach for organisations to evaluate their own need for cyber insurance. A generic risk model, populated with available industry averages, is used as a starting point. Individual organisations can instantiate this model to obtain a risk profile for themselves related to relevant cyber threats. The risk profile is then used together with a cyber insurance profile to estimate the benefit and as a basis for comparing offers from different insurance providers.

I. INTRODUCTION

Many organisations are now in the process of determining whether or not they should invest in cyber insurance. This is a new and challenging task for them, since there are not many established practices seen from the demand side. Though stand-alone cyber insurance products have been around for a couple of decades, they are still regarded as somewhat “immature, with room for improvement” [1].

The main contribution of this paper is a proposed assessment approach for organisations considering to buy cyber insurance. This is an investment decision that requires an understanding of cyber risk, but quantifying cyber risk is very challenging, even for large organisations with in-house security competence. Insurances are meant to take care of incidents that have low frequency and high impact, and single organisations are lacking historical data they can base their cost/benefit analysis on. At the same time, the technology, insurance market and threat picture are in constant development, making past experiences and data less valuable.

There have already been several publications covering various aspects for the demand side of cyber insurance. For instance, Gordon et al. [7] and Wang [24] provide frameworks for cyber risk management, where insurance is one of the means for risk reduction. Yannacopoulos et al. [8] discuss the level of coverage a firm should consider for privacy breaches given that the premium levels are set. Grossklags et al. [9] use game-theoretic models for shifting between investments in protection and self-insurance. They have showed that self-insurance may be more advantageous, especially when there are other firms that are more likely to be attacked due to weaker security. This model has been extended to also include market insurance by Johnson et al. [10]. Pal and

Golubchik [11] have proposed a mathematical framework that co-operative and non-co-operative Internet users can exploit to balance defense investments with partial and full coverage insurance models. Böhme and Schwartz [12] have developed a framework for modelling cyber insurance markets, which includes various attributes for cyber risk in relation to cyber insurance. Böhme and Schwartz also present a literature survey where both the demand and supply side are considered in this context. Later on, Mukhopadhyay et al. [13] proposed another model to help firms decide upon cyber insurance, but with focus on utility for both the insurer and insured. A cyber risk profile for individual organisations is denoted by a unique utility function, and a Copula-aided Bayesian Belief Network (CBBN) model is used for assessing and quantifying the cyber risk.

Unlike the existing approaches, ours is initiated by a generic risk model that individual organisations can specialise to obtain a more optimal and tailored risk profile model for themselves. We assume that the organisations already have protection mechanisms in place, but want to reduce residual risk of rare events through cyber insurance. To evaluate the benefit of insuring, the risk profile is evaluated with and without a suitable insurance profile. The main advantages of this approach are that it makes use of available data concerning threats, likelihood and loss, and that it does not require the organisation to share information about their risks and incidents with external parties during the consideration phase. This should in turn make the organisation better equipped for negotiations with insurance agencies or agents.

This paper is structured as follows. The background and details of the approach are explained in Section II. Section III discusses strengths and weaknesses, and section IV provides a conclusion.

II. DESCRIPTION OF THE APPROACH

The development of the approach has been motivated by a Norwegian study [14] on current practices for cyber insurance decision making. This study showed that obtaining a good understanding of cyber risk exposure is considered to be a critical, but also a very complex and challenging necessity. Risk managers and people with similar roles that already handle other types of insurance products within a company, typically do not know that much about cyber. Therefore, they find it difficult to perform cost/benefit analysis for cyber security, and to have a good and dynamic overview of the

relevant threats. Another significant observation was that not all organisations are willing to share a lot of information about their security procedures, controls and incidents with arbitrary insurance agents, since they fear that this information could be leaked and damage their reputation or be exploited for attacks. There was also a general concern on how smaller organisations, lacking security competence and resources, will be able to make proper judgement on whether to buy cyber insurance or not.

The main target group of our approach is therefore organisations with limited in-house security expertise, that are considering investing in or renegotiating a cyber insurance policy. It has been the goal of our approach to be affordable, directly applicable for practitioners, and also to take advantage of available information. It is meant to accommodate specific industrial domains, and improve over time as quantitative data becomes more reliable. We have used previous work from practical risk assessment [15], and adapted this to specifically address cyber insurance decision making.

The approach follows the steps as illustrated in Figure 1. The creation of a *generic risk model* is the first step, and is a collaborative task between security professionals, researchers and cyber underwriters. This risk model represents the typical threat events that a cyber insurance can cover, and what impact/consequences such events can lead to. The model includes sets of baseline data to be used as a starting point. The second step is performed by individual organisations to create a *risk profile* for themselves. The final step is the creation of a *cyber insurance profile*, which indicates cost reductions per threat in combination with the premium. The next sections explain these steps in more detail and with examples.

A. Assembling a generic risk model

The purpose of this step is to define a risk model which is generic in the sense that it is parametrised by *company profiles*. A company profile is set of values such as size, location and industry that can be used in order to categorise a given company. More precisely, a *generic risk model* is a triple (T, f, c) consisting of

- A set of threats T ;
- A generic frequency function f which takes a company profile cp as input and yields a mapping that for each threat t in T yields a frequency estimating how often incidents caused by t occur per year.
- A generic cost function c , which takes a company profile cp as input and yields a mapping that for each threat t in T yields the estimated cost of incidents caused by t .

The company specific *risk profile*, obtained from the generic risk model $M = (T, f, c)$ for a given company profile cp , is a triple (T_s, f_s, c_s) whose threats T are equal to the threats of M , and whose frequency and cost function are defined by $f_s = f(cp)$ and $c_s = c(cp)$ respectively.

We let rv be a function which takes a frequency v_f and a consequence v_c and yields their *risk value* defined by their product, i.e. $rv(v_f, v_c) \triangleq v_f \cdot v_c$. The risk value of a given threat can be viewed as the *annual expected loss*

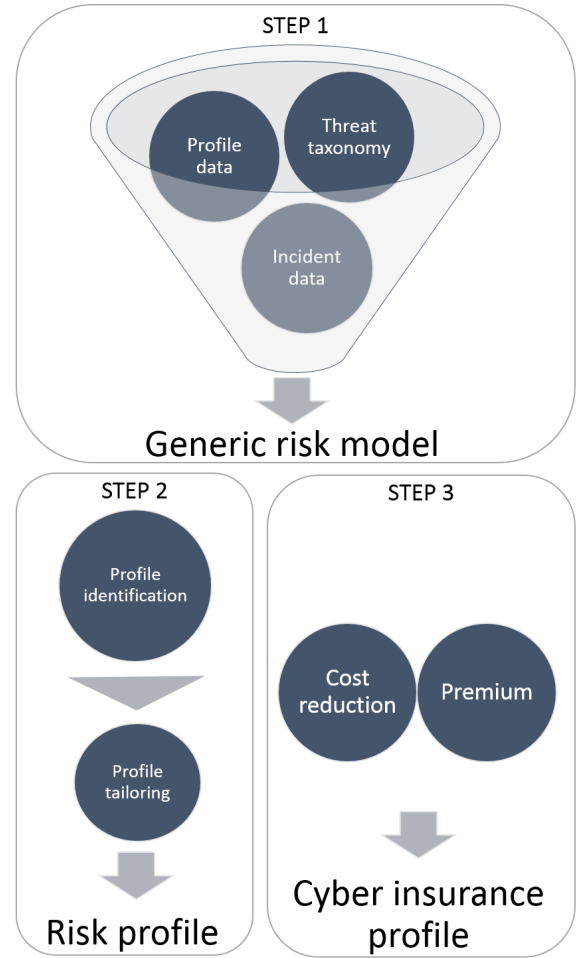


Fig. 1. Approach overview

due to incidents caused by this threat since we assume that frequencies estimate number of threat incidents *per year*.

In order to use the risk profile for determining whether or not to buy cyber insurance, we need to compute the total aggregated risk value, or the total annual expected loss due to all threats. We do not make any assumptions about overlap between threat incidents, i.e. whether the occurrence of one threat incident counts as an occurrence of an incident caused by another threat. For this reason, the total aggregated risk value is described by an interval, where the minimum interval value corresponds to the aggregated risk value in the case where there is the maximum possible overlap, and the maximum interval value corresponds to the case where there is the minimum possible overlap. More precisely, we define the total risk value of a risk profile (T_s, f_s, c_s) by the interval

$$[rv(f_{min}, c_{min}), rv(f_{max}, c_{max})]$$

where

- f_{min} is the frequency for the case where there is a maximum possible overlap defined by the maximum frequency value $max(\{f_s(t) | t \in T_s\})$;

- f_{max} is the frequency for the case where there is no overlap defined by the sum of all frequency values $\sum_{t \in T_s} f_s(t)$;
- c_{max} is the cost estimate of an arbitrary threat incident for the case where no overlap, defined by $(\sum_{t \in T_s} rv(f_s(t), c_s(t))) / f_{max}$;
- c_{min} is the cost estimate of an arbitrary threat incident for the case with overlap. The definition of c_{min} may depend on the risk profile. In this paper, we let c_{max} be an approximation of this cost, i.e. we let $c_{min} = c_{max}$. However, other definitions should be considered if this is not a reasonable approximation for the given risk profile.

In the continuation of this step, we include the following two activities for defining threats and profile type, based on data sources containing threat information, and for defining frequency and cost functions mapped to threats.

1) *Define threats and profile type*: The purpose of this activity is to define the set of threats and the possible company profile attributes of the generic risk model. The activity starts by identifying data sources that contain threat categories or taxonomies and statistics about threat occurrences and cost. After this has been done, a threat categorisation is selected from the data sources or created based on the data sources.

In our experience, nearly all data sources use different threat categorisations, thus creating a new unified categorisation is not straight forward. The data sources also tend to vary with respect to the detail and the kind of statistics they contain.

As an example for this paper, we have chosen a threat categorisation from Advisen¹ as a basis for the generic model. This is not because we think its categorisation is the best, but because it seems to have the most detailed cost data. In addition to this, we have used data from Klahr et al. [17] for estimating the likelihood of threat incidents. Advisen also contains data about how events (threat incidents) are distributed on different *industries*, and Klahr et al. [17] contains data about the frequency of cyber breaches based on *company size*. In this paper, we will therefore consider company profiles based on size and industry. Appendix A contains all the data material that we will use in this paper. Table I gives a definition of the threats T , as well as size S and industry I values considered in this paper.

2) *Define frequency and cost functions*: The purpose of this activity is to define frequency and cost functions that map threats and company profiles to frequency and cost estimates. The definition should be made on the basis of the data that have been identified in the previous activity (which in our case is summarised in Appendix A).

The definition of the frequency function f and the cost function c of our generic risk model are given in Table II. Note that the available data material is not 100% applicable for defining the frequency and cost function that we need. For instance, the estimation of percentage of companies that

have been breached due to a cyber threat is based on a survey in the UK (Klahr et.al. [17]), and it may not be applicable for companies outside the UK. Another example is related to the cost data from Advisen, where it is unclear whether the data basis is a good representation of the entire population, and not for instance skewed to data mostly from the US, to big companies or to cyber events that are particularly costly. Indeed, the cost of cyber events is estimated to be significantly higher in Advisen than in other studies from e.g. Kasperksy [18] and particularly Klahr et.al. [17]. In the definitions, we implicitly assume that the data material used is applicable.

B. Tailoring an individual risk profile

The purpose of this step is to adapt the generic risk model to a particular organisation. Unlike the previous step, the intended user is a company or organisation that considers cyber insurance. The step has two activities, first a profile is identified and a corresponding risk profile is derived from the generic risk model. Then, this risk profile is manually refined by tailoring the frequency and cost values.

In the following, we will illustrate the step in an example for a fictive company we refer to as Acme, which is a medium sized company that provides an online marketplace where users can buy and sell goods and services from each other.

1) *Instantiate generic risk model*: Based on the Acme profile (Size: *Medium* and Industry: *Services*) and the definition of our generic model in section II-A, we can automatically derive the corresponding risk profile. This risk profile is shown in Table III in the first frequency and cost columns (column two and three). Here, the frequency value represents occurrences of the given threat incidents *per year* and the cost value represent the cost of threat incidents in USD.

The frequency and cost of each threat incident are calculated by the frequency function f and the cost function c defined in Table II. For instance, the frequency for the threat $t = \text{“Data - Malicious Breach”}$, for company size $s = \text{“Medium”}$ in industry $i = \text{“Services”}$ is

$$f((s, i))(t) = b(s, i) \cdot tp(t) = 0.578 \cdot 0.376 = 0.217$$

2) *Update metrics with own data (if any)*: In this step, a domain expert can manually tailor the risk profile to her organisation. The procedure for this step is as follows: Walk through each threat, classify into one of the three categories described below, and adjust the frequency and cost accordingly. The three categories are:

- **Irrelevant threats**, i.e. threats that do not apply to the company, threats that are negligible, or threats that the company is not interested in insuring. Since the generic risk model is intended to capture all possible cyber threats, it will typically be the case that many of the threats are not relevant. For these threats, the frequency should be set to zero.
- **Familiar threats**, i.e. threats that have occurred in the past and/or occur on a regular basis. For these threats, the frequency should typically be increased, but the cost

¹The dataset we have received from Advisen is dated November 2016 and contains 33023 cyber loss events. Romanosky has described the origin of this data in [16].

| Name | Definition |
|------|---|
| T | { Data - Malicious Breach; Privacy - Unauthorized Contact or Disclosure; Data - Physically Lost or Stolen; Data - Unintentional Disclosure; Network/Website Disruption; Privacy - Unauthorized Data Collection; Identity - Fraudulent Use/Account Access; Phishing, Spoofing, Social Engineering; Skimming, Physical Tampering; IT - Processing Errors; Undetermined/Other; Cyber Extortion; IT - Configuration/Implementation Errors; Industrial Controls & Operations } |
| S | { Micro; Small; Medium; Large } |
| I | { Services; Finance, Insurance and Real Estate; Public Administration; Wholesale and Retail Trade; Manufacturing; Transportation, Communications and Utilities; Mining and Construction; Agriculture, Forestry and Fishing } |

TABLE I
DEFINITION OF THREATS T , SIZE VALUES S , AND INDUSTRY VALUES I .

| Name | Definition | Description |
|---------------------------|---|---|
| $ei(i) \triangleq$ | $ev(i)/26872$ | Percentage of cyber incidents/events that occur in industry i . Here, $ev(i)$ denotes events recorded for industry i (the “Events” column in Table VI) and 26872 denotes the total number of recorded events (last row of Table VI). |
| $tp(t) \triangleq$ | $ev(t)/33023$ | The percentage of incidents that are caused by threat t . Here $ev(t)$ denotes the number of events/incidents recorded with respect to threat t according to Advisen (the “Events” column in Table V) and 33023 is the total number of events recorded according to Advisen (last row of Table V). |
| $b(s, i) \triangleq$ | $\frac{b_s(s)ei(i)}{b_s(s)ei(i)+(1-b_s(s))si(i)}$ | The number of threat incidents per year for a company with size s in industry i . Here, $b_s(s)$ denotes the proportion of companies of size s breached within a one year period (column “Proportion breached” in Table VIII) and $si(i)$ denotes the relative size of the industry i (column “Relative size” in Table IX). We make the simplifying assumption that those companies that were breached, were breached only once, and that this breach counts as a single threat incident. |
| $f((s, i))(t) \triangleq$ | $b(s, i) \cdot tp(t)$ | The number of times per year that an incident caused by threat t occurs under the profile (s, i) , i.e. for a company with size s in industry i . |
| $c((s, i))(t) \triangleq$ | $evt(t)/tl(t)$ | The expected cost of an incident caused by threat t under company profile (s, i) . Here, $evt(t)$ denotes the number of events with recorded loss for threat t (corresponding to the “Events with loss” column in Table V) and $tl(t)$ denotes total recorded loss (corresponding to the “Total loss” column in Table V). |

TABLE II
DEFINITION OF THE FREQUENCY AND COST FUNCTIONS f AND c (AND HELPER FUNCTIONS) FOR THE GENERIC RISK MODEL.

estimate should often be decreased, since the prior experience in dealing with these kinds of threats contributes to lowering the cost. To avoid too much disalignment, adjustments in either direction can be based on the general prediction approach by Kahneman [19], which is used to adjust reference class averages with non-regressive intuitive predictions. In practice, the correlation between the risk profile attributes and the more specific attributes of the organisation can be used as a basis for this.

- **Unfamiliar threats**, i.e. threats for which there is no prior experience, but that could potentially occur. For these threats, the likelihood of the risk profile derived from the generic model provides a good starting point for frequency estimation, and should be kept unchanged if the company has no information about this threat. The same applies for the cost.

Continuing the example, we have shown the refined risk profile for the company in question in the second frequency and cost columns (the forth and fifth columns) of Table III. For Acme, physical attacks or unintended incidents are considered out of scope. The frequencies for threats in rows 3,9-11,13-14 have therefore been set to 0. Acme users buy and sell goods and services from each other, and fraudulent use of

the service happens regularly i.e. about every four months. The typical attack vector is that the attacker is able to obtain the credentials of an end-user to the site by hacking the end-user directly. Hence, Acme is not directly responsible, but it could be *perceived* that way by the market. The cost is therefore not negligible, but not as high as in the derived risk profile. Acme experiences “Network/Website Disruption” from time to time, but these issues are covered by the service level agreement with the company that hosts the online marketplace, and the cost of these kind of incidents have been lower than in the derived profile. The frequency and cost of the remaining threats have been left unchanged. In Table III, we can see that the threat with the highest risk value is “Data - Malicious Breach”. This gives an indication of the types of threats that should be in focus when considering risk transfer to cyber insurance.

C. Creating a cyber insurance profile

Central to our approach, the decision on risk transfer should be based on a *cyber insurance profile*. A cyber insurance profile is a pair (cc, p) consisting of a cost cover function cc that takes a threat t as input and yields an estimate of how much of the cost of incidents caused by t will be covered by the insurance if they occur, and a cost p , the insurance premium, estimating the cost of insurance per year. These

| Threat | Frequency | Cost | Frequency | Cost | Risk value |
|--|-----------|----------|-----------|----------|---------------------------|
| Data - Malicious Breach | 0.217 | 8538707 | 0.217 | 8538707 | 1856717 |
| Privacy - Unauthorized Contact or Disclosure | 0.116 | 5191220 | 0.116 | 5191220 | 601702 |
| Data - Physically Lost or Stolen | 0.076 | 983992 | 0.000 | 983992 | 0 |
| Data - Unintentional Disclosure | 0.074 | 1547339 | 0.074 | 1547339 | 114929 |
| Network/Website Disruption | 0.032 | 1327197 | 1.000 | 100000 | 100000 |
| Privacy - Unauthorized Data Collection | 0.012 | 1770338 | 0.012 | 177033 | 21466 |
| Identity - Fraudulent Use/Account Access | 0.012 | 3167541 | 4.000 | 100000 | 400000 |
| Phishing, Spoofing, Social Engineering | 0.011 | 40435298 | 0.011 | 40435298 | 447775 |
| Skimming, Physical Tampering | 0.011 | 1973479 | 0.000 | 1973479 | 0 |
| IT - Processing Errors | 0.007 | 92043291 | 0.000 | 92043291 | 0 |
| Undetermined/Other | 0.003 | 0 | 0.000 | 0 | 0 |
| Cyber Extortion | 0.003 | 92615 | 0.003 | 92615 | 278 |
| IT - Configuration/Implementation Errors | 0.003 | 12427442 | 0.000 | 12427442 | 0 |
| Industrial Controls & Operations | 0.001 | 42655 | 0.000 | 4265 | 0 |
| Total risk value/expected loss per year | | | | | [2608007, 3542866] |

TABLE III

THE DERIVED RISK PROFILE (SECOND AND THIRD COLUMN) AND THE MANUALLY REFINED PROFILE (FOURTH AND FIFTH COLUMNS). ONLY THE CALCULATED RISK VALUE FOR THE LATTER PROFILE IS SHOWN.

estimates must be determined based on a given insurance policy. The insurance premium is often easy to determine, but the cost coverage can be more difficult to estimate as it also requires an understanding of the exclusions of the insurance policy. For a discussion of the kind of threats that are usually covered by cyber insurance, the reader is referred to [14].

Given a risk profile and an insurance profile, the *residual cost* of each threat t is obtained by subtracting the cost cover for t from the cost of t as specified in risk profile (setting the value to zero if the cost cover happens to be greater than the cost). We can then calculate a new (residual) total risk value based on the residual cost values. An insurance profile is *beneficial* if the total residual risk value with insurance plus the insurance premium is lower than the total risk value without insurance.

Table IV gives an example of an insurance profile (column one and two), where we have assumed that the insurance covers the cost of each threat incident by 2500000 USD if they occur. Columns three and four in Table IV shows the risk profile of our running example (Table III) under this insurance profile. Here the cost of each threat incident has been reduced by 2500000 USD, nullifying most of the residual risk values. The total residual risk value ranges from 1831796 USD to 2045122 USD. In the worst case, the benefit of this insurance profile is 562885 USD, i.e. the minimum total risk value of the risk profile without insurance minus the maximum total risk value of the risk profile with insurance (Table IV). Hence, in this case, the insurance would be beneficial if the premium is below 562885 USD per year.

| Threat | Cost cover | Frequency | Cost (res.) | Risk value (res.) |
|---|------------|-----------|-------------|---------------------------|
| Data - Malicious Breach | 2500K | 0.217 | 6038707 | 1313099 |
| Privacy - Unauthorized Contact or Disclosure | 2500K | 0.116 | 2691220 | 311933 |
| Data - Physically Lost or Stolen | 2500K | 0.000 | 0 | 0 |
| Data - Unintentional Disclosure | 2500K | 0.074 | 0 | 0 |
| Network/Website Disruption | 2500K | 1.000 | 0 | 0 |
| Privacy - Unauthorized Data Collection | 2500K | 0.012 | 0 | 0 |
| Identity - Fraudulent Use/Account Access | 2500K | 4.000 | 0 | 0 |
| Phishing, Spoofing, Social Engineering | 2500K | 0.011 | 37935298 | 420090 |
| Skimming, Physical Tampering | 2500K | 0.000 | 0 | 0 |
| IT - Processing Errors | 2500K | 0.000 | 89543291 | 0 |
| Undetermined/Other | 2500K | 0.000 | 0 | 0 |
| Cyber Extortion | 2500K | 0.003 | 0 | 0 |
| IT - Configuration/Implementation Errors | 2500K | 0.000 | 9927442 | 0 |
| Industrial Controls & Operations | 2500K | 0.000 | 0 | 0 |
| Total residual risk value/expected loss per year | | | | [1831796, 2045122] |

TABLE IV

EXAMPLE OF A COST COVER FUNCTION (COLUMN ONE AND TWO) OF AN INSURANCE PROFILE AND A RISK PROFILE UNDER THIS INSURANCE PROFILE (COLUMNS ONE, THREE, AND FOUR).

III. DISCUSSION

We have designed this approach to aid cyber insurance decision making based on the identified needs from a specific country [14]. Still, we argue that this is transferable to other regions as well, since cyber threats are global, technology is converging and organisations seem to be facing the same barriers when dealing with cyber insurance.

Our notion of a risk model and risk profile is quite simple compared to other risk models we have already mentioned in the literature. First, we model likelihoods as real values representing frequencies of occurrence, but other notions of likelihood could have been possible. For instance, probabilities, intervals of probabilities or frequencies, or probability distributions. Second, we only model the likelihood that an incident caused by a threat occurs, and the cost of this incident if it occurs. However, it would also have been possible to model how often threat attacks occur, how likely it is that they succeed if they are carried out, what vulnerabilities could be exploited, what barriers are in place, etc.

There are three reasons why we have chosen to use the simple risk model. First, we are interested in defining a generic model which could apply to a large number of organisations, and we cannot rely on experiences from a particular organisation when estimating the likelihood and the cost of this model. We must therefore rely on threat statistics from available data sources in order to do the estimation. These statistics is often provided at a general level, and there is no unique and accepted source of information about e.g. economic magnitude [20], [21]. For instance, it would be difficult to find an estimate of how often a particular kind of threat attack will succeed if it is carried out. Therefore, we have chosen not to include this in the risk model. The same reason applies for the way we have modelled frequency and cost. Using probability distributions for both of these would have give more analysis options, but finding the statistical data material available need to derive these distributions is difficult. Also pointed out by [22], full probabilistic models are still in their infancy, and better cyber risk models will eventually emerge as understanding of the fundamental risk drivers develops and more data about cyber losses become available. Second, we aim to have a lightweight approach which is understandable for a non-expert, and which can be carried out in little time. The tailoring activity is meant to adjust for how the organisations perceive themselves compared to other businesses. Furthermore, the approach may be extended with more advanced utility functions for the demand side of cyber insurance, e.g. as suggested in [23], [12], [20], [24] if needed. Third, the risk model is not intended to give a completely accurate description of the cyber risks for the organisation. Instead, it is meant to be used as a *guide* for the further steps in deciding whether or not to buy cyber insurance. This can be combined with the cyber insurance decision plan suggested by Gordon et al. [7], which also includes steps for assessing insurance gaps, evaluating available policies, and selecting a specific policy. However, their work was published very early, and does not address that in practice, negotiations

are used to tailor policy coverage and price to individual insurees instead of offering standard products [1]. To quote Siemens and Beck [25]; “*buying an off-the-shelf policy can result in disaster*”.

Regardless whether or not an organisation chooses to go forward with cyber insurance, this can only be part of the solution, and should not lead to negligence of security controls. In fact, there are significant cyber-related risks that remain largely uninsurable or the coverage is modest compared with the overall exposure [22].

We have not defined as a part of our approach exactly *who* should be involved in the various steps for each organisation, since this will typically vary based on the size and type of the organisation, but an overview of suggested roles related to recommendations and decision is already given in a report from SANS [26]. A worrying finding from the same report, is that security professionals are rarely (28%) involved in the decision making process leading to the purchase of cyber insurance.

For the continuation of our work, the generic model must be further developed, preferably with better measurement data, since we found a lot of deviations between different sources. Additional profile attributes and baseline values can be added, such as number of employees, GDP, geographic location, as well as an indication of risk appetite. A vast set of rating indicators for cyber insurance have been identified by Innerhofer-Oberperfler and Breu [27], but reference datasets must be made available in order to enrich the generic risk model and create more accurate risk profiles. We share the same positive opinion as Biener et al. [28], that with increased marked development, we can expect better data sources as risk pools grow larger. Platforms for data sharing, organised by national regulators and international associations, should help keep this data accurate and updated to overcome the challenge of rapid technology development and changing threat pictures. Even so, before increasing the complexity of the actuarial data, more systematic evaluations of the approach itself should be conducted, including a sensitivity study on the use of inaccurate data. We have so far received informal feedback during workshops with the insurance industry, and they appreciate the way risk models can be matched with insurance product to help their customers. Both insurers and insurees clearly share the common goal of better cyber security quantifications based on predictive, dynamic threat models.

IV. CONCLUSION

We have observed that the demand side would like to have more practical help with deciding whether they need cyber insurance as a risk treatment option. Though several approaches for calculating insurance utility exist in the literature, they rely heavily on good input values for likelihood and costs/loss, and determining this is a great challenge for individual organisations. Our approach utilises available data sources to define a generic risk model, which is again tailored to the risk profile of individual organisations. The caveat here is that cyber event data will be quickly outdated and

irrelevant if it is not updated and improved over time. We encourage the security and insurance community to make data about emerging threats and related costs available so that organisations can make informed decisions about risk treatment on a regular basis.

ACKNOWLEDGMENT

This research has been performed as part of the inSecurance project by SINTEF Digital. We would like to thank Professor Guttorm Sindre at NTNU for feedback, all the informants that participated in the interviews for sharing their experiences and needs with us, and representatives from brokers and insurance companies with whom we have been discussion this topic. This work has been partially funded by the EU-project WISER (653321).

APPENDIX

A. Data

| Case Type | Events | Events with loss | Total loss |
|--|---------------|------------------|--------------|
| Data - Malicious Breach | 12 410 | 622 | \$5 311 075K |
| Privacy - Unauthorized Contact or Disclosure | 6 615 | 668 | \$3 467 735K |
| Data - Physically Lost or Stolen | 4 347 | 80 | \$78 719K |
| Data - Unintentional Disclosure | 4 239 | 102 | \$157 829K |
| Network/Website Disruption | 1 824 | 115 | \$152 628K |
| Privacy - Unauthorized Data Collection | 692 | 479 | \$847 992K |
| Identity - Fraudulent Use/Account Access | 675 | 102 | \$323 089K |
| Phishing, Spoofing, Social Engineering | 632 | 52 | \$2 102 635K |
| Skimming, Physical Tampering | 623 | 84 | \$165 772K |
| IT - Processing Errors | 390 | 41 | \$3 773 775K |
| Undetermined/Other | 196 | 0 | \$0K |
| Cyber Extortion | 171 | 153 | \$14 170K |
| IT - Configuration/Implementation Errors | 168 | 19 | \$236 121K |
| Industrial Controls & Operations | 41 | 2 | \$85K |
| Total | 33 023 | 2 519 | |

TABLE V
OCCURRENCES OF THREAT INCIDENTS (EVENTS) AND THEIR LOSS MEASURED IN USD. DATA SOURCE: ADVISEN

| Industry | Events |
|--|---------------|
| Services | 11 447 |
| Finance, Insurance and Real Estate | 5 633 |
| Public Administration | 4 142 |
| Wholesale and Retail Trade | 2 668 |
| Manufacturing | 1 508 |
| Transportation, Communications and Utilities | 1 238 |
| Mining and Construction | 202 |
| Agriculture, Forestry and Fishing | 34 |
| Sum | 26 872 |

TABLE VI
OCCURRENCES OF THREAT INCIDENTS DISTRIBUTED ON INDUSTRIES. DATA SOURCE: ADVISEN

| Sector size | Weight in S&P index |
|----------------------------|---------------------|
| Consumer Discretionary | 12.5 |
| Consumer Staples | 9.9 |
| Energy | 7.3 |
| Financials | 15.8 |
| Health Care | 14.7 |
| Industrials | 9.7 |
| Information Technology | 21.2 |
| Materials | 2.9 |
| Telecommunication Services | 2.6 |
| Utilities | 3.3 |

TABLE VII
INDUSTRY SECTOR SIZE BASED IN S&P INDEX. DATA SOURCE: FIDELITY [29]

| Company type | Proportion breached |
|--------------|---------------------|
| Micro | 0.17 |
| Small | 0.33 |
| Medium | 0.51 |
| Large | 0.65 |
| Overall | 0.24 |

TABLE VIII
PROPORTION OF COMPANIES IN THE UK THAT HAVE BEEN BREACHED IN A PERIOD OF 12 MONTHS. DATA SOURCE: KLAHR ET. AL [17]

B. Derived data

The data in Table IX has been derived by mapping the industry categorisation of Table VII to the categorisation of

Table VI as follows:

{Information Technology, Telecommunication Services, Health Care} \mapsto Services
 {Financials} \mapsto Finance, Insurance and Real Estate
 {} \mapsto Public Administration
 {Consumer Discretionary, Consumer Staples} \mapsto Wholesale and Retail Trade
 {Industrials} \mapsto Manufacturing
 {Energy, Utilities} \mapsto Transportation, Communications and Utilities
 {Materials} \mapsto Mining and Construction
 {} \mapsto Agriculture, Forestry and Fishing

Note that the category “Public Administration” is not covered by the categories in Table VII. In the derived Table IX, we have assumed that this industry sector is 15% of the total. The relative size of the other industries in Table IX are obtained by summing the percentages of their corresponding industries in Table VII and multiplying by 0.85 (the proportion not covered by the Public Administration sector).

| Industry | Relative size |
|--|---------------|
| Services | 32 % |
| Finance, Insurance and Real Estate | 13 % |
| Public Administration | 15 % |
| Wholesale and Retail Trade | 19 % |
| Manufacturing | 9 % |
| Transportation, Communications and Utilities | 9 % |
| Mining and Construction | 3 % |
| Agriculture, Forestry and Fishing | 0 % |

TABLE IX
RELATIVE INDUSTRY SIZE.

REFERENCES

[1] S. Hurtaud, T. Flaman, L. d. I. Vaissire, and A. Hounka, “Cyber insurance as one element of the cyber risk management strategy,” February 2015. [Online]. Available: <https://www2.deloitte.com/lu/en/pages/risk/articles/cyber-insurance-element-cyber-risk-management-strategy.html>

[2] P. H. Meland, I. A. Tøndel, and B. Solhaug, “Mitigating risk with cyberinsurance,” *IEEE Security & Privacy*, vol. 13, no. 6, pp. 38–43, 2015.

[3] T. Bandyopadhyay, V. S. Mookerjee, and R. C. Rao, “Why IT managers don’t go for cyber-insurance products,” *Commun. ACM*, vol. 52, no. 11, pp. 68–73, 2009.

[4] N. Robinson, “Incentives and barriers of the cyber insurance market in europe,” 2012. [Online]. Available: <https://www.enisa.europa.eu/publications/incentives-and-barriers-of-the-cyber-insurance-market-in-europe>

[5] F. Maude, “The role of insurance in managing and mitigating the risk,” 2015. [Online]. Available: <https://www.marsh.com/uk/insights/research/uk-cyber-security-role-of-insurance-in-managing-mitigating-risk.html>

[6] L. D. Pain, J. Anchen, M. Bundt, E. Durand, and M. Schmitt, “Cyber: In search of resilience in an interconnected world,” 2016. [Online]. Available: http://www.swissre.com/library/archive/Demand_for_cyber_insurance_on_the_rise_joint_Swiss_Re_IBM_study_shows.html

[7] L. A. Gordon, M. P. Loeb, and T. Sohail, “A framework for using insurance for cyber-risk management,” *Communications of the ACM*, vol. 46, no. 3, pp. 81–85, 2003.

[8] A. N. Yannacopoulos, C. Lambrinouidakis, S. Gritzalis, S. Z. Xanthopoulos, and S. N. Katsikas, “Modeling privacy insurance contracts and their utilization in risk management for ict firms,” in *European Symposium on Research in Computer Security*. Springer, 2008, pp. 207–222.

[9] J. Grossklags, N. Christin, and J. Chuang, “Secure or insure?: a game-theoretic analysis of information security games,” in *Proceedings of the 17th international conference on World Wide Web*. ACM, 2008, pp. 209–218.

[10] B. Johnson, R. Böhme, and J. Grossklags, “Security games with market insurance,” in *International Conference on Decision and Game Theory for Security*. Springer, 2011, pp. 117–130.

[11] R. Pal and L. Golubchik, “Analyzing self-defense investments in internet security under cyber-insurance coverage,” in *Distributed Computing Systems (ICDCS), 2010 IEEE 30th International Conference on*. IEEE, 2010, pp. 339–347.

[12] R. Böhme, G. Schwartz *et al.*, “Modeling cyber-insurance: Towards a unifying framework,” in *WEIS*, 2010.

[13] A. Mukhopadhyay, S. Chatterjee, D. Saha, A. Mahanti, and S. K. Sadhukhan, “Cyber-risk decision models: To insure {IT} or not?” *Decision Support Systems*, vol. 56, pp. 11 – 26, 2013. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0167923613001115>

[14] P. H. Meland, I. A. Tøndel, M. Moe, and F. Seehusen, “Facing uncertainty in cyber insurance policies,” in *International Workshop on Security and Trust Management*. Springer, 2017, pp. 89–100.

[15] L. M. S. Tran, B. Solhaug, and K. Stølen, “An approach to select cost-effective risk countermeasures,” in *Proceeding of 27th IFIP WG 11.3 Conference on Data and Applications Security and Privacy (DB-SEC’13)*. Springer, 2013, pp. 266–273.

[16] S. Romanosky, “Examining the costs and causes of cyber incidents,” *Journal of Cybersecurity*, p. tyw001, 2016.

[17] R. Klahr, S. Amili, J. N. Shah, M. Button, and V. Wang, “Cyber security breaches survey 2016,” 2016. [Online]. Available: https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/521465/Cyber_Security_Breaches_Survey_2016_main_report_FINAL.pdf

[18] Kaspersky Lab, “Damage control: The cost of security breaches it security risks special report series,” 2015. [Online]. Available: <https://media.kaspersky.com/pdf/it-risks-survey-report-cost-of-security-breaches.pdf>

[19] D. Kahneman, *Thinking, fast and slow*. Macmillan, 2011.

[20] M. Eling and J. H. Wirfs, “Cyber risk: Too big to insure?—risk transfer options for a mercurial risk class,” *I. VW Schriftenreihe*, vol. 59, 2016.

[21] J. Armin, B. Thompson, D. Ariu, G. Giacinto, F. Roli, and P. Kijewski, “2020 cybercrime economic costs: No measure no solution,” in *availability, reliability and security (ARES), 2015 10th international conference on*. IEEE, 2015, pp. 701–710.

[22] Swiss Re Institute, “Cyber: getting to grips with a complex risk,” Swiss Re, Tech. Rep., 2017. [Online]. Available: http://www.swissre.com/library/sigma_01_2017_en.html

[23] A. Mukhopadhyay, D. Saha, A. Mahanti, B. Chakrabarti, and A. Podder, “Insurance for cyber-risk: A utility model,” *Decision*, vol. 32, no. 1, pp. 153–170, 2005.

[24] S. Wang, “Integrated framework for information security investment and cyber insurance,” 2017. [Online]. Available: <https://dx.doi.org/10.2139/ssrn.2918674>

[25] R. Siemens and D. Beck, “How to buy cybers insurance,” *Risk Management*, vol. 59, no. 8, p. 40, 2012.

[26] B. Filkins, B. Wright, and D. Bradford, “Bridging the insurance/infosec gap: The sans 2016 cyber insurance survey,” SANS, Tech. Rep., 2016.

[27] F. Innerhofer-Oberperfler and R. Breu, “Potential rating indicators for cyberinsurance: An exploratory qualitative study,” in *Economics of Information Security and Privacy*. Springer, 2010, pp. 249–278.

[28] C. Biener, M. Eling, and J. H. Wirfs, “Insurability of cyber risk: an empirical analysis,” *The Geneva Papers on Risk and Insurance Issues and Practice*, vol. 40, no. 1, pp. 131–158, 2015.

[29] F. Investments, “Quarterly sector update, forth quarter 2016,” 2016. [Online]. Available: https://www.fidelity.com/bin-public/060_www_fidelity.com/documents/Q4%202016%20Sector%20Update_Fidelity_FINAL.pdf