

DN 40 - 400
PN 6*/10/16
Pmax = 16 bar

*on agreement



FA6530 FAGSTOP

DIAPHRAGM NON-RETURN VALVE


- Flanged centric non return valve with soft sealing for complete, quick and silent closing of the return flow
- Ensured integrity in food - processing industry
- Wide range of application
- Excellent flow characteristics
- Technical delivery conditions to EN 12266 - 1,2
- EN 19 Specification
- Face to face EN 558-1, basic series 48 (DIN 3202, F6)
- Strength test / Pressure testing to EN 12266 - P10, P11
- Flanged connections EN 1092-2 PN 10/16

ORDER CODE

EN-GJS-400-15U (JS1030), GGG 40 02		EN-GJL-250 (JL 1040), GG 25 01		Pressure rating PN 10 10 PN 16 16		Nominal size DN 40 - 400	
Seal material		EPDM (Nordel) -30°C ... 90°C E		NBR (Perbunan) -20°C ... 50°C P			
Guide material		EN-GJS-40015-U (JS1030), GGG 40 02		EN-GJL-250 (JL 1040), GG 25 01			

Other materials for body, guide and seal are also available on agreement and on placing the order.

TECHNICAL DRAWING

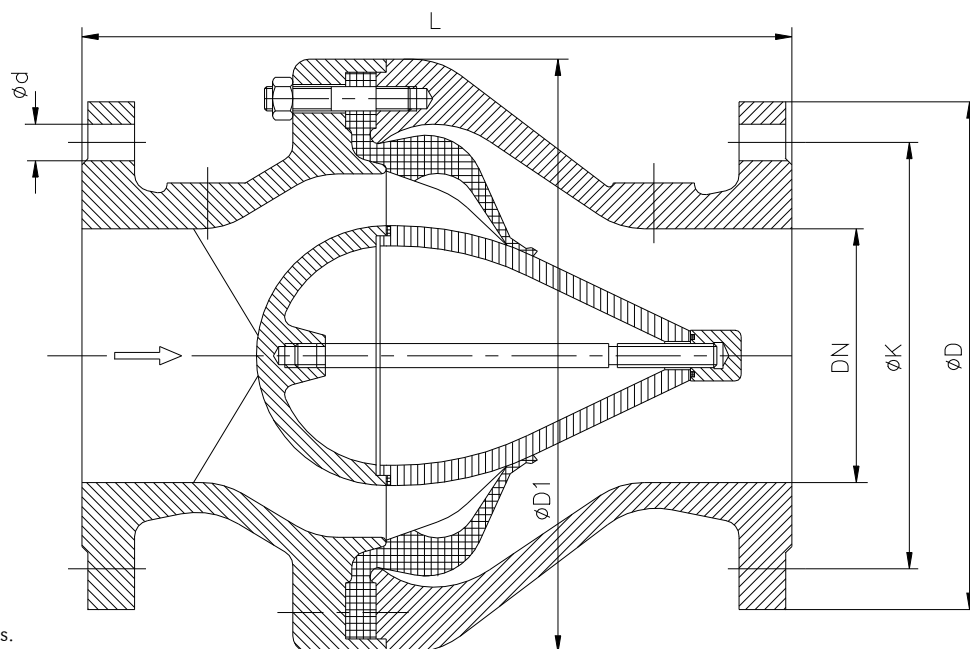

We have the right to technical changes.

TECHNICAL INFORMATION

MEVA VALVE DIMENSIONS													
			Flange PN10				Flange PN16				Flow characteristic		Weight
DN	L	D1	D	Dk	n	φd	D	Dk	n	φd	Kv (m3/h)	ζ (-)	kg
40	180	150	150	110	4	18	150	110	4	18	25.28	6.41	9.50
50	200	175	165	125	4	18	165	125	4	18	38.05	6.91	14.10
65	240	220	185	145	4	18	185	145	4	18	65.40	6.68	16.00
80	260	220	200	160	8	18	200	160	8	18	99.78	6.58	24.00
100	300	292	220	180	8	18	220	180	8	18	157.65	6.44	49.00
125	350	292	250	210	8	18	250	210	8	18	236.62	6.98	50.50
150	400	292	285	240	8	22	285	240	8	22	351.76	6.55	55.00
200	500	380	340	295	8	22	340	295	12	22	646.08	6.13	101.00
250	600	446	405	350	12	22	405	355	12	26	972.03	6.61	146.00
300	700	550	460	400	12	22	460	410	12	26	1407.05	6.55	251.00
350	800	645	505	460	16	22	-	-	-	-	1915.33	6.54	352.00
400	900	720	565	515	16	26	-	-	-	-	2526.89	6.41	423.00

All dimensions are in mm.

MEVA TEST			
Pressure rating (bar)	TEST PRESSURE (bar)		Max. operating pressure at
	Body	Sealing	80° C (bar)
10	16	10	10
16	24	16	16

Adresse/Address
Fagerberg Norge AS
Årvollskogen 33
1529 Moss

Telefon/Telephone
+ 47 69 35 55 30
Telefax/Telecopy
+ 47 69 35 55 31

E-post/E-mail
post@fagerberg.no
Hjemmeside/Web-site
www.fagerberg.no

Bankonto/Bank account
5183.05.40869
Foretaksnr./Reg. No.
NO 856 326 942 MVA

